MICHELIN X® LINE™ ENERGY™ Z2

315/70 R 22.5 156/150L



Environmental Product Declaration

In accordance with ISO 14025:2010

EPD® REGISTRATION NUMBER: S-P-04440

ISSUE DATE:22/11/2021

VALIDITY DATE: 22/11/2026







Tomorrow, everything at Michelin will be sustainable

> Florent Menegaux, Chief Executive Officer

OUR PURPOSE

OFFERING EVERYONE A BETTER WAY FORWARD

Because we believe that mobility is essential for human development, we are innovating passionately to make it safer, more efficient and more environmentally friendly.

Our priority and firm commitment is to offer our customers uncompromising quality.

Because we believe that all of us deserve personal fulfillment, we want to enable everyone to do his or her best, and to make our differences a valuable asset.

Proud of our values of respect for customers, people, shareholders, the environment and facts, we are sharing the adventure of better mobility for everyone.



SUSTAINABILITY MEANS REDUCING THE LIFE CYCLE IMPACTS OUR PRODUCTS & SERVICES




Across the value chain Michelin is:

- ✓ Reducing CO₂ emissions to achieve its targets validated by SBTi*
- Taking multiple actions under its biodiversity commitments
- ✓ Integrating life cycle assessment into the tire design process



ON THE PATH TO REACH CARBON NEUTRALITY

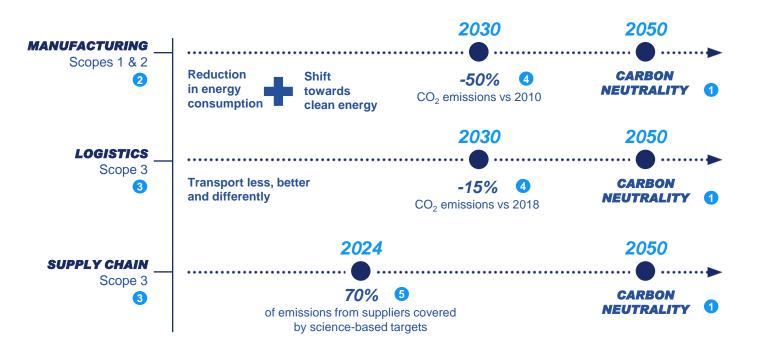






with 40% of sustainable raw materials in 2030, 100% in 2050

* European project funded by Horizon 2020, project number : 82068 ** With the support of ADEME (ADEME: French Environment & Energy Management Agency)



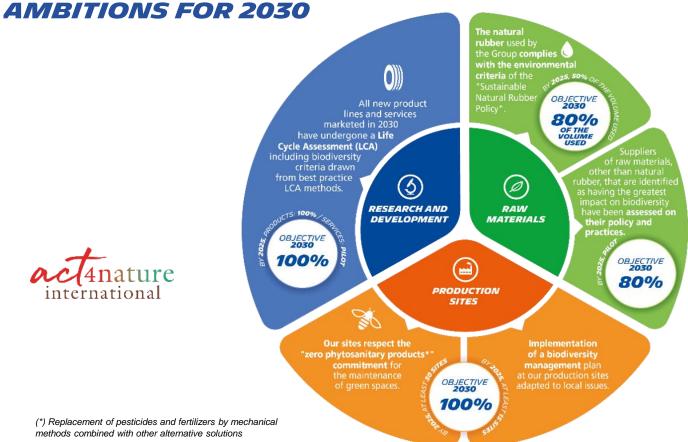



SUSTAINABLE MOBILITY FOR TRANSPORT SOLUTIONS

Sustainability is at the core of what we do, a driver for growth and part of our ongoing journey toward All Sustainable Transport Solutions







WHY THIS EPD?

Corporate Michelin pledge is "Everything will be sustainable". We have developed an offer designed to contribute to a safer, greener, more efficient and more accessible mobility.

Our approach is now more comprehensive approach, long-term **and fully transparent:** the **Environmental Product Declaration (EPD)** is a mark of our good faith to take into account the total **environmental impact of our products.**

Several types of environmental impacts were evaluated in this life cycle assessment with a LCA :

- direct impacts to global warming and to ecosystem and human health
- · indirect impacts from the use and reuse of resources.

This EPD is based on verified life cycle analysis (LCA) data. It summarizes and communicates transparent and comparable information about the **environmental impact of the product at each phase of its life cycle**, to inform our customers and other interested parties.



MICHELIN X LINE ENERGY Z2 & D2

Go further with lower fuel consumption for Long-Haul applications





1/ Reduce fuel consumption by 0.8/1/100 km in comparison with previous MICHELIN X UNE ENERGY generation thanks to grade A labelling in rolling resistance. Certified value using VECTO calculation tool comparing CO2 emissions of standard 445kW/12.71 tractor-trailer ensemble equipped with MICHELIN X® LINE[™] ENERGY[™] Z2/D2/T with grade A labelling for rolling resistance and the same vehicle equipped with MICHELIN X® LINE[™] ENERGY[™] Z2/D2/T with grade A labelling for rolling resistance and the same vehicle equipped with MICHELIN X® LINE[™] ENERGY[™] Z2/D2/T with grade A labelling in rolling resistance. Certified value using VECTO calculation tool comparing CO2 emissions of standard 445kW/12.71 tractor-trailer ensemble equipped with MICHELIN X® LINE[™] ENERGY[™] Z2/D2/T with grade A labelling for rolling resistance and the same vehicle equipped with MICHELIN X® LINE[™] ENERGY[™] Z2/D2/T with grade A labelling and verage cargo load of 17t.

2/Total cost of ownership comparison made between MICHELIN and its premium competions having a RRT grade A in 315/70R22.5 the size. Using for price positioning a panel of published European competitor price lists in 2020 ; for wear comparison: information on Internet website publication, competitors' having a RRT grade A in 315/70R22.5 the size. Using for price positioning a panel of published European competitor price lists in 2020 ; for wear comparison: information on Internet website publication, competitors' having a RRT grade A in 315/70R22.5 the size. Using for price positioning a panel of published European competitor price lists in 2020 ; for wear comparison: information on Internet website publication, competitors' having a RRT grade A in 315/70R22.5 the size. Using for price positioning a panel of published European competitor price lists in 2020 ; for wear comparison: information on Internet website publication, competitors' having a RRT grade A in 315/70R22.5 the size. Using for price positioning a panel of published European competitor price lists in 2020 ; for wear comparison: information on Internet website publication, competitors' having a RRT grade A in 315/70R22.5 the size. Using for price positioning a panel of published European competitor price lists in 2020 and 2021 ; for lud

3/ Demonstrated in an onfield mileage study (DEKRA report n# 19CPA11-129 - Echemar) performed in Spain in 2019-2021

4/ Labelling B for wet grip and 3PMSF marking. Performances at worn stage thanks to Regenion Technology (self-regenerating tread blocks - new grooves emerge over the tyre life for enhanced mobility)

5/ MICHELIN X LINE ENERGY Z2 and D2 have reduced weight by more than 5% in comparison with previous X LINE ENERGY generation

Average Weight of 315/60R22.5 MICHELIN X LINE ENERGY Z2 and D2 are 56,4kg and 58,7kg in comparison with previous tire generation 315/60R22.5 MICHELIN X LINE ENERGY Z and D, 61,8kg and 60,8kg.

Centrile's value using VECTO calculation tool comparing CO2 emissions of standard 445kW/12.71 tractor-trailer ensemble equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D2/T with grade A labeling for rolling resistance and the same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D2/T with grade A labeling for rolling resistance and the same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENERGY[™] Z/D7 available same vehicle equipped with MICHELIN X@ LINE[™] ENE

6/ up-to 2.2 T of CO2 emissions / 100 000 km in comparison with previous MICHELIN X Line Energy generation thanks to grade A labelling in rolling resistance (VECTO tool calculations).

7/ The dimension 315/70R22,5, the only one available within MICHELIN X LINE ENERGY Z2/D2 range represents a massive (more than 70%) and growing part of the Long Haul usage market (ETRMA data 2015-2021)

& Brand holes - "GFK 2017" study, for a panel of grant buyers of new articulated trucks, located in Germany, Poland and the United Kingdom: MICHELIN is the brand most often chosen in optional mounting ; Tyre range choice : "KBI 2019" Michelin internal study: The MICHELIN X LINE ENERGY range is the highest-selling MICHELIN reference in Europe in 2019, sold by MICHELIN is the brand most often chosen in optional mounting ; Tyre range choice : "KBI 2019" Michelin internal study: The MICHELIN X LINE ENERGY range is the highest-selling MICHELIN reference in Europe in 2019, sold by MICHELIN is the brand most often chosen in optional mounting ; Tyre range choice : "KBI 2019" Michelin internal study: The MICHELIN X LINE ENERGY range is the highest-selling MICHELIN reference in Europe in 2019, sold by MICHELIN is the brand most often chosen in optional mounting ; Tyre range choice : "KBI 2019" Michelin internal study: The MICHELIN X LINE ENERGY range is the highest-selling MICHELIN reference in Europe in 2019, sold by MICHELIN is the brand most often chosen in optional mounting ; Tyre range choice : "KBI 2019" Michelin internal study: The MICHELIN X LINE ENERGY range is the highest-selling MICHELIN reference in Europe in 2019, sold by MICHELIN is the brand most often chosen in optional mounting ; Tyre range choice : "KBI 2019" Michelin internal study: The MICHELIN X LINE ENERGY range is the highest-selling MICHELIN reference in Europe in 2019, sold by MICHELIN is the brand most often chosen in optional mounting ; Tyre range choice : "KBI 2019" Michelin internal study: The MICHELIN reference in Europe in 2019, sold by MICHELIN reference in Europe in 2019, sold



MICHELIN X LINE ENERGY Z2 & D2

Michelin, the first truck tire manufacturer to go through EPD registration, showing alliance of sustainable mobility and high performance thanks to the latest Michelin technologies





MICHELIN X LINE ENERGY

315/70R22.5 MICHELIN X LINE ENERGY Z2 TL 156/150L



SYNTHETIC RUBBER

6.30kg (11.1%)

NATURAL RUBBER 20.70kg (36.5%)


STEEL 12.13kg (21.4%)

SILICA 4.38kg (7.7%)

CARBON BLACK 8.85kg (15.6%)

OTHER MATERIALS* 4.37kg (7.7%)

*Chemicals and additives







CONTENT DECLARATION

EPD type & region of applicability:

Cradle to grave, Europe

Tire designation information:

- Tire size: 315/70 R22.5
- Tire mass: 56.74 kg
- Tire sub-categories: Long Haul truck tire
- Nominal section width: 315mm
- Aspect ratio: 70
- Casing construction: 5 Steel plies
- Rim diameter: 22.5 inches
- Load index: 156
- Speed rating: L

Retreadability: Yes

Rolling resistance coefficient value: 3.8 kg/t

Tire category: Long Haul truck tire

Functional unit: 1 tire driven 1000km

LCA software: Simapro release 9.1.1.1

LCI databases: Ecolvent 3.6

Plant: Michelin plant in Aranda, Spain An EPD® within the same product category but from different programmes may not be comparable.

Calculated impacts are only related to tires within the scope of this PCR and shall not be compared to vehicle performance.



UNDERSTANDING ENVIRONMENTAL IMPACTS



· Contribution to global warming is measured by the emission of greenhouse gases.



Ecosystem health impacts are measured by:

- Emissions of sulfur dioxide and other chemical substances that create **acid rain** which in turn damages terrestrial and freshwater ecosystems in a process called "acidification "
- Released chemicals that damage **the ozone layer** and its ability to absorb ultraviolet radiation that is harmful to plant life
- Nutrients that degrade freshwater bodies through the loss of oxygen and acidification in a process called "eutrophication"



Human health impacts are measured by:

- Air pollution caused by:
 - emissions of particulate matter
 - formation of photochemical ozone, a major contributor to smog
- released chemicals that **damage the ozone** layer and its ability to absorb ultraviolet radiation that is harmful to humans



Use of ressource:

- withdrawal of freshwater
- · energy generation from both renewable and non-renewable sources
- depletion of minerals, fossil fuels and other non-living or "abiotic" resources that are non-renewable



Reuse of resources:

- mass of the product remaining at end of life
- · ability to reuse the product's components
- · recycling of the product by recovering materials and energy



Product stage: it represents the cradle-to-gate impacts of a tire, including the processes that provide the material and energy inputs into the product system, manufacturing of raw materials into the finished tire, and transport processes up to the factory gate, as well as the processing of any waste arising from the processes.



- **Mounting stage:** includes the activities from the tire factory to the final user, i.e., successive transport stages.
- Use stage: includes the activities covering the period from the handover of the tire until it reaches its end of life, including the fuel/energy consumption and related emissions attributable to the tire, and particle emissions related to tire and road abrasion.



End of life stage: The end of life stage of the tire product starts when it is removed from the vehicle, does not provide any further operational function, and is at the end of the reference service life. It includes the transportation of the tire to the end of life treatment facility and the end of life treatment of tires being landfilled or incinerated without energy recovery.

(*) see UL PCR Tires: UL 10006 version 3.04 for any further details



environmental impact category

			<u>i</u> l <u>a</u>	PRODUCT STAGE			W USE STAGE	END O	F LIFE STAGE
Europe (ILCD Method)	UNIT	TOTAL	RAW MATERIALS	TRANSPORTATION	MANUFACTURING	DISTRIBUTION	TIRE IN USE	TIREEND OF LIFE TRANSPORTATION	TIRE END OF LIFE TREATMENT
3 Global warming potential	kg CO ₂ eq	2.81E+01	2.42E-01	2.90E-02	3.92E-02	2.02E-02	2.78E+01	6.44E-05	3.21E-05
Acidification potential	mol H+eq	9.58E-02	2.04E-03	3.91E-04	6.33E-05	7.86E-05	9.33E-02	2.24E-07	3.01E-07
Eutrophication potential (freshwater aquatic)	kg Peq	2.57E-04	1.14E-04	1.47E-07	4.12E-06	1.98E-07	1.39E-04	3.27E-10	1.33E-08
Photochemical ozone formation potential	kg NMVOCeq	8.89E-02	8.87E-04	2.52E-04	1.03E-04	8.07E-05	8.76E-02	2.12E-07	3.68E-07
Ozone depletion potential	kg CFC-11eq	5.10E-06	4.05E-08	5.18E-09	8.10E-09	3.69E-09	5.04E-06	1.19E-11	4.65E-12
Abiotic depletion potential	kg Sbeq	1.35E-05	6.93E-06	5.93E-09	2.34E-08	8.30E-09	6.57E-06	1.55E-11	1.42E-11

IF INDICATORS DESCRIBING RESOURCE USE

V		PRODUCT STAGE			W USE STAGE	END OF	LIFE STAGE		
	UNIT	TOTAL	RAW MATERIALS	TRANSPORTATION	MANUFACTURING	DISTRIBUTION	TIRE IN USE	TIREEND OF LIFE TRANSPORTATION	TIRE END OF LIFE TREATMENT
Total use of RENEWABLE primary energy	MJ	1.04E+00	2.09E-01	5.49E-04	2.88E-01	3.97E-04	5.45E-01	1.28E-06	9.82E-06
Total use of NON-RENEWABLE primary energy	MJ	4.21E+02	6.32E+00	4.26E-01	6.79E-01	3.04E-01	4.14E+02	9.74E-04	4.55E-04
Use of fresh water resources	_m 3	1.23E-01	1.15E-02	9.90E-05	1.01E-03	8.15E-05	1.10E-01	2.59E-07	5.99E-07



INDICATORS DESCRIBING PARTICULATE EMISSIONS

	Unit per FU/DU	TOTAL
Particulate matter (PM10)	kg	4.02E-04
Particulate matter (PM2.5)	kg	1.24E-04

C INDICATORS DESCRIBING WASTE AND RESOURCE RECOVERY

	Unit per FU/DU	TOTAL
Tire end-of-life treatment	kg	1.32E-01
Components for reuse	kg	0.00E+00
Materials for recycling	kg	6.98E-02
✓ Materials for energy recovery	kg	5.04E-02
 Exported energy (materials for energy recovery) 	MJ	1.33E+00





EPD PROCESS CERTIFICATION	CONTACT	LCA AUTHOR	PROGRAMME OPERATOR
B U R E A U V E R I T A S	MICHELIN	MICHELIN	THE INTERNATIONAL EPD® SYSTEM
- Third party verifier: M. Damien PRUNEL LCIE BUREAU VERITAS 33, Avenue du Général Leclerc 92260 Fontenay aux Roses - France damien.prunel@bureauveritas.com	Manufacture Française des Pneumatiques MICHELIN 23, Place des Carmes Dechaux 63040 Clermont-Ferrand Cedex 09 FRANCE For additional information related to the activities of the Michelin Group: www.michelin.com	Nicolas Jeannoutot nicolas.jeannoutot@michelin.com	EPD® International AB info@environdec.com The International EPD® System EPD International AB Box 210 60 SE-100 31 Stockholm Sweden www.environdec.com
 Accredited by: Recognized individual verifiers, approved by the International EPD[®] System. 	In regards to this environmental declaration, please contact: Nicolas Beaumont , Sustainable Development and Mobility department, <u>nicolas.beaumont@michelin.com</u>		



ANNEX

SLIDE 4 ON THE PATH TO REACH CARBON NEUTRALITY

GHG (Green House Gas) Protocol definition

(1) Carbon Neutrality : Having a net zero Carbon Footprint, or in other words, balancing the amount of carbon Emissions released into the Atmosphere with an equivalent amount of carbon removal, or simply eliminating carbon Emissions altogether.

(2) SCOPE 1 Direct GHG emissions occur from sources that are owned or controlled by the company, both stationary and mobile sources. SCOPE 2 GHG emissions from the generation of purchased electricity, steam and heating/cooling consumed by the company
(3) SCOPE 3 emissions are a consequence of the activities of the company but occur from sources not owned or controlled by the company. These activities are organized into 15 categories, 8 of which represent the upstream value chain and 7 the downstream value chain.
(4) GHG A greenhouse gas (GHG or GhG) is a gas that absorbs and emits radiant energy within the thermal infrared range, causing the greenhouse effect. CO₂ is Greenhouse gas.

(5) Science Based targets Initiatives (SBTi) : The Science Based Targets initiative (SBTi) is a leading independent international organization which encourages participating companies to set greenhouse gas (GHG) emissions-reduction targets. SBTi Partners: UN Global Compact (UNGC) | CDP (Carbon Disclosure Project)|World Resources Institute (WRI) | WWF (World Wildlife Fund)



General Programme Instructions of the International EPD[®] System. Version 4.0 | 2021-11-18

All Contents - RCS 495 289 399 - 2021-11 - 21110338

