

# **Environmental Product Declaration**





In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

#### Stainless Steel Pipes, a-collection

from

#### Ahlsell AB



Programme

Programme operator

EPD registration number

Publication date

Revision date

Valid until

**EPD International AB** 

The International EPD® System


S-P-10996

2023-12-08

2023-12-13

2028-12-07

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com

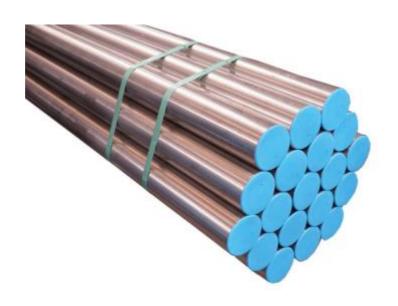





#### **General Information**

Programme infor	Programme information					
Programme	The International EPD® System					
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden					
Website	www.environdec.com					
E-mail	info@environdec.com					

Accountabilities fo	Accountabilities for PCR, LCA and independent, third-party verification						
Product Category Rules (PCR)	Product Category Rules (PCR): Construction products, 2019:14, Version 1.3.1						
Life Cycle Assessment (LCA)	Carbonzero AB						
Third-party verification:	Independent third-party verification of the declaration and data, according to ISO 14025:2006:  ☑ EPD process certification  Vladimír Kocí, LCA Studio  ☐ LCA Studio  Approved by: The International EPD® System						
Procedure for follo	w-up of data during EPD validity involves third party verifier:   Yes   No						

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.





Company informat	Company information						
Owner of the EPD	My Title						
Contact	Andrea Wästlund						
Description of the organisation	Ahlsell is present where people reside, work, and live their lives. Ahlsell is currently the Nordic region's leading community-building distributor of installation products, tools, and supplies for installation, construction, real estate management, industrial and power companies, and the public sector. With around 7,500 employees, 300 stores, ecommerce, and four central warehouses, we are working daily to achieve our vision of building a more sustainable society.						
Product-related or management system-related certifications:	ISO 9001& ISO 14001						
Name and location of production site(s):	Name of plant: Manufacturing plant Location: Sweden						

Product information	Product information						
Product name(s)	42X1.5MM PIPE 316L 3M STAINLESS STEEL A-PRESS						
Product description:	Pipes in stainless steel 316L, especially intended for tap water systems. 15-108 mm type approved for tap water installations. The dimensions 15-54 mm are delivered with a pressure indicator. Our stainless press system is also suitable for heating, cooling, and compressed air systems in civil and industrial areas.						
RSL	50 years						
UN CPC code	41292 - Tube or pipe fittings, of cast-iron or of cast-steel						

LCA information	
Functional unit / declared unit	1 kg of Stainless Steel Pipes
Time representative-ness	Data obtained refer to the year 2022
System Boundary	The system boundaries are set to be "cradle-to-gate" with modules A4, C1-C4, and D for end-of-life.
Database(s) and LCA software used	Eando X version 1.01





	A2	A3	A4	A5	B1-7	C1-4
Extraction and processing of raw materials	Transport of raw materials	Manufact- uring	Transport to end user	Installation on site	User	End of life
		ΓīŢ		<b>%</b>	£\(\alpha\)	EOL ♣

## **D** Benefits and loads beyond the system boundary

A1	Raw material supply	This module considers the extraction and processing of all raw materials, energy, and transportation which occur upstream to the studied manufacturing process, including packaging material.				
A2	Transport to the manufacturer	The raw materials are transported to the manufacturing site.				
А3	Manufacturing	This module includes all resources used to produce and waste produced. This also includes additives and packaging material.				
Α4	Transport	Transportation from the manufacturing site to distribution centre and then from the distribution centre to the building site is included.				
	Transport Scenario	Truck: 200km				
A5	Construction installation	This stage is not declared.				
B1- B7	Use stage	This stage is not declared.				
C1	Deconstruction/Demo lition	This stage includes the de-construction and/or demolition of the building. This is not relevant as the product included in this study is not used in the construction process.				
C2	Transport	This stage represents the transport distance to the waste processing facility.				
C3	Waste processing	This stage includes any waste treatment needed.				
U3	EOL Scenario	Landfill 10%. Incineration 0%. Recycling 90%.				
C4	Final disposal	This includes any material that is landfilled.				
D	Benefits	Emission credits obtained from energy recovery and/or recycling materials				





Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage		Assembly stage			Use stage					En	d of li	fe sta	ge	Benefits & loads beoyond system boundary		
	Raw Materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery - Recycling-potential
	A1	A2	А3	A4	A5	В1	В2	В3	В4	В5	В6	В7	C1	C2	C3	C4	D
Declared	Х	Х	Х	Х	Х	ND	ND	ND	ND	ND	ND	ND	X	X	Х	Х	X
Geography	IT	EU	SE	SE	EU	-	-	-	-	-	-	-	SE	SE	SE	SE	SE
Specific data used	Factory supplied specific data for A1 - A3		-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Variation- Products	0 %			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation- Sites	0 %			-	-	-	-	-	-	-	-	-	-	-	-	-	-





#### **Content Information**

Product Components	Weight, kg	Post- consumer material, weight-%	Biogenic material, weight- % and kg C/kg
Metal	1.000	0.000	0.000
Total	1.000	0.000	0.000

Packaging Materials	Weight, kg	Weight- % (versus the product)	Weight biogenic carbon, kg C/kg
LDPE	0.000	0.046	0.000
Corrugated board	0.058	5.760	0.026
Total	0.058	5.806	0.026

Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight- % per functional or declared unit

At the date of issue of this declaration, there is no "Substance of Very High Concern" (SVHC) in concentration above 0.1% by weight, and neither does the packaging, following the European REACH regulation (Registration, Evaluation, Authorization and Restriction of Chemicals)





## **Environmental Information**

Potential environmental impact – indicators according to EN 15804+A2

Results per functional unit: 1 kg											
Indicator	Unit	A1 - A3	A4	A5*	C1	C2	C3	C4	D		
GWP-total	kg CO2 eq	4.27e+0	1.78e-2	9.39e-2	0.00e+0	7.14e-3	-9.97e-2	4.62e-3	-2.66e+0		
GWP-fossil	kg CO2 eq	4.27e+0	1.71e-2	ND	0.00e+0	6.84e-3	0.00e+0	4.68e-3	-2.66e+0		
GWP-biogenic	kg CO2 eq	4.85e-3	7.30e-4	9.39e-2	0.00e+0	2.92e-4	-9.97e-2	-5.79e-5	-5.40e-3		
GWP-luluc	kg CO2 eq	2.30e-3	4.72e-7	ND	0.00e+0	1.89e-7	0.00e+0	4.75e-6	-1.27e-3		
ODP	kg CFC-11 eq	2.24e-11	1.03e-15	ND	0.00e+0	4.13e-16	0.00e+0	7.71e-15	-1.45e-11		
AP	mole H+ eq	2.79e-2	1.47e-4	ND	0.00e+0	5.88e-5	0.00e+0	1.50e-5	-1.95e-2		
EP-freshwater	kg P eq	6.43e-6	2.20e-9	ND	0.00e+0	8.80e-10	0.00e+0	4.23e-9	-4.51e-6		
EP-marine	kg N eq	3.30e-3	7.32e-5	ND	0.00e+0	2.93e-5	0.00e+0	3.77e-6	-1.92e-3		
EP-terrestrial	mole N eq	3.64e-2	8.02e-4	ND	0.00e+0	3.21e-4	0.00e+0	4.14e-5	-2.13e-2		
POCP	kg NMVOC eq	1.01e-2	1.38e-4	ND	0.00e+0	5.53e-5	0.00e+0	1.18e-5	-6.03e-3		
ADP-minerals & metals	kg Sb eq	1.38e-4	1.14e-10	ND	0.00e+0	4.56e-11	0.00e+0	1.28e-10	-1.11e-4		
ADP-fossil	MJ	5.15e+1	2.46e-1	ND	0.00e+0	9.84e-2	0.00e+0	6.99e-2	-3.35e+1		
WDP	m3	9.14e-1	7.70e-5	ND	0.00e+0	3.08e-5	0.00e+0	-6.35e-5	-4.88e-1		
Acronyms	biogenic; GW potential of t EP-fresh compartme compartn Formation po	m3 9.14e-1 7.70e-5 ND 0.00e+0 3.08e-5 0.00e+0 -6.35e-5 -4.88e-1  GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption									

<sup>\*</sup> Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator. The module A5 is only partially declared, GWP biogenic arising due to packaging material in A1-A3 stages are balanced in A5, where it exits the product system boundary





## **Use of resources**

Results per functional unit: 1 kg								
Indicator	Unit	A1 - A3	A4	C1	C2	C3	C4	D
PERE	MJ	1.34e+1	1.35e-3	0.00e+0	5.41e-4	0.00e+0	6.28e-3	-8.51e+0
PERM	MJ	0.00e+0						
PERT	MJ	1.34e+1	1.35e-3	0.00e+0	5.41e-4	0.00e+0	6.28e-3	-8.51e+0
PENRE	MJ	5.15e+1	2.46e-1	0.00e+0	9.84e-2	0.00e+0	6.99e-2	-3.36e+1
PENRM	MJ	0.00e+0						
PENRT	MJ	5.16e+1	2.46e-1	0.00e+0	9.84e-2	0.00e+0	6.99e-2	-3.36e+1
SM	kg	7.78e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	-6.30e-1
RSF	MJ	0.00e+0						
NRSF	MJ	0.00e+0						
FW	m3	2.44e-2	2.06e-6	0.00e+0	8.24e-7	0.00e+0	7.87e-7	-1.36e-2
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water							

<sup>\*</sup> This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO2 is set to zero.





# **Additional voluntary indicators**

Results per functional unit: 1 kg								
Indicator	Unit	A1 - A3	A4	C1	C2	C3	C4	D
GWP-GHG	kg CO2 eq	4.24e+0	1.75e-2	0.00e+0	7.02e-3	0.00e+0	4.52e-3	-2.62e+0
EP	kg PO4 eq	5.50e-7	0.00e+0	0.00e+0	0.00e+0	0.00e+0	1.33e-6	0.00e+0
Acronyms	GWP-GHG global warming potential - greenhouse gases; EP eutrophication potential							

Additional voluntary indicators

This indicator supports comparability with EPDs based on the previous version of EN 15804 (EN 15804:2012+A1:2013).

## **Waste and output flows**

Results per functional unit: 1 kg								
Indicator	Unit	A1 - A3	A4	C1	C2	C3	C4	D
HWD	kg	-2.01e-10	6.12e-14	0.00e+0	2.45e-14	0.00e+0	5.77e-12	-1.81e-10
NHWD	kg	4.49e-1	9.34e-6	0.00e+0	3.74e-6	0.00e+0	1.00e-1	-3.60e-1
RWD	kg	1.20e-3	8.88e-8	0.00e+0	3.55e-8	0.00e+0	8.13e-7	-7.65e-4
Acronyms	HW Hazardous waste disposed; NHW Non-hazardous waste disposed; RW Radioactive waste disposed							





# **Output flows**

Results per functional unit: 1 kg								
Indicator	Unit	A1 - A3	A4	C1	C2	C3	C4	D
CRU	kg	0.00e+0						
MFR	kg	0.00e+0						
MER	kg	0.00e+0						
EEE	MJ	0.00e+0						
EET	MJ	0.00e+0						
Acronyms	CRU Components for reuse; MFR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy							





# **Product Table**

Name	Weight, kg	Unit
42X1.5MM PIPE 316L 3M STAINLESS STEEL A-PRESS	1.532	m
22X1.2MM PIPE 316L 3M STAINLESS STEEL A-PRESS	0.630	m
18X1.0MM PIPE 316L 6M STAINLESS STEEL A-PRESS	0.429	m
15X1.0MM PIPE 316L 6M STAINLESS STEEL A-PRESS	0.353	m
15X1.0MM PIPE 316L 3M STAINLESS STEEL A-PRESS	0.353	m
28X1.2MM PIPE 316L 3M STAINLESS STEEL A-PRESS	0.811	m
18X1.0MM PIPE 316L 3M STAINLESS STEEL A-PRESS	0.429	m
22X1.2MM PIPE 316L 6M STAINLESS STEEL A-PRESS	0.630	m
54X1.5MM PIPE 316L 3M STAINLESS STEEL A-PRESS	1.987	m
35X1.5MM PIPE 316L 3M STAINLESS STEEL A-PRESS	1.268	m
42X1.5MM PIPE 316L 6M STAINLESS STEEL A-PRESS	1.532	m
88,9x2.0MM PIPE 316L 6M STAINLESS STEEL A-PRESS	4.384	m
54X1.5MM PIPE 316L 6M STAINLESS STEEL A-PRESS	1.987	m
108x2.0MM PIPE 316L 6M STAINLESS STEEL A-PRESS	5.348	m
76,1x2.0MM PIPE 316L 6M STAINLESS STEEL A-PRESS	3.739	m
28X1.2MM PIPE 316L 6M STAINLESS STEEL A-PRESS	0.811	m
35X1.5MM PIPE 316L 6M STAINLESS STEEL A-PRESS	1.268	m





### **Additional information**

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins, and/or risks. It is advised not to use the results of modules A1-A3 (A1-A5 for services) without considering the results of module C.

The end-of-life reflects the Swedish market, where 1 % of ferrous metallic waste is landfilled, and 99 % recycled, a wastage of 10 % is considered during the recycling process. The other materials' EoL scenarios are as per SCB data for 2020. For the credit for recovered material (module D), EU datasets were used.

Data quality: All datasets used came from reputable databases Sphera Managed LCA Content (MLC) (fka GaBi database) and Ecoinvent, with good technological representativeness. Therefore, it could be considered good.

Allocation: No co-product allocation has been applied since no co-products are generated, and therefore allocation has not been relevant.

Cut-off Criteria: The general rules for the exclusion of inputs and outputs follow the requirements in EN15804+A2.

Revision information: The dataset for Stainless Steel was changed. GWP Biogenic throughout the product life cycle was balanced to add to zero in A5 for packaging material and C3 for product material, hence the change in impact values. The total change in GWP total for the product stage was reduced by 3 % compared to the previous version.





# References

EN 15804:2012+A2	Sustainability of construction works – Environmental product declaration – Core rules for the product category of construction products
EPD International (2021)	General Programme Instructions of the International EPD® System, version 4.0
PCR 2019:14	PCR 2019:14. v1.3.1. Construction products (EN 15804: A2)
SCB (2023)	https://www.statistikdatabasen.scb.se/pxweb/en/ssd/START_MI_MI0305/MI0305T003/table/tableViewLayout1/
ISO 14025:2006	International Standard ISO 14025 – Environmental labels and declarations – Type III environmental declarations – Principles and procedures
ISO 14040:2006	International Standard ISO 14040: Environmental Management – Life cycle assessment – Principles and framework. Second edition 2006-07-01.
ISO 14044:2006	International Standard ISO 14044: Environmental Management – Life cycle assessment – Requirements and Guidelines.





#### **Contact Info**

a-c

EPD owner:

JI AR

Ahlsell AB

Email: andrea.wastlund@ahlsell.se Telephone: +46 8 685 70 00

Adress: SE-117 98 Stockholm, Sweden

**Z** CARBONZERO

LCA author:

Carbonzero AB Email: info@eando.se

Telephone: +46 4 317 07 07

Adress: SE-262 32 Ängelholm, Sweden

Third party verifier: Vladimír Kocí

Email: vladimir.koci@lcastudio.cz Telephone: +420 608 055 972

Adress: LCA Studio, Šárecká 1962/5, 160 00 Praha 6

EPD.

Program operator:

EPD International AB
Email: info@environdec.com
Telephone: +46 (0)73 311 30 20
Adress: SE-11427 Stockholm, Sweden