

Environmental Product Declaration



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Fire impregnated Thermowood

from

Södra Wood A/S



Programme:	The International EPD® System, www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	S-P-11775
Publication date:	2023-12-18
Version date	2024-09-03 (Version 1.1)
Valid until:	2028-12-17

EPD of multiple products, based on the average results of the product group.



An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR)
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product Category Rules (PCR): <i>Construction products, 2019:14, Version 1.3.1 and c-PCR Wood and wood-based products for use in construction (EN 16485:2014)</i>
PCR review was conducted by: <i>The Technical Committee of the International EPD® System. Claudia A. Peña. Contact via info@environdec.com</i>
Life Cycle Assessment (LCA)
LCA accountability: <i>Fanni Végvári, CarbonZero AB</i>
Third-party verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:
<input checked="" type="checkbox"/> EPD verification by individual verifier
Third-party verifier: <i>Vladimír Kočí, LCA Studio, Czech Republic</i>  
Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier:
<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD:

Södra Wood A/S

Contact:

Rasmus Vadmand, rasmus.vadmand@sodra.com

Description of the organisation:

Södra Wood A/S is a timber import company with many years of experience who deliver to Scandinavian timber traders, the furniture industry and other wood-consuming industries.

Name and location of production site(s):

Rundhällen, Sweden

Västerås, Sweden

Koppom, Sweden

Product information

Product name(s):

Painted C260 fire impregnated ThermoWood® D212 and C260 fire impregnated ThermoWood® D212.

Product description:

100% PEFC-certified fire-impregnated cladding wood ThermoWood® D212 pine is impregnated with C260 Xterior, which is non-hygroscopic. It meets the requirements for use class NS EN 16755 for exterior use and fire properties such as Euroclass B or SP Fire 105. The fire-impregnation agent C260 Xterior is encapsulated by polymers, preventing it from being washed out. ThermoWood® D212 is heated to a minimum of 212°C, which drives out the nutrients that fungi and bacteria feed on. This significantly improves the biological durability. Additionally, the pH value is lowered, the equilibrium moisture content is reduced by approximately 50%, and the wood becomes up to 50% more dimensionally stable. The cladding wood is available in many different profiles and widths. It can also be supplied in custom sizes.

Geographical scope:

Sweden and Norway for suppliers and Denmark for distribution of final product.

LCA information

Functional unit / declared unit:

1 m³ of Thermowood with a density of 518 kg/m³.

Reference service life:

The Reference Service Life (RSL) is not relevant in this study.

Time representativeness:

The data is represented for the year of 2022.


Database(s) and LCA software used:

LCA for Experts (v.10.7.1.28) with an integrated Ecoinvent database v.3.8.

Description of system boundaries:

Cradle to grave and module D (A + B + C + D).

System diagram:

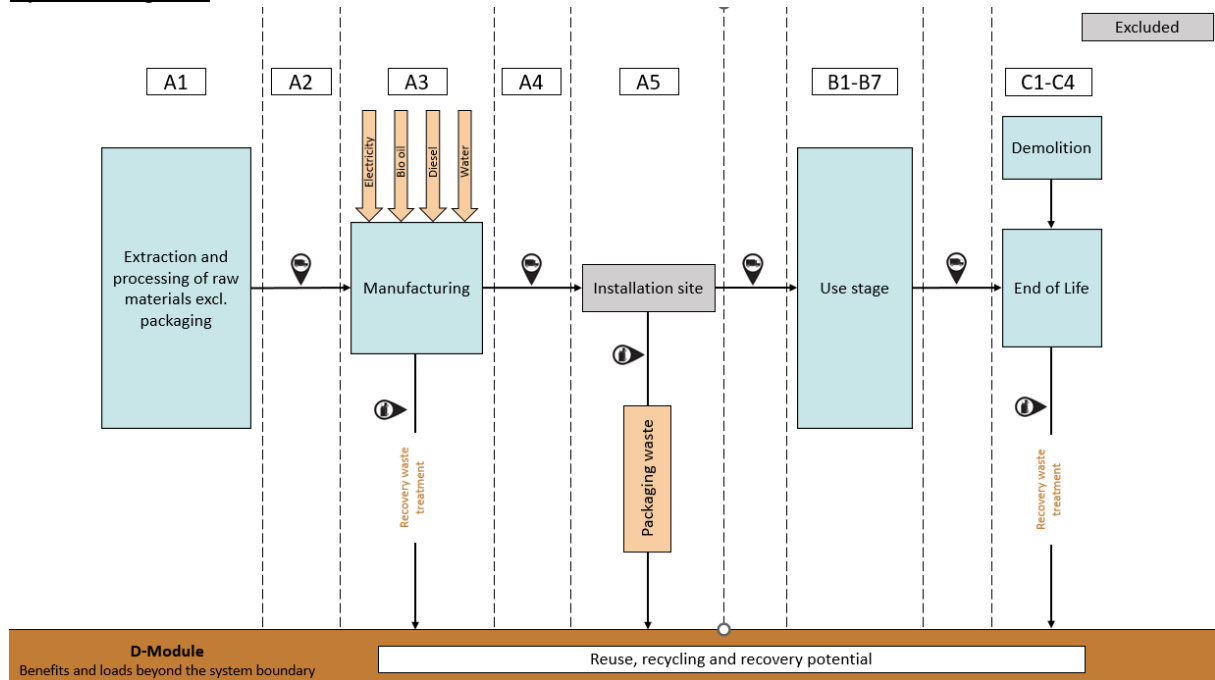

More information:

A1, raw material supply

This module considers the extraction and processing of all raw materials, energy, and transportation which occur upstream to the studied manufacturing process (except for ancillary material used in product manufacturing process).

A2, transport to the manufacturer

The raw materials are transported to the manufacturing site. This also includes additives and packaging.

A3, manufacturing

This module includes manufacturing of Thermowood, including packaging material.

A4, Transport

Transportation from manufacturing site to the construction site is taken into account, and is calculated based upon an average distance of 350 km.

A5, Construction installation

This stage includes any resources used during the installation of the product on the construction site. Treatment of the packaging waste on-site is considered.

B1-B7 Use phase

This stage includes no activities or emissions related to the product.

C1 Deconstruction/Demolition

This stage includes the de-construction and/or demolition of the Thermowood.

C2 Transport

Transport distance to waste processing.

C3 Waste processing

This stage includes any waste treatment needed.

C4 Final disposal

This includes any material that is landfilled.

D Benefits and loads beyond the system boundary

Emission credits are obtained from energy recovery and recycling of waste materials. In energy recovery, it is assumed that heat and electricity from waste incineration substitute thermal energy from natural gas and average Swedish electricity grid mix, respectively.

Omissions of life cycle stages

The following flows were excluded from the system boundary:

- A1-A3: The plants, production of machines and transportation systems are excluded since the related flows are supposed to be negligible compared to the potential environmental impacts through the life cycle of the product.

In addition, the following flows are excluded from the system boundaries:

- Flows related to human activities, such as employee transport.

Cut-off criteria

The following procedures were followed for the exclusion of inputs and output.

- All input and output flows in a unit process were considered i.e., taking into account the value of all flows in the unit process and the corresponding LCI where data was available.
- Data gaps were filled by conservative assumptions with average or generic data. Any assumptions in such cases were documented.
- The use of cut-off criterion on mass inputs and primary energy at the unit process level (1%) and at the information module level (5%).

All hazardous and toxic materials and substances are included in the inventory and the cut-off rules do not apply.

Allocation

Allocation criteria are based on mass allocation.

LCA: Scenarios and additional technical information

TRANSPORT FROM THE PRODUCTION PLACE TO THE USER (A4)

Transportation model

Transportation type	Capacity utilisation (incl. return) %	Type of vehicle	Distance (km)	Fuel/Energy consumption
Truck	61%	Average truck trailer with a 27 t payload	350	1,95 l/tkm diesel

Fuel type used

Fuel type	Database	Regional coverage	Time reference
EU 28: Diesel mix (6,35% bio-content)	Sphera	EU	2017

END OF LIFE (C2-C4)

Transport distance to waste processing (C2)

Transportation type	Capacity utilisation (incl. return) %	Type of vehicle	Distance (km)	Fuel/Energy consumption
Truck	61%	Average truck trailer with a 27 t payload	50	1,95 l/tkm

Waste treatment and disposal rates (C3-C4)

Packaging material	Recycling rate	Incineration rate	Landfill rate
Wood	67%	31%	2%

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
Modules declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	SE/ NO	SE/ NO	SE	SE/DK	DK	DK	DK	DK	DK	DK	DK	DK	DK	DK	DK	DK	DK	DK
Specific data used	81%			-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	4%			-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	<10%			-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Content information

The content information is declared for the worst-case product, painted fire impregnated Thermowood.

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Wood	518	0	221
Water content (19%)	98	0	0
Fire resistance	33	0	0
Paint	25	0	0
TOTAL	518	0	221
Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/ton
Plastic film	0,41	0,1	0
PET band	0,065	0,02	0
TOTAL	0,475	0,12	0

During the life cycle of the product no hazardous substance listed in the “Candidate List of Substances of Very High Concern (SVHC) for authorization” has been used in a percentage higher than 0,1% of the weight of the product.

Results of the environmental performance indicators

Mandatory impact category indicators according to EN 15804

Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq.	-6,11E+02	1,07E+01	1,10E+00	0,00E+00	2,59E-01	4,89E-02	7,85E+02	8,88E+00	-6,89E+02
GWP-fossil	kg CO ₂ eq.	1,69E+02	1,06E+01	1,10E+00	0,00E+00	2,57E-01	4,86E-02	3,59E+00	1,18E+00	-2,29E+02
GWP-biogenic	kg CO ₂ eq.	-7,89E+02	0,00E+00	5,38E-05	0,00E+00	0,00E+00	0,00E+00	7,81E+02	7,70E+00	-4,60E+02
GWP-luluc	kg CO ₂ eq.	9,12E+00	9,75E-02	-1,48E-05	0,00E+00	2,33E-03	2,94E-04	8,23E-04	1,19E-03	-4,85E-01
ODP	kg CFC 11 eq.	4,01E-08	1,01E-12	-6,00E-13	0,00E+00	3,28E-14	9,55E-14	2,10E-11	3,19E-13	-1,09E-09
AP	mol H ⁺ eq.	1,11E+00	1,99E-02	-1,54E-03	0,00E+00	1,32E-03	5,13E-04	3,47E-02	5,16E-03	-9,74E-01
EP-freshwater	kg P eq.	2,24E-02	3,85E-05	-8,18E-07	0,00E+00	9,22E-07	2,24E-07	5,93E-06	8,36E-06	-1,74E-03
EP-marine	kg N eq.	2,32E-01	8,24E-03	-2,67E-04	0,00E+00	6,18E-04	1,37E-04	9,96E-03	1,54E-03	-4,07E-01
EP-terrestrial	mol N eq.	2,88E+00	9,40E-02	-2,36E-03	0,00E+00	6,84E-03	1,50E-03	1,44E-01	1,66E-02	-4,35E+00
POCP	kg NMVOC eq.	9,45E-01	1,77E-02	-9,17E-04	0,00E+00	1,73E-03	3,70E-04	2,73E-02	6,42E-03	-1,10E+00
ADP-minerals&metals*	kg Sb eq.	1,40E-04	6,87E-07	-4,04E-08	0,00E+00	1,67E-08	4,99E-09	1,96E-07	9,68E-08	-2,31E-05
ADP-fossil*	MJ	2,66E+03	1,44E+02	-1,74E+01	0,00E+00	3,43E+00	1,11E+00	5,31E+01	1,71E+01	-4,64E+03

WDP*	m ³	9,10E+00	1,25E-01	-9,78E-02	0,00E+00	3,05E-03	4,54E-03	2,33E+01	3,13E-02	-5,53E+01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption									

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Additional mandatory and voluntary impact category indicators

Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
GWP-GHG ¹	kg CO ₂ eq.	6,45E+01	1,07E+01	4,66E-01	0,00E+00	2,60E-01	4,90E-02	3,60E+00	6,90E+00	-2,30E+02

Resource use indicators

Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
PERE	MJ	-8,92E+02	1,06E+01	-2,74E+00	0,00E+00	2,50E-01	5,13E-01	1,32E+01	1,06E+00	-1,03E+04
PERM	MJ	-7,87E+03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	-7,93E+03	1,06E+01	-2,74E+00	0,00E+00	2,50E-01	5,13E-01	1,32E+01	1,06E+00	-1,03E+04
PENRE	MJ	-2,59E+03	1,44E+02	-1,74E+01	0,00E+00	3,45E+00	1,11E+00	5,31E+01	1,71E+01	-4,62E+03

¹ This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.

PENRM	MJ	1,35E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	4,15E+01	1,44E+02	-1,74E+01	0,00E+00	3,45E+00	1,11E+00	5,31E+01	1,71E+01	-4,62E+03
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	1,85E+00	1,19E-02	-5,33E-03	0,00E+00	2,74E-04	7,31E-04	5,47E-01	8,47E-04	-1,96E+00
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water									

Waste indicators

Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Hazardous waste disposed	kg	4,60E-09	4,29E-10	1,12E-11	0,00E+00	1,07E-11	-9,96E-11	1,20E-09	5,42E-08	-4,49E-08
Non-hazardous waste disposed	kg	6,92E-01	2,13E-02	-4,27E-04	0,00E+00	5,25E-04	7,00E-04	4,16E+00	9,12E+00	-9,94E+00
Radioactive waste disposed	kg	6,59E-01	3,67E-04	-8,78E-04	0,00E+00	6,45E-06	1,83E-04	3,01E-03	1,22E-04	-9,47E-02


Output flow indicators

Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	5,30E-01	0,00E+00	1,24E-01	0,00E+00	0,00E+00	0,00E+00	5,63E+02	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-2,95E+02	1,79E+00	-2,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-5,31E+02	0,00E+00	-4,62E+00

Additional environmental information

Greenhouse gas emission from the use of electricity in the manufacturing phase.

Electricity mix	Value
Location	Sweden
Electricity mix	Bio: 10% Hydro: 65% Solar: 5% Wind: 20%
Reference year	2022

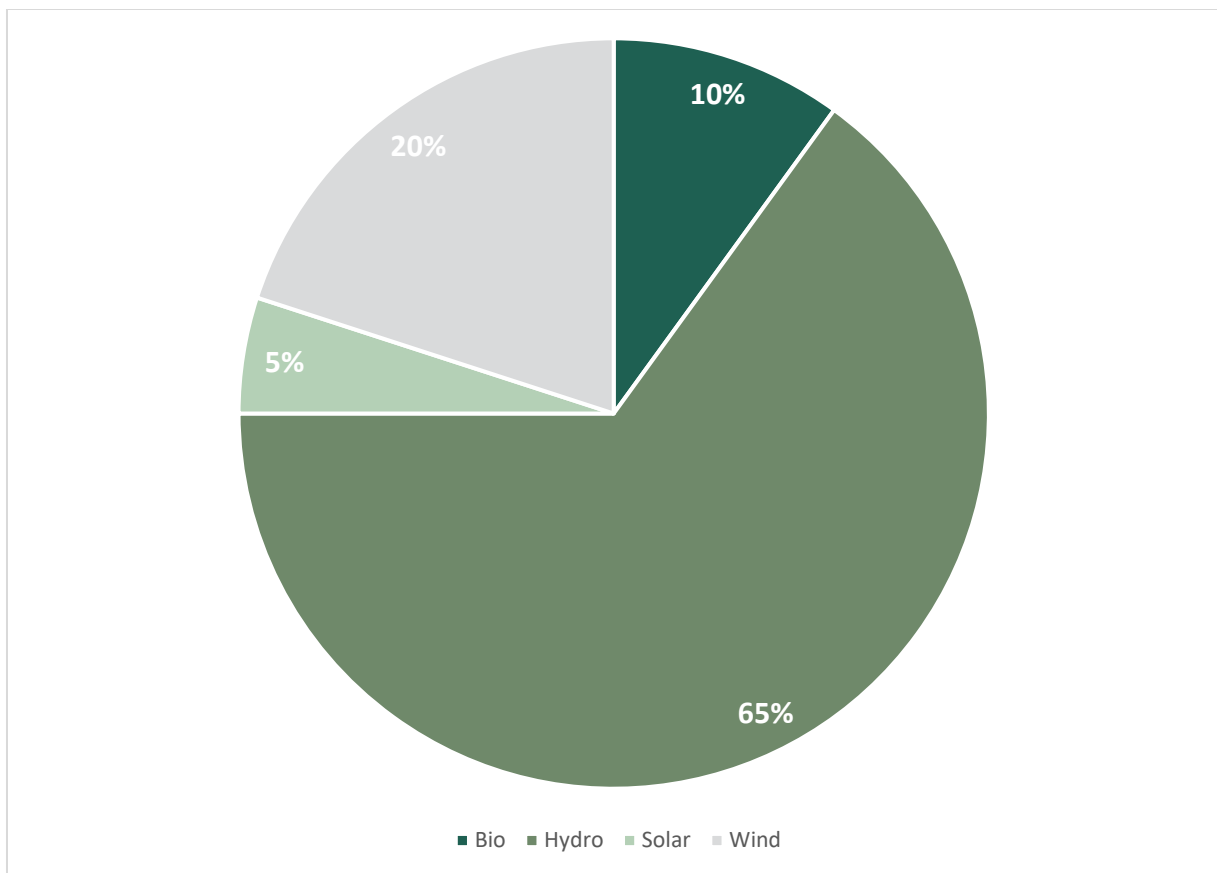

References

Association of Issuing Bodies. European Residual Mixes 2021. Version 1.0, 2022-05-31.
<https://www.aib-net.org/facts/european-residual-mix/2021>

EN 15804:2012+A2:2019- Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products

General Programme Instructions of the International EPD® System. Version 4.

ISO 14020:2000 Environmental labels and declarations — General principles

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines

NPCR 015 for wood and wood-based products

PCR 2019:14 Construction products and construction services. Version 1.3.1.

Statistics Denmark. 2020. Waste generation by industry, time, kind of treatment and waste category
<https://www.statbank.dk/statbank5a/SelectVarVal/saveselections.asp> (Retrieved 2023-11-27)

Differences Versus Previous Versions

2023-12-18 Version 1

2024-09-03 Version 1.1

Editorial change: *Updated the product name and description.*

Contact information

EPD owner:	 Södra Wood A/S Email: info.danmark@sodra.com Telephone: +45 48 48 82 00 Address: Frydenborgvej 27 N, 3400 Hillerød
LCA author:	 Fanni Végvári Email: fanni.vegvari@eando.se Telephone: +46 73 854 90 52 Address: Tåstrupsgatan 2, SE-262 32 Ängelholm, Sweden
Third party verifier:	 Vladimír Kocí Email: vladimir.koci@lcastudio.cz Telephone: +420 608 055 972 Address: LCA Studio , Šárecká 1962/5, 160 00 Praha 6
Program operator:	 EPD International AB info@environdec.com

