

Environmental Product Declaration

In accordance with ISO 14025 and EN
15804:2012+A2:2019 for:

Steel Structural Hollow Sections from Tata Steel Limited

Programme:	The International EPD® System, www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	S-P-05020
Publication date:	2022-09-14
Valid until:	2027-09-13

*An EPD should provide current information and may be updated if conditions change.
The stated validity is therefore subject to the continued registration and publication at
www.environdec.com*



Content

1.	Introduction	1
2.	General Information	2 - 3
3.	Process Description and System Boundaries	4 - 7
3.1	Product Identification and Usage	4
3.2	System boundary	5
3.3	Process Description	6 - 7
4.	Life Cycle Assessment	4 - 17
4.1	Information Sources and Data Quality	7
4.2	Methodological Details	8 - 9
4.3	Cut-off Criteria	10
4.4	System Boundaries	10
4.5	Software and Database	11
4.6	Comparability	11
4.7	Results	12 - 15
4.8	Interpretation	16
4.9	LCA Terminology	17
5.	Other Environmental Information	17
6.	References	17

1

Introduction



Tata Steel Limited, a flagship company of Tata Group is a multinational steel-making company headquartered in Mumbai (Maharashtra, India). The company is one of the world's most geographically diversified steel producing company. It was established in India as Asia's first integrated private steel company in 1907 and today the company, together with its subsidiaries, associates and joint ventures, has its presence across five continents with key operations in India, Netherlands and The United Kingdom. Tata Steel is among the top steel producing companies in the world with an annual crude steel capacity of 34 million tonnes per annum globally. The company is the second largest steel company in India and the company's largest steel plant is located in Jamshedpur, Jharkhand (India). The company's operations in India are fully integrated from mining to finished steel production and it also has captive iron ore and coal mines in India. Tata Steel group recorded a consolidated turnover of INR 1,56,294 crore in the financial year ending 31 March 2021.

Tata Steel - Tubes SBU is the outcome of the merger between Indian Tube Company with Tata Steel in 1985. Tubes SBU today is a leading manufacturer of welded pipes in the country having an installed capacity of over 1.1 Million tonne per annum. Currently, Tubes SBU manufactures Structural, Conveyance, Automotive and Boiler Tubes at its plant in Jamshedpur, Rhopoli and through some external processing agents (EPA).

Thinkstep Sustainability Solutions Pvt. Ltd, a Sphera Company (formerly thinkstep AG) has been entrusted to review the life cycle assessment study carried out by Tata Steel and to develop an Environmental Product Declaration document based on the Life Cycle Assessment study carried out by Tata Steel Limited as per ISO 14040/44. The LCA model was created using the GaBi ts Software system for life cycle engineering, developed by Sphera (formerly thinkstep AG).

2

General Information

2.1 EPD, PCR, LCA Information

Table 1 | EPD Information

Programme	The International EPD® System, Indian Regional Hub www.environdec.com, www.environdecindia.com
Program operator	EPD International AB Box 210 60, SE-100 31 Stockholm, Sweden.
Declaration holder	Amit Kumar Santra Head Business Development, Tata Structura Email ID : amit.santra@tatasteel.com Contact No. - 7763807278 General Office Tubes SBU Nimdih Road, Burma Mines Jamshedpur, Pin- 831007
Product	Steel Structural Hollow Sections
CPC Code	412 Products of iron or steel
EPD registration number	S-P-05020
Publication date	2022-09-14
Validity date	2027-09-13
Geographical scope	India
Reference standards	ISO 14020:2001, ISO 14025:2006, EN 15804:2012+A2:2019

Table 2 | PCR Information

Reference PCR	'Construction Products and Construction Services' 2019:14, Version 1.11
Date of Issue	2021-02-05 (Version 1.11) (VALID UNTIL: 2024-12-20)

Table 3 | Verification Information

Demonstration of verification	External, independent verification
Third party verifier	Mr. Sunil Kumar CS, Founder and Principal Consultant, Chakra4 Sustainability Consulting Services, Ivory 501, HM World City, 9th Phase, J P Nagar, Bengaluru 560 108, Email: sunilkumar@chakra4.in

Table 4 | LCA Information

Title	Environmental Product Declaration of Steel Structural Hollow Sections
Author	Dr. Rajesh Kumar Singh Thinkstep Sustainability Solutions Pvt. Ltd., a Sphera Company 707, Meadows, Sahar Plaza, Andheri Kurla Road, Andheri East, Mumbai, India - 400059 Email: rsingh@sphera.com 
Reference standards	ISO 14040/44 standard

2.2 Reference Period of EPD Data

The reference period for the primary data (foreground data) used within this EPD ranges between Financial Year 2021 (April 2020 to March 2021) to Financial Year 2022 (April 2021 to November 2021) based on the availability of data from various participating sites in this EPD. The background data used in the study has been applied through GaBi datasets which are less than 5 years old.

2.3 Geographical Scope of EPD Application

The geographical scope of this EPD is India.

2.4 Additional Information about EPD

This EPD provides information for the Steel Structural Hollow Sections Product manufactured by the Tubes division of Tata Steel Limited located in Jamshedpur (India) as well as by third party External Processing Agents (India) on behalf of the Tubes division. The EPD is in accordance with ISO 14025 and EN 15804+A2. EPD of construction products may not be comparable if they do not comply with EN 15804+A2. The Life Cycle Assessment (LCA) study carried out for developing this EPD for steel products is done as per ISO 14040 and ISO 14044 requirements.

Product Category Rules (PCR) for the assessment of the environmental performance of steel products is PCR for 'Construction Products and Construction Services' 2019:14, Version 1.11.

This PCR is applicable to the Steel Structural Hollow Sections Product complying with the standard EN 15804+A2 (Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products).

3

Product Description and System Boundaries

3.1 Product Identification and Usage

1. Product Description

Steel Structural hollow sections under the brand name Tata Structura cater to construction segment and for various aesthetic applications. Tubes SBU manufactures structural tubes under the brand name Tata Structura conforming to IS:4923 and IS:1161 for Square/Rectangular and Circular Hollow sections respectively. Tata Structura, Steel structural Hollow sections are superior in quality and are manufactured using best grade raw materials (Hot Rolled Coils) from Tata Steel's world-class Hot Strip Mill. Tata Structura is available with a yield strength ranging from 210 to 410 MPa. Tata Structura YSt 355 comes with yield strength of 355MPa and UTS of 490 MPa, providing better strength to weight ratio and sectional properties.

Diameter

Diameter/ Size range for Tata Structura description - Tata Structura can be manufactured up to a maximum

size of 400x400 mm for square sections, 400X200 mm for rectangular sections and 610 mm OD for circular sections. The thickness can vary from 1.8 to 18 mm.

2. Grade

Different grades available for Tata Structura.: IS1161/IS 4923, YSt210/240/310/355/410

3. Application of the product

It is a very versatile product and finds application across construction segments - (e.g.) infrastructure projects like airports, railways & metro stations, housing & commercial, large stadiums & sports arenas, industrial sheds & warehouses, and aesthetic sculptures.

Above product do not contain any substances that can be included in "Candidate List of Substances of Very High Concern for Authorization".



Fig. 1: Tata Structura application in airport

3.2 System boundary

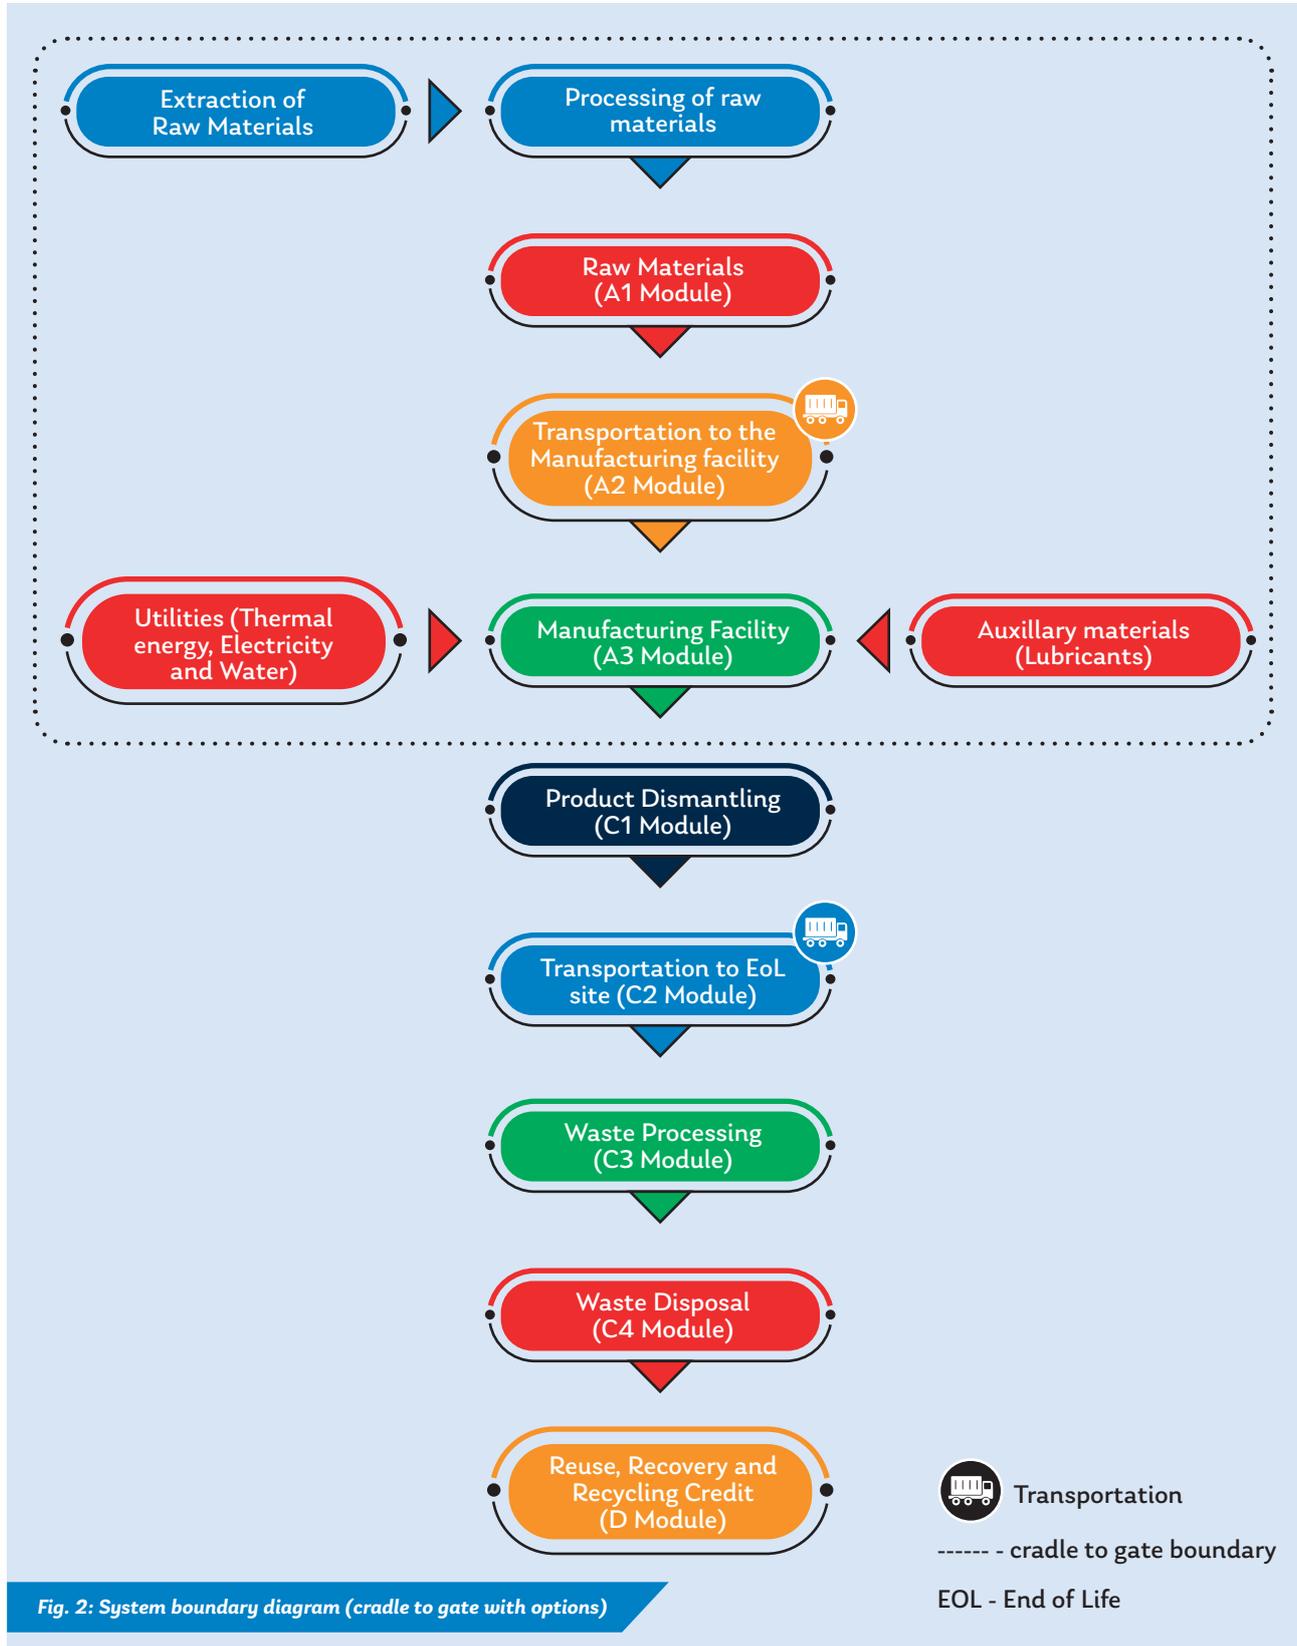


Fig. 2: System boundary diagram (cradle to gate with options)

3.3 Process Description

Tata Steel was established in India as Asia's first integrated private steel company in 1907 and has started its operation at Jamshedpur steel works facility in 1911. The technology used for steel structural hollow section produced represents 100% Blast Furnace (BF) with Basic Oxygen Furnace (BOF) route comprising older to modern technology which produces the raw material Steel Hot Rolled Coil which is further processed to produce the final product steel structural hollow sections. Hot rolled coils produced in Hot Strip Mills (HSM) and in Thin Slab Caster is the key raw material for Structura and hot rolled steel coil is produced by rolling cast steel from caster which takes liquid steel produced from basic oxygen furnace as its raw material. Liquid steel is produced from hot metal in basic oxygen furnace and hot metal is produced in blast furnace. The tube making process begins with the

uncoiling, levelling, and slitting of the hot rolled coil, which is then passed through a series of shaped rolls that gradually form the flat strip into a circular hollow section. The two strip edges, now adjacent to one another, are welded using a high frequency induction process. A further set of rolls effect the final shaping and sizing operation of the cold formed hollow section, and after trimming of the external weld bead and non-destructive testing, the tubes are cut to length prior to despatch or hot finishing. An overview of the process from hot rolled coil to cold formed steel structural hollow section is shown in the system boundary. Hot rolled coils produced in LD2 HSM, LD3 TSCR in Tata Steel Jamshedpur steel works and the hot rolled coils produced in HSM in Tata Steel Kalinganagar steel works are used for making structural sections.

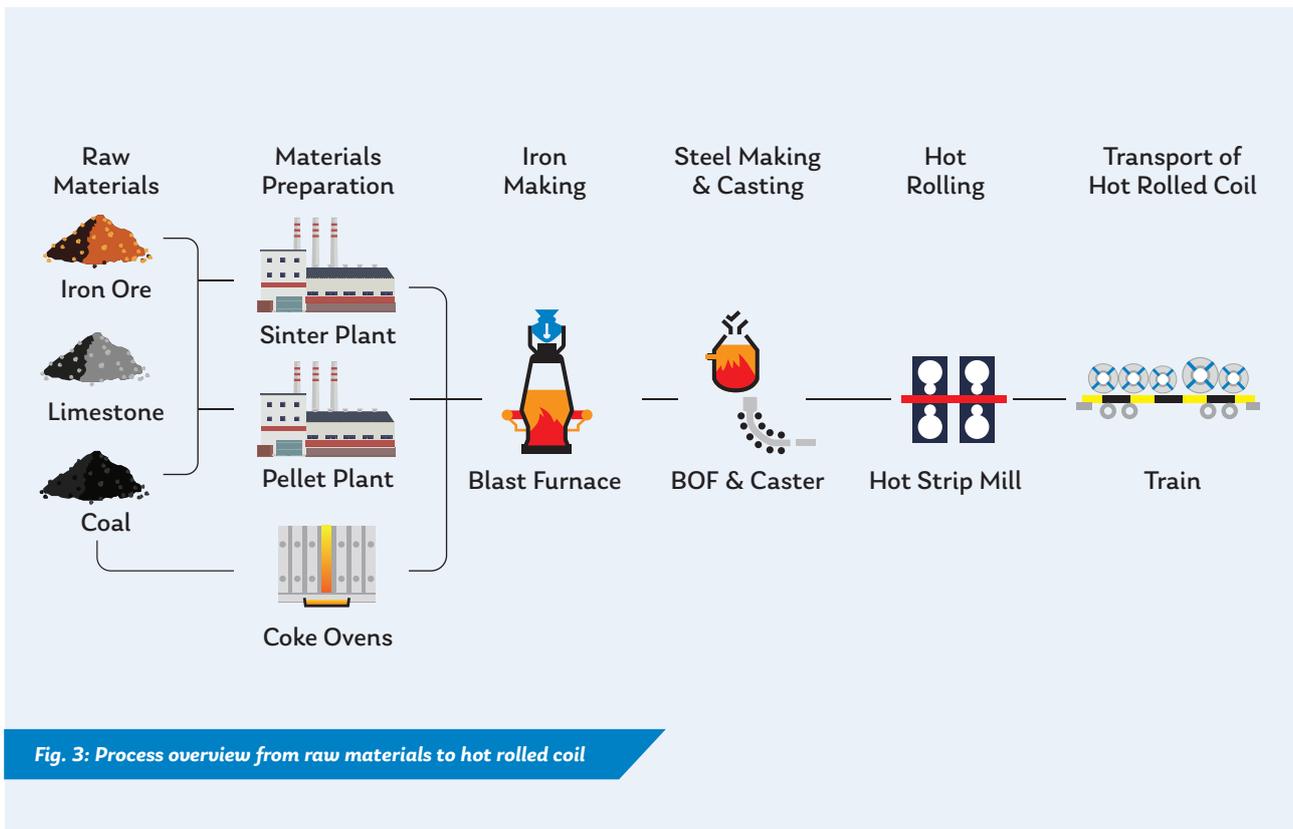


Fig. 3: Process overview from raw materials to hot rolled coil

3.3 Process Description

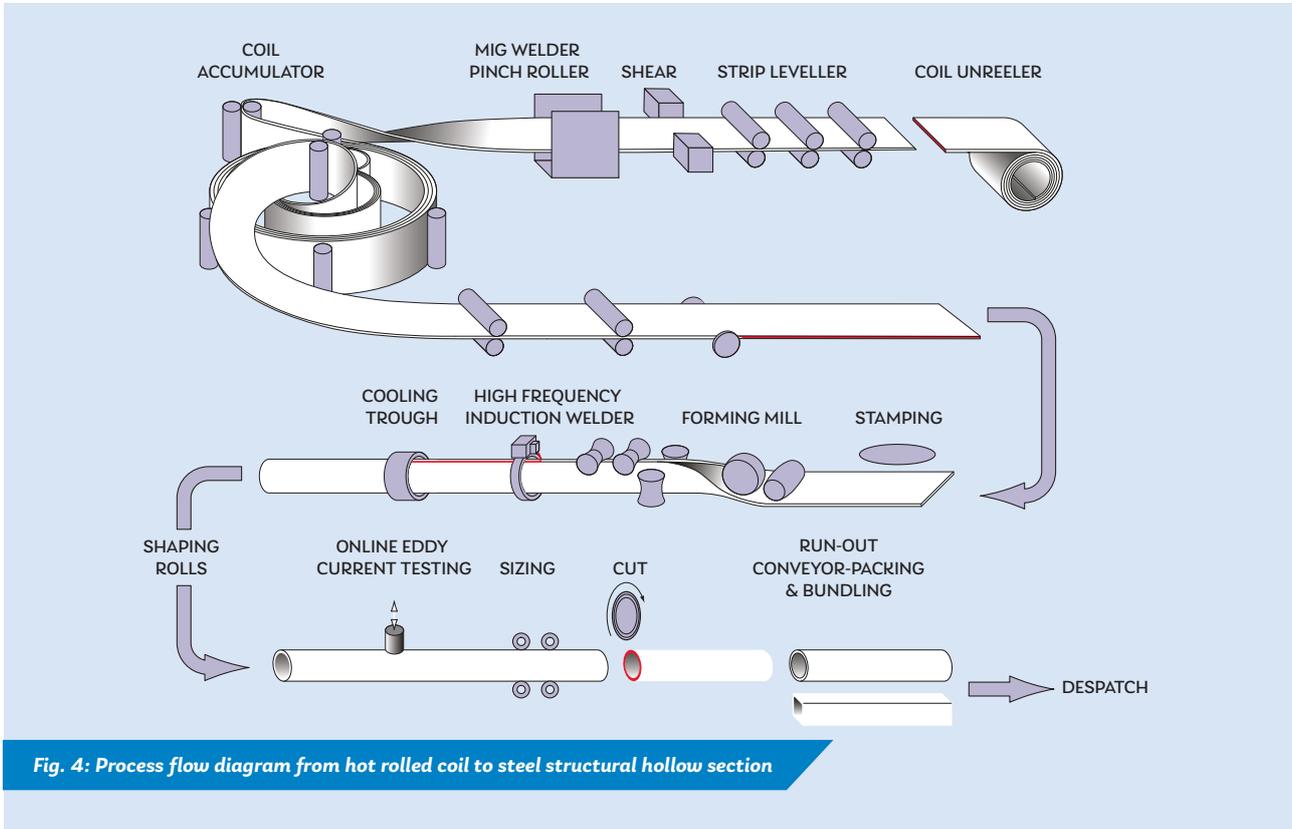


Fig. 4: Process flow diagram from hot rolled coil to steel structural hollow section

4

Life Cycle Assessment

4.1 Information Sources and Data Quality

It is important that data quality is in accordance with the requirements of the LCA's goal and scope. This is essential to the reliability of LCA and achievement of the intended application. The quality of the LCI data for modelling the life cycle stages has been assessed according to ISO 14040:2006. Data quality is judged by its precision (measured, calculated or estimated), completeness (e.g. are there unreported emissions?), consistency (degree of uniformity of the

methodology applied on an LCA serving as a data source) and representativeness (geographical, time period, technology). Primary data collected using data collection questionnaires was used for the study and for upstream processes GaBi 9.2.1.68 professional database 2020 was used.

4.2 Methodological Details

4.2.1 Co-Product Allocation

With any multi-product system, allocation rules are defined to relate the system inputs and outputs to each of the products. Several methods are documented in ISO 14040:2006 and ISO Technical Report 14049.

4.2.2 End-of-life phase

Steel is completely recyclable. Therefore, it is important to consider recycling in LCA studies involving steel, namely the steel scrap that is recycled from a final product at the end of its life. In addition, steel is a vital input to the steelmaking process, and this input of steel scrap should also be considered in LCA studies. Accounting for all these, the End-of -life credit for recycling is applied over 85% of steel (850 kg in 1

tonne of steel products). The landfill is considered as 15% of steel (150 kg in 1 tonne of steel products).

4.2.3 Declared unit

The declared unit for the EPD is 1 tonne of Steel Structural Hollow Sections manufactured at Tata Steel Ltd in its own facility as well as through external processing agency in India.

4.2.4 Selection of application of LCIA categories

A list of relevant impact categories and category indicators is defined and associated with the inventory data. The environmental impact per declared unit for the following environmental impact categories were reported in the EPD according with EN15804+A2:2019 (Table 7), and divided into core, upstream (and downstream, if included) module.

Table 5 | Environmental impacts indicators for EN15804+A2:2019

Impact category	Indicator	Unit
Climate change - total	Global Warming Potential total (GWP-total)	kg CO ₂ eq.
Climate change - fossil	Global Warming Potential fossil fuels (GWP-fossil)	kg CO ₂ eq.
Climate change - biogenic	Global Warming Potential biogenic (GWP-biogenic)	kg CO ₂ eq.
Climate change - luluc	Global Warming Potential land use and land use change (GWP-luluc)	kg CO ₂ eq.
Ozone Depletion	Depletion potential of the stratospheric ozone layer (ODP)	kg CFC-11 eq.
Acidification	Acidification potential, Accumulated Exceedance (AP)	Mole of H ⁺ eq.
Eutrophication aquatic freshwater	Eutrophication potential, fraction of nutrients reaching freshwater end compartment (EP-freshwater)	kg PO ₄ eq.
Eutrophication aquatic marine	Eutrophication potential, fraction of nutrients reaching marine end compartment (EP-marine)	kg N eq.
Eutrophication terrestrial	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	Mole of N eq.
Photochemical ozone formation	Formation potential of tropospheric ozone (POCP)	kg NMVOC eq.
Depletion of abiotic resources - minerals and metals	Abiotic depletion potential for non-fossil resources (ADP- minerals & metals)	kg Sb eq.
Depletion of abiotic resources - fossil fuels	Abiotic depletion for fossil resources potential (ADP-fossil)	MJ
Water use	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	m ³ world eq.

*World Steel Methodology Report, 2020

The consumption of natural resources per declared or function unit is reported in the EPD. Input parameters, according with EN15804+A2, describing resource use are shown in Table 6.

Table 6 | Natural resources use parameters

Parameter	Unit
Renewable primary energy as energy carrier (PERE)	MJ
Renewable primary energy resources as material utilization (PERM)	MJ
Total use of renewable primary energy resources (PERT)	MJ
Non-renewable primary energy as energy carrier (PENRE)	MJ
Non-renewable primary energy as material utilization (PENRM)	MJ
Total use of non-renewable primary energy resources (PENRT)	MJ
Use of secondary material (SM)	kg
Use of renewable secondary fuels (RSF)	MJ
Use of non-renewable secondary fuels (NRSF)	MJ
Net freshwater Use (FW)	m ³

Table 7 | Output flows and waste categories parameters

Parameter	Unit
Hazardous waste disposed (HWD)	kg
Non-hazardous waste disposed (NHWD)	kg
Radioactive waste disposed (RWD)	kg
Components for re-use (CRU)	kg
Materials for recycling (MFR)	kg
Materials for energy recovery (MER)	kg
Exported electrical energy (EEE)	MJ
Exported thermal energy (EET)	MJ

Table 8 | Additional parameters

Impact category	Indicator	Unit
Particulate matter emissions	Potential incidence of disease due to PM emissions (PM)	Disease incidences
Ionising radiation	Potential Human exposure efficiency relative to U235 (IRP)	kBq U235 eq.
Eco-toxicity (freshwater)	Potential Comparative Toxic Unit for ecosystems (ETP - fw)	CTUe
Human toxicity, cancer effects	Potential Comparative Toxic Unit for humans (HTP - c)	CTUh
Human toxicity, non-cancer effects	Potential Comparative Toxic Unit for humans (HTP - nc)	CTUh
Land use related impacts/ Soil quality potential	Potential soil quality index (SQP)	Pt

4.3 Cut-off Criteria

Criteria were set out in the original study for the recording of material flows and to avoid the need to pursue trivial inputs/outputs in the system. These are outlined below:

1. All energetic inputs to the process stages were recorded, including fuels, electricity, steam, and compressed air.
2. Each excluded material flow must not exceed 1% of mass, energy, or environmental relevance, for each unit process. Accordingly, 99% of the material flow were accounted.
3. The sum of the excluded material flows in the system must not exceed 5% of mass, energy, or environmental relevance and it has been complied.

4.4 System Boundaries

The study is a cradle-to-gate with additional modules LCA study. It covers the stages from production of raw materials to the End of Life of the product, excluding the use phase of the product. The scope covers raw material production (A1), inbound transportation (A2), manufacturing (A3), product dismantling (C1), transport of dismantled product to EoL site (C2), waste processing (C3), disposal (C4) as well as the end of life stage recycling (D) considerations. The scenarios included are currently in use and are representatives for one of the most likely scenario alternatives.

Table 9 | Details of system boundary included in the study

EPD Module	Life Cycle Stages	Life Cycle Sub-Stages	Definitions
A1	Materials	Primary raw materials Production	This module covers extraction and production of the raw materials. In this study, Hot rolled Steel Coil is the raw material for the manufacturing of Steel Structural hollow section and hence the production of Hot rolled coil and its upstream is included in this module.
A2	Upstream Transport	-	Transport raw materials to the manufacturing unit.
A3	Manufacturing materials	Utilities and packaging products	Manufacturing of steel structural hollow section products.
C1	Product Dismantling	-	Dismantling of the steel Structural Hollow Sections product.
C2	Transport to EoL site	-	Transport of the dismantled product to the EoL site.
C3	Waste Processing	-	Waste processing of the dismantled product (85% steel recycling).
C4	Disposal	-	Disposal of the dismantled products (i.e. landfill) 15% of steel product is sent to landfill.
D	EoL Credit	-	Steel is a 100% recyclable material and as per World Steel Data 85% recoverability is observed. Thus 85% is considered for EoL credit.

4.4.1 Geographic System Boundaries

The geographical coverage of this study covers the production of steel structural hollow section products of Tubes Division of Tata Steel Ltd in Jamshedpur as well as by third party external processing agencies in India who produces on behalf of Tata Steel Ltd. Indian specific datasets wherever possible have been adapted and others dataset were chosen from EU if no Indian datasets were available. In addition, imported raw materials are considered along with transport. All the primary data has been collected from Tata Steel Limited in co-operation with experts from Sphera (formerly Thinkstep AG).

4.4.2 Temporal System Boundaries

The data collection is related to one year of production except for two of the production units for which the data period were limited to only six months due to non-availability of data, The data was derived between Apr'2020 to Mar'2021. It is believed to be representative of steel production during this time frame.

4.4.3 Technology coverage

In the present study, hot rolled steel coil is the major raw material in the production of the steel Structural Hollow Sections.

4.5 Software and database

The LCA model was created using the GaBi 9.2.1.68 Software system for life cycle engineering, developed by Sphera Solutions Inc. The GaBi database provides the life cycle inventory data for several of the raw and process materials obtained from the upstream system. Detailed database documentation for GaBi datasets can be accessed at:

<https://gabi.sphera.com/international/support/gabi/gabi-database-2021-lci-documentation%20/>.

4.6 Comparability

According to the standards, EPDs do not compare the environmental performance of products in the sector. Any comparison of the declared environmental performance of products lies outside the scope of these standards and is suggested to be feasible only if all compared declarations follow equal standard provisions.

4.7 Results

Modules of the life cycle included as per PCR is given in Table 10.

Table 10 | Modules of the production life cycle included (X = declared module; MNA = module not applicable)

Production			Installation		Use stage							End-of-Life				Credits & charges outside system boundary
Raw material supply	Transport to manufacturer	Manufacturing	Transport to building site	Installation into building	Use / application	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction / demolition	Transport to EoL	Waste processing for reuse, recovery, recycle	Disposal	Reuse, recovery, or recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	X	X	X	X	X

4.7.1 LCIA results for 1 tonne of Steel Structural Hollow Sections

The LCIA results for 1 tonne of Steel Structural Hollow Sections is given in Table 11 to Table 15. The estimated results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

Parameter	Unit	A1	A2	A3	C1	C2	C3	C4	D
GWP - total	kg CO ₂ eq.	3.00E+03	3.26E+01	2.57E+01	6.10E-03	4.08E+00	0.00E+0	7.18E+00	-1.48E+03
GWP - fossil	kg CO ₂ eq.	3.00E+03	3.26E+01	2.57E+01	6.11E-03	4.08E+00	0.00E+0	7.40E+00	-1.48E+03
GWP - biogenic	kg CO ₂ eq.	-4.06E-01	-6.68E-03	-9.38E-02	-3.80E-06	-8.38E-04	0.00E+0	-2.20E-01	-2.12E+00
GWP - luluc	kg CO ₂ eq.	5.52E-01	1.68E-03	1.31E-01	3.16E-07	2.11E-04	0.00E+0	7.20E-03	4.22E-02
ODP	kg CFC-11 eq.	4.49E-09	1.61E-15	3.27E-13	3.03E-19	2.02E-16	0.00E+0	1.64E-14	3.23E-12
AP	Mole of H ⁺ eq.	6.93E+00	2.02E-01	8.59E-01	7.26E-06	3.47E-02	0.00E+0	2.38E-02	-3.30E+00
EP - freshwater	kg P eq.	4.16E-04	6.85E-06	2.48E-05	1.29E-09	8.59E-07	0.00E+0	5.67E-06	-8.38E-04
EP - marine	kg N eq.	1.28E+00	8.62E-02	7.70E-02	8.39E-07	1.57E-02	0.00E+0	5.78E-03	-6.01E-01
EP - terrestrial	Mole of N eq.	1.40E+01	9.47E-01	8.64E-01	9.27E-06	1.72E-01	0.00E+0	6.34E-02	-6.09E+00
POCP	kg NMVOC eq.	3.73E+00	1.71E-01	2.18E-01	3.84E-06	2.99E-02	0.00E+0	1.83E-02	-2.48E+00
ADPE	kg Sb eq.	3.50E-02	3.36E-07	-8.66E-04	6.33E-11	4.22E-08	0.00E+0	5.00E-07	-2.40E-02
ADPF	MJ	2.84E+04	4.32E+02	2.87E+02	8.14E-02	5.43E+01	0.00E+0	1.06E+02	-1.27E+04
WDP	m ³ world equiv.	1.96E+02	1.00E-01	1.15E+01	1.88E-05	1.26E-02	0.00E+0	-7.97E-02	-1.12E+02

GWP - total = global warming potential; GWP - fossil = global warming potential (fossil fuel only); GWP - biogenic = global warming potential (biogenic); GWP - luluc = global warming potential (land use only); ODP = ozone depletion; AP = acidification terrestrial and freshwater; EP - freshwater = eutrophication potential (freshwater); EP - marine = eutrophication potential (marine); EP - terrestrial = eutrophication potential (terrestrial); POCP = photochemical ozone formation; ADPE = abiotic depletion potential (element), ADPF = abiotic depletion potential (fossil) WDP = water scarcity.

Table 12 | Resource use for 1 tonne of Steel Structural Hollow Sections

Parameter	Unit	A1	A2	A3	C1	C2	C3	C4	D
PERE	MJ	5.63E+02	1.54E+00	1.41E+02	2.91E-04	1.94E-01	0.00E+0	7.41E+00	9.87E+02
PERM	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PERT	MJ	5.63E+02	1.54E+00	1.41E+02	2.91E-04	1.94E-01	0.00E+0	7.41E+00	9.87E+02
PENRE	MJ	2.84E+04	4.32E+02	2.87E+02	8.14E-02	5.43E+01	0.00E+0	1.06E+02	-1.27E+04
PENRM	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PENRT	MJ	2.84E+04	4.32E+02	2.87E+02	8.14E-02	5.43E+01	0.00E+0	1.06E+02	-1.27E+04
SM	kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
RSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	m3	4.76E+00	3.43E-03	3.47E-01	6.46E-07	4.31E-04	0.00E+0	1.41E-03	-2.61E+00

PERE = Use of renewable primary energy excluding the renewable primary energy resource used as raw materials; PERM = Use of renewable primary energy as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding the non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

Table 13 | Output flows and waste categories for 1 tonne of Steel Structural Hollow Sections

Parameter	Unit	A1	A2	A3	C1	C2	C3	C4	D
HWD	kg	4.40E-05	2.31E-08	-5.85E-05	4.34E-12	2.89E-09	0.00E+0	4.80E-07	-0.00163
NHWD	kg	4.01E+00	5.39E-03	5.75E+00	1.01E-06	6.77E-04	0.00E+0	1.50E+02	1.52E+02
RWD	kg	8.21E-02	8.98E-05	7.56E-03	1.69E-08	1.13E-05	0.00E+0	1.25E-03	4.53E-04
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.50E+02	0.00E+00	0.00E+00
MER	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

Table 14 | Biogenic carbon content of product and packaging for 1 tonne of Steel Structural Hollow Sections

Parameter	A1	A2	A3	C1	C2	C3	C4	D
Biog. C in product [kg]	0.00E+00							
Biog. C in packaging [kg]	0.00E+00							

Biog. C in packaging = Biogenic carbon content in packaging; Biog. C in product = Biogenic carbon content in product

Table 15 | Additional Environmental parameters for 1 tonne of Steel Structural Hollow Sections

Parameter	Unit	A1	A2	A3	C1	C2	C3	C4	D
PM	Disease incidences	8.76E-05	8.79E-07	1.32E-05	6.14E-11	2.23E-07	0.00E+0	2.56E-07	-4.96E-05
IR	kBq U235 eq.	7.80E+00	8.54E-03	1.70E+00	1.61E-06	1.07E-03	0.00E+0	1.78E-01	2.74E+01
ETF-fw	CTUe	2.93E+03	1.49E+02	1.42E+02	2.80E-02	1.87E+01	0.00E+0	3.15E+01	-7.55E+01
HTP-c	CTUh	6.60E-08	2.53E-09	2.69E-08	4.74E-13	3.21E-10	0.00E+0	3.62E-09	4.54E-07
HTP-nc	CTUh	5.40E-06	1.08E-07	2.66E-08	1.52E-11	1.55E-08	0.00E+0	3.64E-07	-1.53E-05
SQP	Pt	9.31E+02	1.86E+00	1.67E+02	3.51E-04	2.34E-01	0.00E+0	8.02E+00	3.43E+02

PM = Particulate matter emissions; IR = Ionising radiation, human health; ETF= Eco-toxicity (freshwater); HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Soil quality potential/Land use related impacts

4.8 Interpretation

Modules of the life cycle included as per PCR is given in Table 10.

Table 16 | Interpretation of most significant contributors to life cycle parameters (Steel Structural Hollow Sections)

Parameter	Most significant contributor
Abiotic Depletion Potential (ADP) -Elements	 The total cradle to gate impact is 3.41E-02 kg Sb eq. A total credit of 2.40E-02 kg Sb eq is taken in module D.
Acidification Potential (AP)	 The total cradle to gate impact is 7.99E+00 Mole of H+ eq. In A1 – A3, the raw materials (86.7%) followed by electricity (10.13%) and in-bound transportation (2.5%) has the highest impacts. A total credit of 3.30E+00 Mole of H+ eq is taken in module D.
Eutrophication Potential (EP)	 The total cradle to gate impact is 4.48E-04 kg P eq. In A1- A3, the raw materials (92.9%) has the highest impact. A total credit of 8.38E-04 kg P eq is taken in module D.
Global Warming Potential (GWP 100 years)	 The total cradle to gate impact is 3.06E+03 kg CO2 eq. In A1 – A3, the raw materials (98%) has the highest impacts. A total credit of 1.48E+03 kg CO2 eq is taken in the module D.
Ozone Layer Depletion Potential (ODP, steady state)	 The total cradle to gate impact is 4.49E-09 kg CFC eq. In module A1 – A3, the impacts are due to the raw materials (99.99%). A total credit of 3.23E-12 kg CFC-11 eq is taken in module D.
Photochemical Ozone Creation Potential (POCP)	 The total cradle to gate impact is 4.12E+00 kg NMVOC eq. In A1 – A3, the raw materials (90.5%) followed by electricity (6.79%) and inbound transportation (4.13%) has the highest impacts. A total credit of 2.48E+00 kg NMVOC eq is taken in module D.
Abiotic depletion potential (ADP) - Fossil	 The total cradle to gate impact is 2.91E+04 MJ. In A1 – A3, the raw materials (97.52%) has the highest impacts. A total credit of 1.27E+04 MJ is taken in module D.

Concluding, the study provides fair understanding of environmental impacts during the various life cycle stages of steel structural hollow section production. It also identifies the hot spots in the value chain where improvement activities can be prioritised and accordingly investment can be planned. The scope

covers the ecological information to be divided into raw material production (A1), transportation (A2), manufacturing (A3), product dismantling (C1), transport of dismantled product to EoL site (C2), waste processing (C3), waste disposal (C4) as well as the end of life stage recycling (D) considerations.

4.9 LCA Terminology

Cradle to Gate	Scope of study extends from mining of natural resources to the completed product ready for shipping from the manufacturing dispatch “gate”, known as Modules A1-A3.
Cradle to Grave	Scope of study extends from mining of natural resources to manufacture, use and disposal of products at End of Life, including all Modules A-D.
End of life	Post-use phase life cycle stages involving collection and processing of materials (e.g. scrap) and recycling or disposal, known as Modules C and D.

5

Other Environmental Information

The constituent materials used within our products are responsibly sourced and we apply the principles of Sustainable Development and of Environmental Stewardship as a standard business practice in our operations. Protecting the environment by preserving

non-renewable natural resources, increasing energy efficiency, reducing the environmental emissions, limiting the impact of materials transportation to and from our operations is part of our way in doing business.

6

References

- EN 15804: 2012+A2:2019, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
- GaBi 10 2021: Dokumentation der GaBi-Datensätze der Datenbank zur Ganzheitlichen Bilanzierung. LBP, Universität Stuttgart und PE International, 2012
- GaBi 10 2021: Software und Datenbank zur Ganzheitlichen Bilanzierung. LBP, Universität Stuttgart und PE International, 2012
- ISO 14020:2000 Environmental labels and declarations - General principles
- ISO 14025:2006 Environmental labels and declarations - Type III environmental declarations - Principles and procedures
- ISO 14040:2006 Environmental management- Life cycle assessment - Principles and framework
- ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.
- ISO/TR 14049:2012 Environmental management – Life cycle assessment – Illustrative examples on how to apply ISO 14044 to goal and scope definition and inventory analysis.
- WSI and Eurofer’s Co-product Allocation Methodology 2014 - A methodology to determine the LCI of Steel industry Co-products.
- World Steel Association - CO₂ Data Collection User Guide, Version 9 (May 2019)