

Environmental Product Declaration



 **Design**flooring

DESIGNFLOORING LOOSELAY
POLYVINYL CHLORIDE
FLOOR COVERING

In accordance with ISO 14025 and EN 15804

Contents

1. General information	2
2. Product	3
3. LCA: Calculation rules	8
4. LCA: Scenario and additional technical information	10
5. LCA: Results	11
6. Life cycle interpretation	14
References	14

1. General information

EPD Program holder	The International EPD System www.environded.com Valhallavagen 81, 11427 Stockholm, Sweden	
Product Category Rules (PCR)	PCR 2012:01 version 2, Construction products and construction services – 2015-03-03 EN 15804:2012+A1:2013- Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products	
Generic PCR review conducted by	Technical committee of the International EPD System	
Independant Verification	internal ✓ external	
Approved and verified by	Jane Anderson (Principal Consultant, Thinkstep) Email: jane.anderson@thinkstep.com	
EPD prepared by	VFCONSULTANT – Dr Valery Fauchet Email: vfconsultant@sfr.fr www.vfconsultant.fr	
Owner of the declaration	Company Name: Designflooring International Crab Apple Way, Vale Park, Evesham Worcestershire, WR11 1GP United Kingdom Phone: +44 (0)1386 820105 Email: michael.cheetham@designflooring.com Website: www.designflooring.com	
Registration Numbers	S-P-00878	
Issue date: 2016-04-14	Valid to: 2021-01-11	


2. Product

2.1 Product description

This declaration is for Designflooring LooseLay floor covering product for the European market.

Designflooring LooseLay flooring is used in both commercial and residential interiors. It is available in 4.5 mm thickness. The wear layer is 0.5 mm thick. The weight of the product is 7.472 kg/m². The product is available in plank and tile. Decorative applications and a transparent PVC wear layer are applied to the surface and a lacquer is used as a finish on the wear layer.

The UN CPC classification code is 36910 Floor coverings of plastics, in rolls or in the form of tiles; wall or ceiling coverings of plastics.

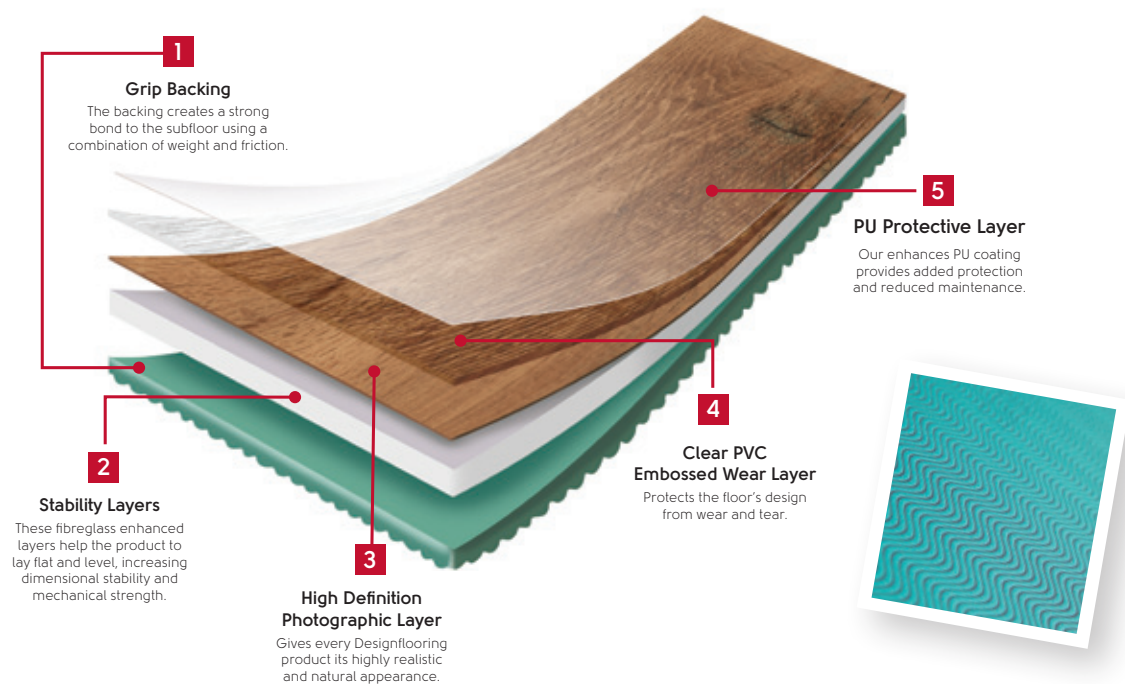

2.2 Application

Designflooring LooseLay flooring is commonly used commercially in education, healthcare, aged care, speciality retail and commercial, light commercial, and residential interiors where long lasting performance is preferred. The product can be laid without adhesive or with only pressure-sensitive adhesive.

The product considered in this EPD meets the specification of ISO 10582 (EN649) - Resilient floor covering - Heterogeneous polyvinyl chloride floor covering – Specification.

The product meets the characteristics for the classifications 22, 23, 32, 33, 42 in EN ISO 10874:2012 (EN 685).

2.3 Technical Data

The technical data sheets of the products are available at www.designflooring.com

The table below shows the technical characteristics

Construction of the product

Characteristics		Average value	Unit	Minimum value	Maximum value
Product thickness		4.5 (0.177)	mm (inch)	5.0 (0.227)	4.0 (0.127)
Wear layer thickness		0.55 (0.0217)	mm (inch)	-	0.55 (0.0217)
Product weight		7.472 (24.48)	g/m ² (oz/ft ²)	7.372 (20.96)	7.572 (28.00)
Product size	Planks	1050x250 (41.3x9.85)	mm (inch)	+/- 1.3 mm/lin m (+/-0.016"/lin ft)	
	Tiles	500x610 (19.7x24)	mm (inch)		

2.4 Application rules

Product Standards:

- EN ISO 10582:2012 (EN 649) – Resilient Floor coverings – Heterogeneous vinyl floor coverings - Specification.
- EN ISO 10874:2012 (EN 685) – Resilient, Laminate and Textile Floor coverings - Classification.
- EN 13501-1:2002 – Fire Classification of construction products and building elements.
- EN 14041:2004 – Resilient, Textile and Laminate Floor coverings - Essential characteristics.

Designflooring floor coverings comply with European technical approval standards (CE Conformity and marking) and respective national approval standards for building products, e.g. the general technical approval of the German Institute for Building Technology (DIBt).

2.5 Base materials

Vinyl plank is made primarily from calcium carbonate (limestone), polyvinyl chloride, plasticisers and additives (i.e. pigments and stabilisers). It is structured with five layers: two PVC backing layers, one high definition photographic layer, one clear PVC embossed wear layer and a last PU protective layer.

Components	%	Comments
PVC	23.3	Polyvinyl chloride suspension
Internal recycled material	14.6	Internal factory recyclate
External recycled compounds	3.4	External recyclate compounds
Filler	44.7	Calcium carbonate
Plasticiser	10.1	Diethyl terephthalate (DOTP)
Stabilisers	1.0	Ca/Zn, Ba/Zn stabiliser, Ba stearate
Process aid	0.4	Acrylic copolymer
Ink, pigments	0.3	Carbon black, ink
Recycled semi-hardness sheet	1.4	Reinforced layer PVC sheet
Glass fibre	0.7	Vinyl acetate binding glass fibre
Coating	0.1	Polyurethane UV cured finish

Production of main materials

Limestone:

Calcium carbonate used as inert filler. It is an abundant mineral found in all parts of the world. It can be ground to varying particle sizes and is widely used as filler in formulated flooring systems.

Polyvinyl chloride:

Commonly abbreviated to PVC and derived from fossil fuel and salt, it is the third-most widely produced polymer, after polyethylene and polypropylene. Petroleum or natural gas is processed to make ethylene. Salt electrolysis produces chlorine. Ethylene and chlorine react together to produce ethylene dichloride, which is further processed at high temperature into vinyl chloride monomer. Polymerisation of vinyl chloride monomer converts it into a fine white powder called vinyl resin. Recycled polyvinyl chloride is also used.

Plasticisers:

Plasticisers are colourless and odourless liquids commonly used in vinyl products to make them more flexible and /or durable. Plasticisers used in the production of these floorcoverings are DOTP [manufactured from DMT (a common material for producing fizzy drink bottles, for example) and 2- ethylhexanol] or DINP [manufactured from phthalic anhydride and isononanol].

Additives:

These products are used to make vinyl resistant to light and oxidation and are made of alkaline earth metal (barium or calcium) and zinc salts of fatty acids. These are viscous liquids.

Finish:

Polyacrylate UV cured lacquer.

Ink and Pigment:

Inks are used to print the decorative patterns.

According to the latest revision of Article 59, the Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and restriction of Chemicals (REACH), "the REACH list", of substances of very high concern' (SVHC) the product is not manufactured with or contains any of these substances above a concentration of 0.1% by weight.

2.6 Manufacture

In the first step, the raw materials are mixed and heated. The mixture is calendared in sheet to create the backing or the transparent PVC layers. The sheets are cut and laminated with a printed film. The semi-finished product is coated with a lacquer and annealed. Finally, the product is cut into tiles or planks and packaged. Quality checks are made at each step of the production process.

The product is manufactured in three factories located in South Korea.

2.7 Installation

Installation can be done without adhesive or with pressure-sensitive adhesive or double-sided tape. Water based acrylic VOC compliant adhesive is recommended. During installation, 5% of the total material is cut off as waste. The scrap is modelled as being disposed of in landfill.

2.8 Use

The proper use of the described products is not a hazard to water, air and soil. It is inert in its proper use. No damage to health is expected under normal use.

Indoor Air Quality VOC emissions comply with the requirements of:

- The DIBt/AgBB (2012) scheme.
- The requirements of the standard method for the testing and evaluation of volatile organic chemical emissions from indoor sources using environmental chambers (version 1.1) as defined by the California Department of Public Health (CDPH) – FloorScore.
- According to the French evaluation method, the product achieves - Class A+ - Construction product sanitary labelling Decree no 2011-321 (mars 2011) related to VOC emissions.

2.9 Reference service life

We cannot give a RSL for the products because there are many scenarios according to the building type, the maintenance regime and the country where the floor is used.

2.10 Disposal

Leftovers arising from construction site as well as used products from deconstruction should be primarily routed for disposal in landfill. They can also be incinerated. Both scenarios are used in this EPD.



3. LCA: Calculation rules

3.1 Declared unit

The declared unit is 1 m² of installed floor covering with a weight of 7.472 kg/m² for specified application and use areas according EN ISO 10582.

3.2 System boundaries

It is a cradle to grave with options EPD. The system boundary is based on the EN 15804 description.

- Modules A1-A3 include processes that provide materials and energy input for the system, manufacturing and transport processes up to the factory gate, as well as waste processing.
- Module A4 includes transport of the floor covering to the place of installation.
- Module A5 includes the production of adhesive for the installation of the floor covering, the manufacture and the transport of the 5% extra product order for laying and landfilling of these 5% off-cuts and recycling of packaging material.
- Module B2 includes provision of cleaning agent, energy and water consumption for the cleaning of the floor covering. The LCA results in this EPD are declared for a one year usage.
- Module C1 considers electricity supply for the de-construction of the flooring.
- Module C2 includes transportation of the post-consumer waste to waste processing or landfill.
- Modules C3/I: end of life scenarios are declared for 100% incineration of the used products.
- Module C4/L: end of life scenario are declared for 100% landfilling of the used products.
- Module D is not considered in this study.

The table below shows the system boundaries according to EN 15804

Product stage			Construction stage		Use stage							End of life stage				Benefit load
Raw material supply	Transport	Manufacturing	Transport	Construction – installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction Demolition	Transport	Waste processing	Disposal	Reuse, recovery or recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3/I	C4/L	D
	X		X	X	NR	X	NR	NR	NR	NR	NR	X	X	X	X	MND

NR : module not relevant MND : Module not determined

3.3 Estimates and assumptions

Stage A4 – transport to customers: Average transport distance by ship is 19,596 km from factory to UK warehouse. Transport distance by truck is 2,090 km (40 km from factory to Asian port and 2,050 km from unload port to customers).

Stage A5 - installation: the product can be laid without adhesive or with pressure-sensitive adhesive or with double-sided pressure-sensitive adhesive tape. Installation scenario assumes one third of each method is used.

The leftovers from installation stage are considered as disposed in landfill. 65% recycling / 35% landfilling of the packaging is assumed for paper and cardboard. 100% landfilling is assumed for LDPE packaging. Pallets are 100% re-used. The materials for recycling leave the system without environmental burden and without crediting any value.

Stage B2 - use: there are various cleaning procedures for the floor dependent on its intended use. We assume a cleaning regime of a daily (working day) dust mop, a weekly damp mop and a monthly floor restore. The use of an electric device (1.5 kWh, 600 m²/h) for 25% of these operations is assumed.

Stage C - end of life: two scenarios are declared for end of life stages: incineration (module C3I) and landfilling (C4/L). It is assumed that no significant degradation of materials occurs during landfilling. It is considered that there are no significant emissions for more than 100 years. The incineration facility is considered to have a yield $R < 0.6$ and the process is not considered as recycling.

3.4 Cut-off criteria

In this study, all available data from production are considered, i.e. raw materials used, utilised thermal energy, and electric power consumption. It can be assumed that the total sum of neglected processes does not exceed 5% of energy usage and mass for the overall life cycle. The manufacturer provided data on the transport expenditure for all relevant material flows. Machines and facilities required during production are not included

3.5 Background data

For life cycle modelling of the considered products, the software OpenLCA v1.4.1 has been used to model the product systems considered in this study. All relevant background datasets are taken from the Ecoinvent V3.1 database. The system model of the database used is "Allocation, Ecoinvent default". The datasets from Ecoinvent date from 2012 to 2015 and are documented in the online documentation.

3.6 Data quality

The data quality can be described as fair to good. The primary data collection has been done thoroughly, all relevant flows are considered. Technological, geographical and temporal representativeness is given.

3.7 Period under review

The period under review is from April 2014 to March 2015.

3.8 Allocations

The production site use one assembly line to produce only this product. The allocation of materials, waste and energy have been determined during the data collection process.

3.9 Comparability

Environmental product declarations of construction products may not be comparable if they do not comply with EN 15804 and environmental product declarations within the same category from different programs may not be comparable.

4. LCA: Scenario and additional technical information

The following technical information is given for the declared modules

Module A4: transport to the construction site

Parameters	Values	Units
Litre of fuel (truck) Euro 3/Euro 5	0.18/0.16	l/km
Litre of fuel (ship)	2.15E-3	l/km
Transport distance (truck)	2090	km
Transport distance (ship)	19596	km
Capacity utilisation	85	%

Module A5: installation in the building

Parameters	Values	Units
Ancillary material for installation		
- pressure sensitive adhesives (1/3)	0.2	kg
- double side PSA tape (1/3)	4	lm
- none (1/3)	0	
Material loss	5	%

Module B2: maintenance

Name	Value	Unit
Maintenance cycle:		
Dust mop	260	number/year
Damp mop - cleaner	52	
Spray buff - restorer	12	
Water consumption	5.8	l/m ² /year
Auxiliary (detergent)	0.12	l/m ² /year
Electricity consumption	0.22	kWh/m ² /year

5. LCA: Results

Caution should be used when comparing the results presented in this EPD to the environmental performance of other vinyl tile products as the thickness or weight of floors will influence the environmental impacts.

The results for module B2 refer to a period of one year. The values of B2 have to be multiplied by the estimated service life to give the results corresponding to a time period.

Environmental impacts for one year use

Environmental Impacts			Global warming potential GWP kg CO ₂ equiv.	Depletion potential of the stratospheric ozone layer ODP kg CFC 11 equiv.	Acidification potential of land and water sources AP kg SO ₂ equiv.	Eutrophication potential EP kg PO ₄ equiv.	Formation potential of tropospheric ozone photochemical oxidants POCP kg Ethene equiv.	Abiotic depletion potential for non fossil resources kg Sb equiv.	Abiotic depletion potential for fossil resources MJ
Product stage	Total Production	A1-A3	1.27E+01	2.80E-05	3.14E-02	9.78E-01	2.60E-03	2.80E-05	1.69E+02
Construction stage	Transport	A4	4.37E+00	8.15E-06	4.19E-02	5.84E-03	1.53E-03	8.15E-06	6.32E+01
	Installation	A5	1.13E+00	2.62E-06	5.14E-03	5.14E-02	3.16E-04	2.62E-06	1.82E+01
Use stage	Use	B1	MND	MND	MND	MND	MND	MND	MND
	Maintenance	B2	8.34E-01	4.94E-06	4.07E-03	2.43E-03	2.20E-04	4.94E-06	1.41E+01
	Repair	B3	MND	MND	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND	MND	MND
	Operational Energy Use	B6	MND	MND	MND	MND	MND	MND	MND
	Operational Water Use	B7	MND	MND	MND	MND	MND	MND	MND
End of life	De-construction	C1	1.33E-02	1.98E-09	3.93E-05	1.40E-04	1.89E-06	2.33E-08	1.84E-01
	Transport	C2	3.82E-02	1.05E-07	1.30E-04	3.07E-05	6.40E-06	1.05E-07	5.70E-01
	Waste Processing	C3/I	7.85E+00	5.24E-07	1.22E-02	4.32E-03	7.18E-04	1.00E-05	2.52E+01
	Disposal	C4/L	4.84E-01	2.08E-08	4.01E-04	2.57E-02	1.03E-04	1.07E-07	1.90E+00
Potential benefits and loads beyond the system boundaries		D	MND	MND	MND	MND	MND	MND	MND

MND : Module not determined NR : module not relevant



Use of resources for one year

Resources use			Use of renewable primary energy excluding renewable primary energy resources used as raw materials	Use of renewable primary energy resources used as raw materials	Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials	Use of non renewable primary energy resources used as raw materials	Total use of non renewable primary energy resources (primary energy and primary energy resources used as raw materials)	Use of secondary material	Use of renewable secondary fuels	Use of non renewable secondary fuels	Use of net fresh water
			MJ	MJ	MJ	MJ	MJ	MJ	kg	MJ	MJ	m3
Product stage	Total Production	A1-A3	7.00E+00	3.81E+00	1.08E+01	1.37E+02	1.03E+02	2.40E+02	2.91E-01	0.00E+00	0.00E+00	7.86E-01
Construction stage	Transport	A4	1.03E+00	0.00E+00	1.03E+00	6.59E+01	0.00E+00	6.59E+01	0.00E+00	0.00E+00	0.00E+00	2.75E-03
	Installation	A5	7.71E-01	0.00E+00	7.71E-01	1.68E+01	5.65E+00	2.24E+01	0.00E+00	0.00E+00	0.00E+00	9.12E-01
Use stage	Use	B1	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND
	Maintenance	B2	7.81E-01	0.00E+00	7.81E-01	1.73E+01	3.10E-01	1.76E+01	0.00E+00	0.00E+00	0.00E+00	1.02E+00
	Repair	B3	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND
	Operational Energy Use	B6	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND
	Operational Water Use	B7	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND
End of life	De-construction	C1	2.72E-02	0.00E+00	2.72E-02	3.70E-01	0.00E+00	3.70E-01	0.00E+00	0.00E+00	0.00E+00	2.08E-01
	Transport	C2	7.33E-03	0.00E+00	7.33E-03	5.82E-01	0.00E+00	5.82E-01	0.00E+00	0.00E+00	0.00E+00	2.10E-02
	Waste Processing	C3/I	2.21E+00	0.00E+00	2.21E+00	3.04E+01	0.00E+00	3.04E+01	0.00E+00	0.00E+00	0.00E+00	3.60E+01
	Disposal	C4/L	5.68E-02	0.00E+00	5.68E-02	2.02E+00	0.00E+00	2.02E+00	0.00E+00	0.00E+00	0.00E+00	3.55E-01
Potential benefits and loads beyond the system boundaries		D	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND

MND : Module not determined NR : module not relevant



Wastes and other output flows

Wastes and other output flows			Hazardous waste disposed	Non hazardous waste disposed	Radioactive waste disposed	Components for re-use	Materials for recycling	Materials for energy recovery	Exported thermal energy	Exported electric energy
			kg	kg	kg	kg	kg	kg	MJ	MJ
Product stage	Total Production	A1-A3	2.30E-01	2.34E+00	3.70E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Construction stage	Transport	A4	1.00E+00	1.30E+01	9.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Installation	A5	8.53E-02	1.38E+00	4.50E-01	1.27E-01	5.81E-02	0.00E+00	0.00E+00	0.00E+00
Use stage	Use	B1	MND	MND	MND	MND	MND	MND	MND	MND
	Maintenance	B2	4.66E-02	3.92E-01	6.49E-05	0.00E+00	6.00E-03	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	MND	MND	MND	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND	MND	MND	MND
	Operational Energy Use	B6	MND	MND	MND	MND	MND	MND	MND	MND
	Operational Water Use	B7	MND	MND	MND	MND	MND	MND	MND	MND
End of life	De-construction	C1	5.40E-04	4.91E-03	2.68E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	3.70E-04	2.98E-02	3.93E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Waste Processing	C3/I	3.67E+00	8.74E-01	1.44E-05	0.00E+00	0.00E+00	5.38E+00	9.08E+01	3.03E+01
	Disposal	C4/L	1.87E-03	7.50E+00	1.10E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Potential benefits and loads beyond the system boundaries		D	MND	MND	MND	MND	MND	MND	MND	MND

MND : Module not determined NR : module not relevant

6. Life cycle interpretation

For the scenario 100% landfilling, non-renewable energy use for the processes of stages A1-A3 represents 69% of the non-renewable energy consumption of the total energy consumption. The transport to customers is the second contributor (19% and 18% respectively). The product stage is the main contributor to the global warming potential (63%, sourcing represents 34% and manufacturing 30%), for ozone depletion potential (64%) and the abiotic depletion of fossil resources (62%). Transport to customers is the first contributor for acidification potential (50%). Construction stage is the second contributor for GWP, POCP mainly because of the transport of the product. End of life is the first contributor to POCP (mainly because of the VOC and CO emissions) and for non-hazardous waste (disposal of the product).

For the scenario 100% incineration, the span of the non-renewable energy use is different. The product stage is the first contributor (64% PENRT and total energy consumption), transport is the second (18%) and incineration is the third (9% PENRT). It increases the GWP by 38%.

References

ISO 14040	ISO 14040:2009-11 Environmental management - Life cycle assessment - Principles and framework
ISO 14044	ISO 14044:2006-10 Environmental management - Life cycle assessment - Requirements & guidelines
EN 15804	EN 15804:2010-08 Sustainability of construction works - Environmental Product Declarations - Core rules for the product category of construction products
PCR 1201 V2	Product Category Rule 1201 - Construction products and services V2

