

# ENVIRONMENTAL PRODUCT DECLARATION



Trocellen Class adhesive 3 mm  
Trocellen Class adhesive 12 mm  
Trocellen Class ALU adhesive 12 mm  
Trocellen Class ALU adhesive 20 mm  
Trocellen Class ALU.S adhesive 16 mm



From:  
Trocellen Italia S.p.A.

Programme: The International EPD® System  
Programme operator: EPD International AB

UN CPC 363  
*Other plastic products*

PCR 2019:14: "Construction products" version 1.11  
SUB PCR: c-PCR-005 Thermal Insulation products (EN 16783)

Geographical scope: Global  
EPD registration number: S-P-04708  
Review date: 21-07-2023  
Publication date: 03-03-2022  
Valid until: 03-03-2027

In accordance with ISO 14025 and EN15804:2012+A2:2019  
An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)  
BU-Insulation – Rev. August 2023

[www.trocellen.com](http://www.trocellen.com)

## 1 INTRODUCTION

Type III Environmental Declarations contain verifiable and accurate information on the environmental performance of a product, quantified based on a life cycle impact assessment. Their objective is to produce reliable information expressed on a common basis that enables comparison of environmental performance between products performing the same function. In this perspective of product sustainability, Type III Environmental Declarations are developed in compliance with the requirements and prescriptions dictated by the voluntary standard EN ISO 14025:2010. To ensure that LCA studies are carried out consistently for all products within the same category, a precise set of rules and methodologies shall be respected. These rules are indicated by the PCR - Product Category Rules - which formulate specifications regarding the procedure of a life cycle analysis for a specific product category, ensuring results coherency and comparability.

## 2 COMPANY AND PRODUCT INFORMATION

### 2.1 TROCELLEN COMPANY<sup>1</sup>

Trocellen is a multinational company owned by Furukawa Electric Co. Ltd, internationally renowned for the design and manufacture of crosslinked polyolefin foams. Through its different Business Units, the company is able to meet the specific needs of the market with a wide range of products and solutions.

It manufactures both semi-finished and finished products. The Trocellen products stand out for their manufacturing processes and the many industrial sectors in which they can be used: Insulation, automotive, footwear, sport and leisure, adhesive tapes and packaging. Trocellen makes safety a lifestyle and turns safety into a lifestyle.

#### **Insulation Business Unit**

The Insulation Business Unit mainly specialized in Sound and Thermal insulation for the building industry. The goal is to create comfortable environments for people or rather to “help people live better!”.

#### **Certified quality**

As a guarantee of providing stable, high-performance products and services Trocellen pays particular attention to quality assurance. We aim at monitoring and improving all our production, management and customer service processes. We dedicate ourselves to continuously developing all areas that might influence the performance of our products, services and have a positive effect on cooperation with our partners and on customer satisfaction.

---

<sup>1</sup> EPD owner: Trocellen Italia Spa  
Head office: Via Della Chimica 21/23, 20867 Caponago (MB), Italy  
Phone: +39 02 959621

Below there is the list of ISO certificates given to Trocellen Italia sites:

- ISO 45001 - Occupational Health and Safety Management Systems
- ISO 9001 – Quality management
- ISO 50001 – Energy management

## 2.2 THE PRODUCT RANGE

TROCELLEN CLASS is the brand name for CE marked & Euroclass product portfolio of Trocellen.

CE marking guarantees safe products within Europe, resulting in a high degree of legal certainty in the planning process. Moreover, CE marking means safety, as all products were checked by independent bodies.

The product range is based on closed cell, chemically cross-linked, polyolefin resin foam products, offering high performance in terms of flame retardant protection in the event of fire, plus extremely long-lasting thermal insulation performance and soundproofing. TROCELLEN CLASS is suitable for the insulation of air ducts, guaranteeing long-lasting and effective thermal insulation in order to avoid heat loss and consequently save costs. It is easily applied through pre-adhesion process. The right thickness needs to be calculated according to the necessary thermal insulation: Trocellen has developed a specific software (acc. to ISO 12241) in order to determine the thickness and the energy saving during the use stage of the product (<https://insulation.trocellen.com/tools/use-trocellen-calculation-software-free/> )

Main Advantages:

- Excellent condensation barrier ability
- Excellent  $\mu$ -value - from 1000 to 15000
- Costant and long lasting  $\lambda$
- Fire resistant, flammability classification can be B-s2,d0, no dripping.
- Ultra low smoke toxicity and opacity (F1 classification according to NF 16-101)
- Safe, non-toxic, non-allergen, mould resistant (VDI 6022-1 certified)
- Very low VOC emission: A+ classification according to French systems (tested according ISO 16000)

TECHNICAL DATA					
TECHNICAL CHARACTERISTICS	NORM	UNIT	TROCELLEN CLASS ADHESIVE	TROCELLEN CLASS ALU ADHESIVE	TROCELLEN CLASS ALUS ADHESIVE
Reaction to fire	EN 13501-1	Euroclass	B-s2,d0 - BL-s1,d0 for thickness range 3-12 mm	B-s2,d0 - BL-s1,d0 for thickness range 3-14 mm C-s2,d0 - BL-s1,d0 for thickness range 15-24 mm	B-s2,d0 - BL-s1,d0
Smoke index value	NF F 16 - 101	-	F1	F1	F1
Trace quantities of water soluble ions	EN 13468	mg/kg	7,5	10	8
Thermal conductivity coefficient at 0 °C ( $\lambda_D$ -value) (12 mm)	EN 12667	W/mK kcal/mh°C	0,0352 0,0303	0,0358 0,0308	0,0355 0,0305
Thermal conductivity coefficient at 40 °C ( $\lambda_D$ -value) (12 mm)	EN 12667	W/mK kcal/mh°C	0,0429 0,0369	0,0435 0,0374	0,0424 0,0365
Water vapour diffusion factor ( $\mu$ -value)	EN 12086 EN ISO 12572	-	$\geq 1000$ (1270)	$\geq 15000$	$\geq 15000$
Density	EN ISO 845	kg/m <sup>3</sup>	28	28	28
Thickness	EN ISO 1923	mm	from 3 to 12 (see base specifications)	from 3 to 24 (see base specifications)	from 3 to 16 (see base specifications)
Colour	BASE spec.	-	light green	light green + aluminium sheet	light green + aluminium sheet
Compression stress at 10%	EN ISO 3386/1	kPa	12	10	12
Water absorption after 28 days	ISO 2896	Vol%	<3	<3	<3
Dimensional stability (< 5%)	ISO 2796	°C	90	90	90
Maximum operative temperature range		°C	-80 ÷ +90	-80 ÷ +100	-80 ÷ +100
Maximum operative temperature range with mechanical stress		°C	-40 ÷ +90	-40 ÷ +100	-40 ÷ +100

Trocellen products have showed a service life of more than 23 years on site, with the same performance and no damage. The thermal conductivity was measured and resulted with same values as measured just after being manufactures. This demonstrates the long-lasting life of Trocellen products.

The TROCELLEN CLASS product range can be divided in 3 sub-categories, which are analyzed in this document:

### TROCELLEN CLASS ADHESIVE

Chemically cross-linked, closed cell polyethylene, density 28 kg/m<sup>3</sup>, light green, adhesive.

- CE marked (CPR), according to the European Standard (PEF) EN 14313
- Euroclass B-s2,d0 - BL-s1,d0 for thickness range 3-12 mm
- Classified F1, toxicity and opacity of fumes in case of fire, according to NF F 16-101
- Thermal conductivity coefficient at 10°C ( $\lambda_D$ -value) = 0,0373 W/mK
- Water vapour diffusion factor ( $\mu$ -value)  $\geq 1000$ .

### TROCELLEN CLASS ALU ADHESIVE

Chemically cross-linked, closed cell polyethylene, density 28 kg/m<sup>3</sup>, light green, adhesive, multilayer, laminated with a smooth aluminum sheet.

- CE marked (CPR), according to the European Standard (PEF) EN 14313
- Euroclass B-s2,d0 – B<sub>L</sub>-s1,d0 for thickness range 3-14 mm; Euroclass C-s2,d0 – B<sub>L</sub>-s1,d0 for thickness range 15-25 mm
- Classified F1, toxicity and opacity of fumes in case of fire, according to NF F 16-101
- Thermal conductivity coefficient at 10°C ( $\lambda_D$ -value) = 0,0386 W/mK
- Water vapour diffusion factor ( $\mu$ -value)  $\geq$  15000.

### TROCELLEN CLASS ALU.S ADHESIVE

Chemically cross-linked, closed cell polyethylene, density 28 kg/m<sup>3</sup>, light green, adhesive, multilayer, laminated with a smooth aluminum sheet, with improved performance.

- CE marked (CPR), according to the European Standard (PEF) EN 14313
- Euroclass B-s2,d0 – B<sub>L</sub>-s1,d0 for thickness range 3-16 mm
- Classified F1, toxicity and opacity of fumes in case of fire, according to NF F 16-101
- Thermal conductivity coefficient at 10°C ( $\lambda_D$ -value) = 0,0387 W/mK
- Water vapour diffusion factor ( $\mu$ -value)  $\geq$  15000.

For every sub-category, at least one product thickness has been evaluated. Following there are the information related to the content per 1 kg of product.

Table 1: Formula declaration per 1 kg of Trocellen Class adhesive 3 mm

Trocellen Class adhesive 3 mm		% (kg/kg)
PRODUCT	Polymers	20,1%
	Additives	6,8%
	Flame retardants	10,2%
	Adhesive components	62,9%
		<b>(kg/kg)</b>
PACKAGING	PE film	0,016
	Cardboard tube	0,019

Note: Conversion to m<sup>2</sup> (0,0840); Resistance 0,0852 (m<sup>2</sup>\*K/W)

Table 2: Formula declaration per 1 kg of Trocellen Class adhesive 12 mm

Trocellen Class adhesive 12 mm		% (kg/kg)
PRODUCT	Polymers	38,1%
	Additives	12,8%
	Flame retardants	19,3%
	Adhesive components	29,8%
		<b>(kg/kg)</b>
PACKAGING	PE film	0,015
	Cardboard tube	0,023

Note: Conversion to m2 (0,3360), Resistance 0,3409 (m2\*K/W)

Table 3: Formula declaration per 1 kg of Trocellen Class ALU adhesive 12 mm

Trocellen Class ALU adhesive 12 mm		% (kg/kg)
PRODUCT	Polymers	29,3%
	Additives	9,8%
	Flame retardants	14,8%
	Adhesive components	22,9%
	ALU foil	23,1%
		<b>(kg/kg)</b>
PACKAGING	PE film	0,023
	Cardboard tube	0,046

Note: Conversion to m2 (0,3360), Resistance 0,0352 (m2\*K/W)

Table 4: Formula declaration per 1 kg of Trocellen Class ALU adhesive 20 mm

Trocellen Class ALU adhesive 20 mm		% (kg/kg)
PRODUCT	Polymers	35,9%
	Additives	12,0%
	Flame retardants	18,2%
	Adhesive components	16,8%
	ALU foil	17,0%
		<b>(kg/kg)</b>
PACKAGING	PE film	0,022
	Cardboard tube	0,049

Note: Conversion to m2 (0,560); Resistance 0,5587 (m2\*K/W)

Table 5: Formula declaration per 1 kg of Trocellen Class ALU.S adhesive 16 mm

Trocellen Class ALU.S adhesive 16 mm		% (kg/kg)
PRODUCT	Polymers	28,6%
	Additives	9,6%
	Flame retardants	14,5%
	Adhesive components	16,8%
	ALU foil	30,5%
		<b>(kg/kg)</b>
PACKAGING	PE film	0,016
	Cardboard tube	0,035

Note: Conversion to m2 (0,4480), Resistance 0,4507 (m2\*K/W)

The products are manufactured at the company's own facilities and specifically in the following plants:

- Via Della Chimica, 21 – 23, 20867 Caponago (MB), Italy.

## **3 LCA INFORMATION**

### **3.1 DECLARED UNIT**

The declared unit is 1 m<sup>2</sup> of final product.

### **3.2 REFERENCE SERVICE LIFE**

Not applicable for the analysis.

### **3.3 TIME REPRESENTATIVENESS**

The temporal boundaries include the period from January 2022 to December 2022, a time frame considered to be representative of the company's activities. These were chosen given the fullest availability of information relating to the analysis.

### **3.4 SYSTEM BOUNDARIES**

In accordance with the reference standard EN 15804 and the PCR followed, the life cycle environmental impact assessment has the following boundaries: "from cradle to gate with modules C1-C4 and module D". (Figure 1, Table 6). Modules A4-A5 and B1-B7 were excluded. In the end-of-life phase, the product is only sent for disposal (landfill or incineration).



Use stage has not been considered in the study: further considerations can be done about the energy saving according to insulation thermal properties of the product(See also 2.2 paragraph).

	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE							USE STAGE							END OF LIFE STAGE			BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Decommissioning, demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential				
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D				
	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X				
Geography	GLO	GLO	IT	-	-	-	-	-	-	-	-	-	-	IT	IT	IT	EU				
Specific data used	<11% Trocellen Class adhesive 3 mm <8% Trocellen Class Alu adhesive 12 mm <13% Trocellen Class Alu adhesive 12 mm <8% Trocellen Class Alu adhesive 20 mm <7% Trocellen Class AluS adhesive 16 mm			-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
Variation - product				Not relevant			-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - site	Not relevant			-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		

Figure 1: ND= Module not declared

Table 6 – Stage description

STAGE	INDICATOR	
<i>A1 – Raw material supply</i>	Raw material	<b>UPSTREAM</b>
	Energy consumption: Electrical/heat	
<i>A2 – Transport</i>	Raw material transportation Internal transportation	
<i>A3 – Manufacturing</i>	Materials (packaging)	
	Waste transportation	
	Waste treatment	
<i>C1 – De-construction demolition</i>	Dismantling-related consumption	<b>END OF LIFE</b>
<i>C2 – Transport</i>	Waste transportation	
<i>C3 – Waste processing</i>	Waste treatment	
<i>C4 – Disposal</i>	Disposal	


In addition, the following assumptions have been made:

- Impacts associated with demolition (C1) are assumed to be neglectable. The eventual removal of the product does not require the use of electricity or other inputs. Removal can generally be done manually if necessary.
- The product at the end of its life is sent to landfill/incineration with appropriate CER code, therefore disposal at a distance of 53.1 km is assumed as a scenario.
- The product after demolition activities is not recovered (C3).
- The product after demolition activities is managed according to ISPRA statistics (Italian reference).
- The result of phase D is zero, because there are no end-of-life benefits (recycling, recovery and/or reuse).

### 3.5 SYSTEM SCHEME AND MANUFACTURING PROCESS

For each information module, characteristic environmental performance indicators were investigated. In selecting the data to be used for the study, preference was given to primary data that could be catalogued by the company. These data constitute the primary source of information for the inventory analysis. The latter can be grouped according to environmental performance indicators, to which the results of the environmental performance will then be referred. On the basis of these indicators, the software model was elaborated and the inventory analysis was then developed according to macro-consumptions referring to the

declared unit that characterises the study. The block diagram relating to production is presented below (Figure 2).

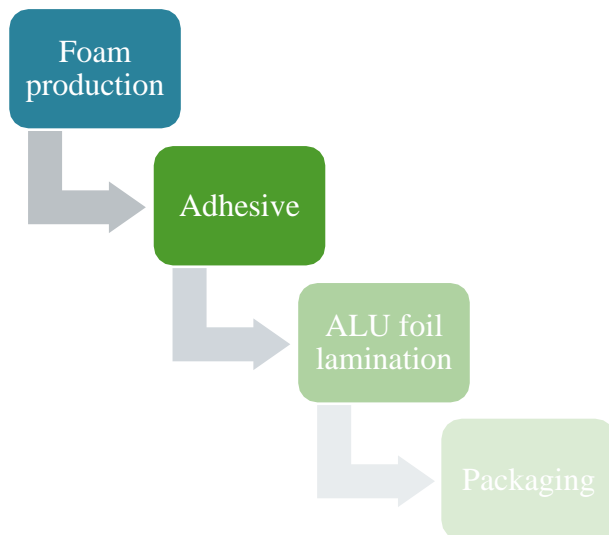

*Figure 2 – Production process block diagram*

### 3.6 DATABASE AND SOFTWARE

SimaPro calculation software (SimaPro 9) and the selected databases "ECOINVENT" were used for inventory processing and eco-profiles calculation.

## 4 ENVIRONMENTAL RESULTS

### 4.1 POTENTIAL ENVIRONMENTAL IMPACTS

Below are the results of the eco-profile obtained from the life cycle analysis of products subject to environmental declaration, along the impact categories in accordance with UNI EN 15804. The changes in the results found in this document compared to the previous EPD concern: the update of the Ecoinvent database, the update of the inventory data and the update of the declared unit which went from kg to m<sup>2</sup> of product

#### Trocellen Class adhesive 3 mm

Table 7: Ecoprofile assessment according to declared unit

CATEGORY IMPACT	UM	A1-A3	C1	C2	C3	C4	TOTAL	D
Global Warming Potential - total	kg CO2 eq.	5,73E-01	0,00E+00	7,37E-04	0,00E+00	8,33E-02	6,57E-01	0,00E+00
Global Warming Potential - fossil fuels	kg CO2 eq.	5,67E-01	0,00E+00	7,35E-04	0,00E+00	8,44E-03	5,76E-01	0,00E+00
Global Warming Potential - biogenic	kg CO2 eq.	5,72E-03	0,00E+00	1,96E-06	0,00E+00	7,49E-02	8,06E-02	0,00E+00
Global Warming Potential - land use and land use change (	kg CO2 eq.	2,73E-04	0,00E+00	2,91E-07	0,00E+00	2,23E-06	2,76E-04	0,00E+00
Depletion potential of the stratospheric ozone layer	kg CFC-11 eq.	6,71E-08	0,00E+00	1,71E-10	0,00E+00	4,73E-10	6,78E-08	0,00E+00
Acidification potential, Accumulated Exceedance	mol H+ eq.	2,21E-03	0,00E+00	3,72E-06	0,00E+00	2,99E-05	2,24E-03	0,00E+00
Eutrophication potential - freshwater	kg P eq.	8,90E-05	0,00E+00	4,77E-08	0,00E+00	1,53E-06	9,06E-05	0,00E+00
Eutrophication potential - marine	kg N eq.	7,41E-04	0,00E+00	1,28E-06	0,00E+00	1,47E-04	8,89E-04	0,00E+00
Eutrophication potential - terrestrial	mol N eq.	4,13E-03	0,00E+00	1,40E-05	0,00E+00	1,12E-04	4,25E-03	0,00E+00
Photochemical ozone formation	kg NMVOC eq.	1,12E-03	0,00E+00	3,42E-06	0,00E+00	5,16E-05	1,18E-03	0,00E+00
Abiotic depletion potential - non-fossil resources*	kg Sb eq.	3,58E-06	0,00E+00	2,58E-09	0,00E+00	8,44E-09	3,60E-06	0,00E+00
Abiotic depletion potential - fossil resources*	MJ, net calorific value	1,01E+01	0,00E+00	1,10E-02	0,00E+00	3,79E-02	1,01E+01	0,00E+00
Water use*	m <sup>3</sup> world eq. deprived	2,84E-01	0,00E+00	3,36E-05	0,00E+00	1,10E-03	2,86E-01	0,00E+00
Additional mandatory environmental impact indicators								
Global Warming Potential (GWP-GHG)**	kg CO2 eq.	5,51E-01	0,00E+00	7,29E-04	0,00E+00	5,35E-02	6,05E-01	0,00E+00
Additional voluntary environmental impact indicators								
Particulate Matter emissions	Disease incidence	1,86E-08	0,00E+00	5,30E-11	0,00E+00	2,33E-09	2,10E-08	0,00E+00
Ionizing radiation, human health	kBq U235 eq.	2,15E-02	0,00E+00	5,76E-05	0,00E+00	2,34E-04	2,18E-02	0,00E+00
Eco-toxicity - freshwater*	CTUe	3,61E+01	0,00E+00	8,74E-03	0,00E+00	9,65E+00	4,58E+01	0,00E+00
Human toxicity, cancer effect*	CTUh	5,31E-09	0,00E+00	9,13E-12	0,00E+00	5,43E-10	5,86E-09	0,00E+00
Human toxicity, non-cancer effects*	CTUh	2,49E-10	0,00E+00	2,83E-13	0,00E+00	9,62E-11	3,46E-10	0,00E+00

Land use*	dimensionless	9,58E-01	0,00E+00	7,70E-03	0,00E+00	5,90E-02	1,02E+00	0,00E+00
Indicators describing resource use								
Use of renewable primary energy as energy carrier (PERE)	MJ, net calorific value	2,04E-01	0,00E+00	1,19E-04	0,00E+00	9,84E-02	3,03E-01	0,00E+00
Use of renewable primary energy resources used as raw materials (PERM)	MJ, net calorific value	9,69E-02	0,00E+00	3,94E-05	0,00E+00	-9,70E-02	0,00E+00	0,00E+00
Total use of renewable primary energy (PERT)	MJ, net calorific value	3,01E-01	0,00E+00	1,58E-04	0,00E+00	1,41E-03	3,03E-01	0,00E+00
Use of non renewable primary energy as energy carrier (PENRE)	MJ, net calorific value	5,10E-04	0,00E+00	4,64E-07	0,00E+00	1,06E+01	1,06E+01	0,00E+00
Use of non renewable primary energy resources used as raw materials (PENRM)	MJ, net calorific value	1,06E+01	0,00E+00	1,12E-02	0,00E+00	-1,06E+01	0,00E+00	0,00E+00
Total use of non renewable primary energy resource (PENRT)	MJ, net calorific value	1,06E+01	0,00E+00	1,12E-02	0,00E+00	3,98E-02	1,06E+01	0,00E+00
Use of secondary material (SM)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels (RSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non renewable secondary fuels (NRSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water (FW)	m3	6,61E-03	0,00E+00	1,17E-06	0,00E+00	2,79E-05	6,64E-03	0,00E+00
Environmental information describing waste categories								
Hazardous waste disposed (HWD)	kg	7,32E-06	0,00E+00	2,93E-08	0,00E+00	1,24E-07	7,47E-06	0,00E+00
Non hazardous waste disposed (NHWD)	kg	4,41E-02	0,00E+00	5,76E-04	0,00E+00	7,99E-02	1,25E-01	0,00E+00
Radioactive waste disposed (RWD)	kg	8,90E-06	0,00E+00	7,58E-08	0,00E+00	2,24E-07	9,20E-06	0,00E+00
Environmental information describing output flows								
Components for re-use (CRU)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling (MFR)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery (MER)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported electrical energy (EEE)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported thermal energy (EET)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content								
Biogenic carbon content in product	kg C	Not significant						
Biogenic carbon content in accompanying packaging	kg C	2,79E-02						

\* Disclaimer: The results of this environmental impact must be treated with caution due to the high uncertainties and limited experience with the indicator. \*\* The indicator includes all greenhouse gases included in the total GWP, but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is therefore equal to the GWP indicator originally defined in EN 15804: 2012 + A1: 2013

## Trocellen Class adhesive 12 mm

Table 8: Ecoprofile assessment according to declared unit

CATEGORY IMPACT	UM	A1-A3	C1	C2	C3	C4	TOTAL	D
Global Warming Potential - total	kg CO2 eq.	1,93E+00	0,00E+00	2,95E-03	0,00E+00	3,33E-01	2,27E+00	0,00E+00
Global Warming Potential - fossil fuels	kg CO2 eq.	1,91E+00	0,00E+00	2,94E-03	0,00E+00	3,38E-02	1,94E+00	0,00E+00
Global Warming Potential - biogenic	kg CO2 eq.	2,09E-02	0,00E+00	7,84E-06	0,00E+00	2,99E-01	3,20E-01	0,00E+00
Global Warming Potential - land use and land use change (	kg CO2 eq.	1,27E-03	0,00E+00	1,16E-06	0,00E+00	8,91E-06	1,28E-03	0,00E+00
Depletion potential of the stratospheric ozone layer	kg CFC-11 eq.	2,77E-07	0,00E+00	6,86E-10	0,00E+00	1,89E-09	2,79E-07	0,00E+00
Acidification potential, Accumulated Exceedance	mol H+ eq.	8,76E-03	0,00E+00	1,49E-05	0,00E+00	1,20E-04	8,90E-03	0,00E+00
Eutrophication potential - freshwater	kg P eq.	3,88E-04	0,00E+00	1,91E-07	0,00E+00	6,10E-06	3,94E-04	0,00E+00
Eutrophication potential - marine	kg N eq.	3,45E-03	0,00E+00	5,13E-06	0,00E+00	5,90E-04	4,04E-03	0,00E+00
Eutrophication potential - terrestrial	mol N eq.	1,65E-02	0,00E+00	5,61E-05	0,00E+00	4,48E-04	1,70E-02	0,00E+00
Photochemical ozone formation	kg NMVOC eq.	4,40E-03	0,00E+00	1,37E-05	0,00E+00	2,06E-04	4,62E-03	0,00E+00
Abiotic depletion potential - non-fossil resources*	kg Sb eq.	1,83E-05	0,00E+00	1,03E-08	0,00E+00	3,38E-08	1,83E-05	0,00E+00
Abiotic depletion potential - fossil resources*	MJ, net calorific value	3,42E+01	0,00E+00	4,39E-02	0,00E+00	1,52E-01	3,44E+01	0,00E+00
Water use*	m3 world eq. deprived	1,12E+00	0,00E+00	1,34E-04	0,00E+00	4,41E-03	1,12E+00	0,00E+00
Additional mandatory environmental impact indicators								
Global Warming Potential (GWP-GHG)**	kg CO2 eq.	1,86E+00	0,00E+00	2,92E-03	0,00E+00	2,14E-01	2,07E+00	0,00E+00
Additional voluntary environmental impact indicators								
Particulate Matter emissions	Disease incidence	6,98E-08	0,00E+00	2,12E-10	0,00E+00	9,33E-09	7,93E-08	0,00E+00
Ionizing radiation, human health	kBq U235 eq.	9,56E-02	0,00E+00	2,30E-04	0,00E+00	9,36E-04	9,68E-02	0,00E+00
Eco-toxicity - freshwater*	CTUe	1,89E+02	0,00E+00	3,50E-02	0,00E+00	3,86E+01	2,28E+02	0,00E+00
Human toxicity, cancer effect*	CTUh	2,54E-08	0,00E+00	3,65E-11	0,00E+00	2,17E-09	2,76E-08	0,00E+00
Human toxicity, non-cancer effects*	CTUh	1,16E-09	0,00E+00	1,13E-12	0,00E+00	3,85E-10	1,54E-09	0,00E+00
Land use*	dimensionless	4,21E+00	0,00E+00	3,08E-02	0,00E+00	2,36E-01	4,48E+00	0,00E+00
Indicators describing resource use								
Use of renewable primary energy as energy carrier (PERE)	MJ, net calorific value	8,78E-01	0,00E+00	4,74E-04	0,00E+00	4,16E-01	1,30E+00	0,00E+00
Use of renewable primary energy resources used as raw materials (PERM)	MJ, net calorific value	4,11E-01	0,00E+00	1,58E-04	0,00E+00	-4,11E-01	0,00E+00	0,00E+00
Total use of renewable primary energy (PERT)	MJ, net calorific value	1,29E+00	0,00E+00	6,32E-04	0,00E+00	5,63E-03	1,30E+00	0,00E+00
Use of non renewable primary energy as energy carrier (PENRE)	MJ, net calorific value	2,13E-03	0,00E+00	1,86E-06	0,00E+00	3,63E+01	3,63E+01	0,00E+00
Use of non renewable primary energy resources used as raw materials (PENRM)	MJ, net calorific value	3,61E+01	0,00E+00	4,48E-02	0,00E+00	-3,62E+01	0,00E+00	0,00E+00
Total use of non renewable primary energy resource (PENRT)	MJ, net calorific value	3,61E+01	0,00E+00	4,48E-02	0,00E+00	1,59E-01	3,63E+01	0,00E+00
Use of secondary material (SM)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Use of renewable secondary fuels (RSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non renewable secondary fuels (NRSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water (FW)	m3	2,61E-02	0,00E+00	4,67E-06	0,00E+00	1,12E-04	2,63E-02	0,00E+00
Environmental information describing waste categories								
Hazardous waste disposed (HWD)	kg	2,85E-05	0,00E+00	1,17E-07	0,00E+00	4,95E-07	2,92E-05	0,00E+00
Non hazardous waste disposed (NHWD)	kg	1,81E-01	0,00E+00	2,31E-03	0,00E+00	3,20E-01	5,02E-01	0,00E+00
Radioactive waste disposed (RWD)	kg	3,92E-05	0,00E+00	3,03E-07	0,00E+00	8,95E-07	4,04E-05	0,00E+00
Environmental information describing output flows								
Components for re-use (CRU)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling (MFR)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery (MER)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported electrical energy (EEE)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported thermal energy (EET)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content								
Biogenic carbon content in product	kg C	Not significant						
Biogenic carbon content in accompanying packaging	kg C	3,40E-02						

\* Disclaimer: The results of this environmental impact must be treated with caution due to the high uncertainties and limited experience with the indicator. .\*\* The indicator includes all greenhouse gases included in the total GWP, but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is therefore equal to the GWP indicator originally defined in EN 15804: 2012 + A1: 2013

## Trocellen Class ALU adhesive 12 mm

Table 9: Ecoprofile assessment according to declared unit

CATEGORY IMPACT	UM	A1-A3	C1	C2	C3	C4	TOTAL	D
Global Warming Potential - total	kg CO2 eq.	3,27E+00	0,00E+00	2,95E-03	0,00E+00	3,33E-01	3,61E+00	0,00E+00
Global Warming Potential - fossil fuels	kg CO2 eq.	3,23E+00	0,00E+00	2,94E-03	0,00E+00	3,38E-02	3,27E+00	0,00E+00
Global Warming Potential - biogenic	kg CO2 eq.	3,05E-02	0,00E+00	7,84E-06	0,00E+00	2,99E-01	3,30E-01	0,00E+00
Global Warming Potential - land use and land use change (	kg CO2 eq.	6,77E-03	0,00E+00	1,16E-06	0,00E+00	8,91E-06	6,78E-03	0,00E+00
Depletion potential of the stratospheric ozone layer	kg CFC-11 eq.	3,23E-07	0,00E+00	6,86E-10	0,00E+00	1,89E-09	3,25E-07	0,00E+00
Acidification potential, Accumulated Exceedance	mol H+ eq.	1,83E-02	0,00E+00	1,49E-05	0,00E+00	1,20E-04	1,85E-02	0,00E+00
Eutrophication potential - freshwater	kg P eq.	9,43E-04	0,00E+00	1,91E-07	0,00E+00	6,10E-06	9,50E-04	0,00E+00
Eutrophication potential - marine	kg N eq.	4,90E-03	0,00E+00	5,13E-06	0,00E+00	5,90E-04	5,49E-03	0,00E+00
Eutrophication potential - terrestrial	mol N eq.	3,16E-02	0,00E+00	5,61E-05	0,00E+00	4,48E-04	3,21E-02	0,00E+00
Photochemical ozone formation	kg NMVOC eq.	8,68E-03	0,00E+00	1,37E-05	0,00E+00	2,06E-04	8,90E-03	0,00E+00
Abiotic depletion potential - non-fossil resources*	kg Sb eq.	2,00E-05	0,00E+00	1,03E-08	0,00E+00	3,38E-08	2,00E-05	0,00E+00
Abiotic depletion potential - fossil resources*	MJ, net calorific value	4,52E+01	0,00E+00	4,39E-02	0,00E+00	1,52E-01	4,54E+01	0,00E+00
Water use*	m3 world eq. deprived	1,32E+00	0,00E+00	1,34E-04	0,00E+00	4,41E-03	1,32E+00	0,00E+00
Additional mandatory environmental impact indicators								
Global Warming Potential (GWP-GHG)**	kg CO2 eq.	3,15E+00	0,00E+00	2,14E-01	0,00E+00	2,14E-01	3,58E+00	0,00E+00
Additional voluntary environmental impact indicators								
Particulate Matter emissions	Disease incidence	1,79E-07	0,00E+00	9,33E-09	0,00E+00	9,33E-09	1,98E-07	0,00E+00
Ionizing radiation, human health	kBq U235 eq.	1,40E-01	0,00E+00	9,36E-04	0,00E+00	9,36E-04	1,42E-01	0,00E+00
Eco-toxicity - freshwater*	CTUe	2,19E+02	0,00E+00	3,86E+01	0,00E+00	3,86E+01	2,97E+02	0,00E+00
Human toxicity, cancer effect*	CTUh	5,83E-08	0,00E+00	2,17E-09	0,00E+00	2,17E-09	6,27E-08	0,00E+00
Human toxicity, non-cancer effects*	CTUh	2,83E-09	0,00E+00	3,85E-10	0,00E+00	3,85E-10	3,60E-09	0,00E+00
Land use*	dimensionless	7,28E+00	0,00E+00	2,36E-01	0,00E+00	2,36E-01	7,75E+00	0,00E+00
Indicators describing resource use								
Use of renewable primary energy as energy carrier (PERE)	MJ, net calorific value	2,61E+00	0,00E+00	4,58E-03	0,00E+00	6,31E-01	3,25E+00	0,00E+00
Use of renewable primary energy resources used as raw materials (PERM)	MJ, net calorific value	6,24E-01	0,00E+00	1,05E-03	0,00E+00	-6,25E-01	0,00E+00	0,00E+00
Total use of renewable primary energy (PERT)	MJ, net calorific value	3,23E+00	0,00E+00	5,63E-03	0,00E+00	5,63E-03	3,25E+00	0,00E+00
Use of non renewable primary energy as energy carrier (PENRE)	MJ, net calorific value	2,54E-03	0,00E+00	1,80E-05	0,00E+00	4,80E+01	4,80E+01	0,00E+00
Use of non renewable primary energy resources used as raw materials (PENRM)	MJ, net calorific value	4,77E+01	0,00E+00	1,59E-01	0,00E+00	-4,79E+01	0,00E+00	0,00E+00
Total use of non renewable primary energy resource (PENRT)	MJ, net calorific value	4,77E+01	0,00E+00	1,59E-01	0,00E+00	1,59E-01	4,80E+01	0,00E+00



Use of secondary material (SM)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels (RSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non renewable secondary fuels (NRSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water (FW)	m3	3,40E-02	0,00E+00	1,12E-04	0,00E+00	1,12E-04	3,42E-02	0,00E+00
Environmental information describing waste categories								
Hazardous waste disposed (HWD)	kg	5,03E-05	0,00E+00	4,95E-07	0,00E+00	4,95E-07	5,13E-05	0,00E+00
Non hazardous waste disposed (NHWD)	kg	4,35E-01	0,00E+00	3,20E-01	0,00E+00	3,20E-01	1,07E+00	0,00E+00
Radioactive waste disposed (RWD)	kg	6,30E-05	0,00E+00	8,95E-07	0,00E+00	8,95E-07	6,47E-05	0,00E+00
Environmental information describing output flows								
Components for re-use (CRU)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling (MFR)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery (MER)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported electrical energy (EEE)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported thermal energy (EET)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content								
Biogenic carbon content in product	kg C	Not significant						
Biogenic carbon content in accompanying packaging	kg C	6,70E-02						

\* Disclaimer: The results of this environmental impact must be treated with caution due to the high uncertainties and limited experience with the indicator. \*\* The indicator includes all greenhouse gases included in the total GWP, but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is therefore equal to the GWP indicator originally defined in EN 15804: 2012 + A1: 2013

## Trocellen Class ALU adhesive 20 mm

Table 10: Ecoprofile assessment according to declared unit

CATEGORY IMPACT	UM	A1-A3	C1	C2	C3	C4	TOTAL	D
Global Warming Potential - total	kg CO2 eq.	4,06E+00	0,00E+00	3,93E-03	0,00E+00	4,44E-01	4,51E+00	0,00E+00
Global Warming Potential - fossil fuels	kg CO2 eq.	4,01E+00	0,00E+00	3,92E-03	0,00E+00	4,50E-02	4,06E+00	0,00E+00
Global Warming Potential - biogenic	kg CO2 eq.	3,89E-02	0,00E+00	1,05E-05	0,00E+00	3,99E-01	4,38E-01	0,00E+00
Global Warming Potential - land use and land use change (	kg CO2 eq.	7,42E-03	0,00E+00	1,55E-06	0,00E+00	1,19E-05	7,43E-03	0,00E+00
Depletion potential of the stratospheric ozone layer	kg CFC-11 eq.	4,60E-07	0,00E+00	9,14E-10	0,00E+00	2,52E-09	4,64E-07	0,00E+00
Acidification potential, Accumulated Exceedance	mol H+ eq.	2,23E-02	0,00E+00	1,99E-05	0,00E+00	1,60E-04	2,24E-02	0,00E+00
Eutrophication potential - freshwater	kg P eq.	1,14E-03	0,00E+00	2,55E-07	0,00E+00	8,14E-06	1,15E-03	0,00E+00
Eutrophication potential - marine	kg N eq.	6,78E-03	0,00E+00	6,84E-06	0,00E+00	7,86E-04	7,57E-03	0,00E+00
Eutrophication potential - terrestrial	mol N eq.	3,90E-02	0,00E+00	7,48E-05	0,00E+00	5,97E-04	3,97E-02	0,00E+00
Photochemical ozone formation	kg NMVOC eq.	1,06E-02	0,00E+00	1,82E-05	0,00E+00	2,75E-04	1,09E-02	0,00E+00
Abiotic depletion potential - non-fossil resources*	kg Sb eq.	3,08E-05	0,00E+00	1,37E-08	0,00E+00	4,50E-08	3,08E-05	0,00E+00
Abiotic depletion potential - fossil resources*	MJ, net calorific value	5,85E+01	0,00E+00	5,85E-02	0,00E+00	2,02E-01	5,87E+01	0,00E+00
Water use*	m3 world eq. deprived	1,85E+00	0,00E+00	1,79E-04	0,00E+00	5,88E-03	1,85E+00	0,00E+00
Additional mandatory environmental impact indicators								0,00E+00
Global Warming Potential (GWP-GHG)**	kg CO2 eq.	3,91E+00	0,00E+00	3,89E-03	0,00E+00	2,85E-01	4,20E+00	0,00E+00
Additional voluntary environmental impact indicators								0,00E+00
Particulate Matter emissions	Disease incidence	2,09E-07	0,00E+00	2,82E-10	0,00E+00	1,24E-08	2,21E-07	0,00E+00
Ionizing radiation, human health	kBq U235 eq.	1,89E-01	0,00E+00	3,07E-04	0,00E+00	1,25E-03	1,90E-01	0,00E+00
Eco-toxicity - freshwater*	CTUe	3,35E+02	0,00E+00	4,66E-02	0,00E+00	5,15E+01	3,86E+02	0,00E+00
Human toxicity, cancer effect*	CTUh	7,21E-08	0,00E+00	4,87E-11	0,00E+00	2,90E-09	7,50E-08	0,00E+00
Human toxicity, non-cancer effects*	CTUh	3,44E-09	0,00E+00	1,51E-12	0,00E+00	5,13E-10	3,96E-09	0,00E+00

Land use*	dimensionless	9,43E+00	0,00E+00	4,10E-02	0,00E+00	3,15E-01	9,78E+00	0,00E+00
Indicators describing resource use								
Use of renewable primary energy as energy carrier (PERE)	MJ, net calorific value	3,02E+00	0,00E+00	6,32E-04	0,00E+00	8,48E-01	3,87E+00	0,00E+00
Use of renewable primary energy resources used as raw materials (PERM)	MJ, net calorific value	8,41E-01	0,00E+00	2,10E-04	0,00E+00	-8,41E-01	0,00E+00	0,00E+00
Total use of renewable primary energy (PERT)	MJ, net calorific value	3,86E+00	0,00E+00	8,42E-04	0,00E+00	7,51E-03	3,87E+00	0,00E+00
Use of non renewable primary energy as energy carrier (PENRE)	MJ, net calorific value	3,67E-03	0,00E+00	2,48E-06	0,00E+00	6,21E+01	6,21E+01	0,00E+00
Use of non renewable primary energy resources used as raw materials (PENRM)	MJ, net calorific value	6,18E+01	0,00E+00	5,97E-02	0,00E+00	-6,19E+01	0,00E+00	0,00E+00
Total use of non renewable primary energy resource (PENRT)	MJ, net calorific value	6,18E+01	0,00E+00	5,97E-02	0,00E+00	2,12E-01	6,21E+01	0,00E+00
Use of secondary material (SM)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels (RSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non renewable secondary fuels (NRSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water (FW)	m3	4,64E-02	0,00E+00	6,23E-06	0,00E+00	1,49E-04	4,66E-02	0,00E+00
Environmental information describing waste categories								
Hazardous waste disposed (HWD)	kg	6,31E-05	0,00E+00	1,56E-07	0,00E+00	6,59E-07	6,39E-05	0,00E+00
Non hazardous waste disposed (NHWD)	kg	5,15E-01	0,00E+00	3,07E-03	0,00E+00	4,26E-01	9,44E-01	0,00E+00
Radioactive waste disposed (RWD)	kg	8,23E-05	0,00E+00	4,04E-07	0,00E+00	1,19E-06	8,39E-05	0,00E+00
Environmental information describing output flows								
Components for re-use (CRU)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling (MFR)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery (MER)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported electrical energy (EEE)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported thermal energy (EET)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content								
Biogenic carbon content in product	kg C	Not significant						
Biogenic carbon content in accompanying packaging	kg C	7,17E-02						

\* Disclaimer: The results of this environmental impact must be treated with caution due to the high uncertainties and limited experience with the indicator. .\*\* The indicator includes all greenhouse gases included in the total GWP, but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is therefore equal to the GWP indicator originally defined in EN 15804: 2012 + A1: 2013

## Trocellen Class ALU.S adhesive 16 mm

Table 11: Ecoprofile assessment according to declared unit

CATEGORY IMPACT	UM	A1-A3	C1	C2	C3	C4	TOTAL	D
Global Warming Potential - total	kg CO2 eq.	6,10E+00	0,00E+00	4,91E-03	0,00E+00	5,55E-01	6,66E+00	0,00E+00
Global Warming Potential - fossil fuels	kg CO2 eq.	6,04E+00	0,00E+00	4,90E-03	0,00E+00	5,63E-02	6,10E+00	0,00E+00
Global Warming Potential - biogenic	kg CO2 eq.	5,29E-02	0,00E+00	1,31E-05	0,00E+00	4,99E-01	5,52E-01	0,00E+00
Global Warming Potential - land use and land use change (	kg CO2 eq.	1,39E-02	0,00E+00	1,94E-06	0,00E+00	1,49E-05	1,40E-02	0,00E+00
Depletion potential of the stratospheric ozone layer	kg CFC-11 eq.	5,50E-07	0,00E+00	1,14E-09	0,00E+00	3,15E-09	5,54E-07	0,00E+00
Acidification potential, Accumulated Exceedance	mol H+ eq.	3,51E-02	0,00E+00	1,99E-04	0,00E+00	1,99E-04	3,55E-02	0,00E+00
Eutrophication potential - freshwater	kg P eq.	1,85E-03	0,00E+00	3,18E-07	0,00E+00	1,02E-05	1,86E-03	0,00E+00
Eutrophication potential - marine	kg N eq.	8,76E-03	0,00E+00	8,55E-06	0,00E+00	9,83E-04	9,75E-03	0,00E+00
Eutrophication potential - terrestrial	mol N eq.	5,96E-02	0,00E+00	9,35E-05	0,00E+00	7,46E-04	6,04E-02	0,00E+00
Photochemical ozone formation	kg NMVOC eq.	1,64E-02	0,00E+00	2,28E-05	0,00E+00	3,44E-04	1,68E-02	0,00E+00
Abiotic depletion potential - non-fossil resources*	kg Sb eq.	3,33E-05	0,00E+00	1,72E-08	0,00E+00	5,63E-08	3,34E-05	0,00E+00
Abiotic depletion potential - fossil resources*	MJ, net calorific value	7,81E+01	0,00E+00	7,31E-02	0,00E+00	2,53E-01	7,84E+01	0,00E+00
Water use*	m3 world eq. deprived	2,20E+00	0,00E+00	2,24E-04	0,00E+00	7,35E-03	2,21E+00	0,00E+00
Additional mandatory environmental impact indicators								
Global Warming Potential (GWP-GHG)**	kg CO2 eq.	5,88E+00	0,00E+00	4,86E-03	0,00E+00	3,56E-01	6,24E+00	0,00E+00
Additional voluntary environmental impact indicators								
Particulate Matter emissions	Disease incidence	3,50E-07	0,00E+00	3,53E-10	0,00E+00	1,55E-08	3,66E-07	0,00E+00
Ionizing radiation, human health	kBq U235 eq.	2,51E-01	0,00E+00	3,84E-04	0,00E+00	1,56E-03	2,53E-01	0,00E+00
Eco-toxicity - freshwater*	CTUe	3,74E+02	0,00E+00	5,83E-02	0,00E+00	6,44E+01	4,38E+02	0,00E+00
Human toxicity, cancer effect*	CTUh	1,13E-07	0,00E+00	6,09E-11	0,00E+00	3,62E-09	1,17E-07	0,00E+00
Human toxicity, non-cancer effects*	CTUh	5,54E-09	0,00E+00	1,89E-12	0,00E+00	6,41E-10	6,18E-09	0,00E+00
Land use*	dimensionless	1,31E+01	0,00E+00	5,13E-02	0,00E+00	3,93E-01	1,35E+01	0,00E+00

Indicators describing resource use								
Use of renewable primary energy as energy carrier (PERE)	MJ, net calorific value	5,22E+00	0,00E+00	7,90E-04	0,00E+00	1,06E+00	6,28E+00	0,00E+00
Use of renewable primary energy resources used as raw materials (PERM)	MJ, net calorific value	1,05E+00	0,00E+00	2,63E-04	0,00E+00	-1,05E+00	0,00E+00	0,00E+00
Total use of renewable primary energy (PERT)	MJ, net calorific value	6,27E+00	0,00E+00	1,05E-03	0,00E+00	9,38E-03	6,28E+00	0,00E+00
Use of non renewable primary energy as energy carrier (PENRE)	MJ, net calorific value	4,04E-03	0,00E+00	3,10E-06	0,00E+00	8,27E+01	8,27E+01	0,00E+00
Use of non renewable primary energy resources used as raw materials (PENRM)	MJ, net calorific value	8,24E+01	0,00E+00	7,47E-02	0,00E+00	-8,24E+01	0,00E+00	0,00E+00
Total use of non renewable primary energy resource (PENRT)	MJ, net calorific value	8,24E+01	0,00E+00	7,47E-02	0,00E+00	2,66E-01	8,27E+01	0,00E+00
Use of secondary material (SM)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels (RSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non renewable secondary fuels (NRSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water (FW)	m3	5,86E-02	0,00E+00	7,79E-06	0,00E+00	1,86E-04	5,88E-02	0,00E+00
Environmental information describing waste categories								
Hazardous waste disposed (HWD)	kg	9,35E-05	0,00E+00	1,95E-07	0,00E+00	8,24E-07	9,45E-05	0,00E+00
Non hazardous waste disposed (NHWD)	kg	8,48E-01	0,00E+00	3,84E-03	0,00E+00	5,33E-01	1,38E+00	0,00E+00
Radioactive waste disposed (RWD)	kg	1,15E-04	0,00E+00	5,05E-07	0,00E+00	1,49E-06	1,17E-04	0,00E+00
Environmental information describing output flows								
Components for re-use (CRU)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling (MFR)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery (MER)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported electrical energy (EEE)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported thermal energy (EET)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content								
Biogenic carbon content in product	kg C	Not significant						
Biogenic carbon content in accompanying packaging	kg C	5,18E-02						

\* Disclaimer: The results of this environmental impact must be treated with caution due to the high uncertainties and limited experience with the indicator. .\*\* The indicator includes all greenhouse gases included in the total GWP, but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is therefore equal to the GWP indicator originally defined in EN 15804: 2012 + A1: 2013

## 5 ADDITIONAL ENVIRONMENTAL INFORMATION

### **REACH Declaration:**

None of the substances on the current version of the Candidate List of European Regulation 1907/2006/EC (REACH Registration, Evaluation, Authorisation and Restriction of Chemicals) is present in concentrations higher than 0.1% by weight in the mentioned articles.

### **CAM Compliance:**

Trocellen Class product range are in compliance with CAM ("Criteri ambientali minimi" – Minimum environmental criteria) for construction according to Italian Law D.M. 11 Ottobre 2017 (<https://insulation.trocellen.com/cam/> ).

### **LEED and WELL sustainability protocols:**

Trocellen class product can support the achievement of LEED (Green Building council) and WELL (WELL building institute) sustainability certifications for buildings (<https://insulation.trocellen.com/leed-well/> ).

## 6 REFERENCES

PCR 2019:14: "Construction products" version 1.11

SUB PCR: c-PCR-005 Thermal Insulation products (EN 16783)

EN 15804 – Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products

EN ISO 14025:2010 – Environmental labels and declarations - Type III environmental declarations - Principles and procedures

EN ISO 14040:2006 – Environmental management — Life cycle assessment — Principles and framework


EN ISO 14044:2018 – Environmental management — Life cycle assessment — Requirements and guidelines

GENERAL PROGRAMME INSTRUCTIONS FOR THE INTERNATIONAL EPD® SYSTEM VERSION 3.01 (2019-09-18)

Report LCA\_TROCELLEN Rinnovo 2022 rev 02 – Date: 20/04/2023. Authors: Qualitynet srl in collaboration with EcamricertSrl.

## PROGRAMME INFORMATION

<b>Programme:</b>	<p>The International EPD® System</p> <p>EPD International AB Box 210 60 SE-100 31 Stockholm Sweden</p> <p><a href="http://www.environdec.com">www.environdec.com</a> <a href="mailto:info@environdec.com">info@environdec.com</a></p>
-------------------	---

<p><b>ISO standard 21930 and CEN standard EN 15804 serve as main rules for product category (PCR)</b></p>
<p><b>Product category rules (PCR):</b> PCR 2019:14: "Construction products" version 1.11 <b>SUB PCR:</b> c-PCR-005 Thermal Insulation products (EN 16783)</p>
<p><b>PCR review was conducted by:</b> The Technical Committee of the International EPD® System. Review chair: Claudia A. Peña, University of Concepción, Chile. Review chair may be contacted on <a href="http://www.environdec.com/contact">www.environdec.com/contact</a>.</p>
<p><b>EPD registration number:</b> S-P-04708</p>
<p><b>Independent third-party verification of the declaration and data, according to ISO 14025:2006</b></p> <p><input checked="" type="checkbox"/> External    <input type="checkbox"/> Internal <input type="checkbox"/> EPD process certification    <input checked="" type="checkbox"/> EPD verification</p>
<p><b>Third party verifier:</b> &lt; DNV GL - Business Assurance &gt; </p>
<p><b>Procedure for follow-up of data during EPD validity involves third party verifier:</b></p> <p><input checked="" type="checkbox"/> Yes    <input type="checkbox"/> No</p>

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.



<p><b>EPD Owner</b></p>	<p>Trocellen Italia Spa</p>		<p><a href="https://trocellen.com/it/">https://trocellen.com/it/</a>  <b>Contact:</b>  <b>info@trocellen.com</b></p>
<p><b>Technical support</b></p>	<p><b>QUALITYNET SRL</b>          In collaboration with  <b>EcamRicert Srl</b></p>	 <i>Esperti in Certificazioni</i>  	<p><a href="https://www.quality-net.it/">https://www.quality-net.it/</a>   <a href="https://ecamricert.com/">https://ecamricert.com/</a></p>