Environmental Product Declaration





In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Burnt Wood from

Yakiwood UAB

YAKIWOOD

Programme:

The International EPD® System, www.environdec.com

Programme operator:

EPD International AB

EPD registration number:


S-P-10564

Publication date:

2023-09-26

Valid until: 2028-09-25

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com

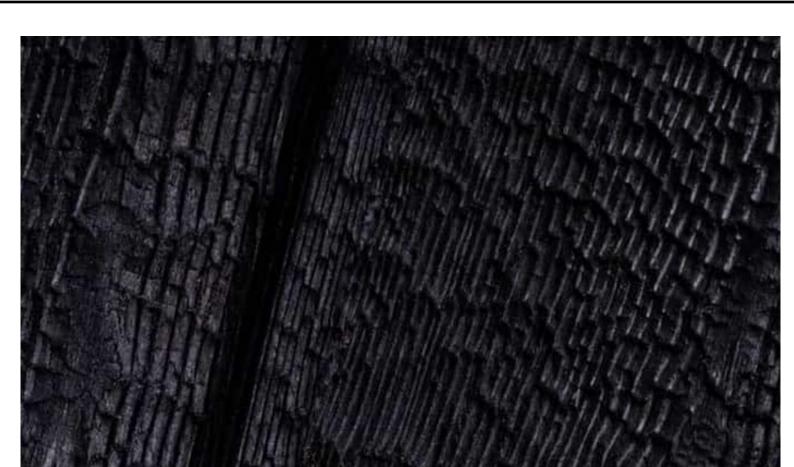





General information

Programme information

Programme:	The International EPD® System						
	EPD International AB						
A data on .	Box 210 60						
Address:	SE-100 31 Stockholm						
	Sweden						
Website:	www.environdec.com						
E-mail:	info@environdec.com						

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR)
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product Category Rules (PCR): PCR 2019:14 Construction products (EN 15804:A2) (1.3.1) and UN CPC 316 – Builders' joinery and carpentry of wood
PCR review was conducted by: IVL Swedish Environmental Research Institute Secretariat of the International EPD® System
Life Cycle Assessment (LCA)
LCA accountability: Dr. Ing. Kaspars Zudrags BM Certification
Third-party verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:
⊠ EPD verification by individual verifier
Third-party verifier: Prof. Vladimír Kočí, PhD, LCA Studio, Czech Republic
Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier:
□ Yes ⊠ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.





Company information

Owner of the EPD: Yakiwood UAB

Contact: info@yakiwood.eu

<u>Description of the organisation</u>: We are experts in the preparation of burnt wood, with many years of successful experience in preparing wood for facades, terraces, fences and interiors, and we guarantee a high quality and long-lasting result. Our aim is to help you create a cosy and sustainable environment using a natural, time-tested woodworking method. More information www.yakiwood.eu

<u>Product-related or management system-related certifications:</u> FSC standard ESC-STD-40-004 certificate code: FSC-COC-009447 trademark license code FSC-C183327.

Name and location of production site(s): Neries g. 4, Kauno raj., Lithuania

Product information

Product name: Burnt wood.

<u>Product description:</u> Production defect free, ready profiled boards burnt, brushed and oiled. moisture is about 15%.







UN CPC code: 316 - Builders' joinery and carpentry of wood

Geographical scope: Europe

LCA information

Functional unit / declared unit: 1m³ of burnt wood (average density 470kg/m³).


Reference service life: 20 years.

<u>Time representativeness:</u> Data for calculation were collected by Yakiwood UAB and cover period of 12 months 2022.01.01-2022.12.31.

Database(s) and LCA software used: One Click LCA, Ecoinvent 3.8.

<u>Description of system boundaries:</u> Cradle to gate with modules C1–C4 and module D (A1–A3 + C + D)



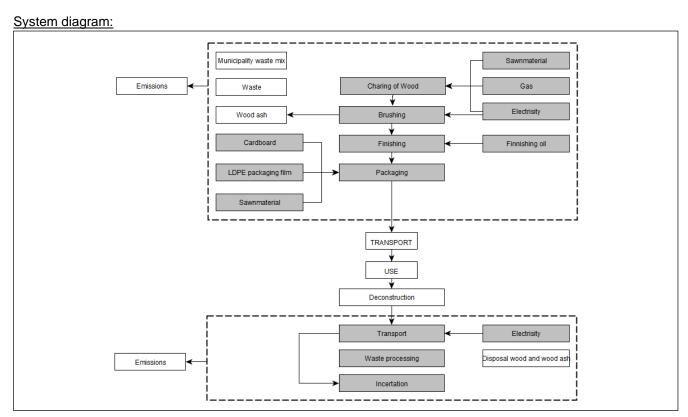

More information: Inputs and outputs are recorded. Totally 97,8% of all inputs are included in the calculation excluding just ancillary materials. The volume of excluded materials is in line of the standard. The ancillary materials have been cut-off due to insufficient and minor influence of data. The following key assumptions and estimates for LCA modelling have been used: The EURO 5 (50%) and EURO 6 (50%) class trucks have been considered as used for input raw material transportation.

Modulus C1 Deconstruction is considered as insufficient and minor influence of data.

Modulus C2 Transport to the incarnation plant is considered as 100km.

Modulus D The wood is assumed that 90% is collected of the wood is treated in incarnation plant.





Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage Construction process stage			Use stage				End of life stage			Resource recovery stage						
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling- potential
Module	A 1	A2	А3	A4	A5	B1	B2	В3	B4	В5	В6	B7	C1	C2	C3	C4	D
Modules declared	Х	Х	Х	ND	ND	ND	ND	ND	ND	ND	ND	ND	Х	Х	Х	Х	Х
Geography	Europe		-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Specific data used	> 80%		-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Variation – products	3%		-	-	-	-	-	-	i	1	-	-	-	-	-	-	
Variation – sites	-		-	-	ı	-	-	-	i	ı	-	ı	-	-	-	-	

X – included, ND – Module Not Declared.





Content information

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Wood	446.5	-	100%, 0.45 C/kg
Wood Charcoal	23.5	-	100%
Waterbase oil	8	-	-
TOTAL	478		
Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Cardboard	0.02	-	-
Packaging PP film	0.52	-	-
Slats wooden	1.30	-	100%, 0.45 C/kg
TOTAL	1.84		

No dangerous substances from the candidate list of SVHC for Authorisation





Results of the environmental performance indicators

Mandatory impact category indicators according to EN 15804:2012+A2:2019

Indicator	Unit	A1-A3	C1	C2	C3	C4	D	
GWP-total	kg CO ₂ eq.	-6.59E+02	0.00E+00	4.49E+00	3.57E+00	-6.45E+01	-3.28E+02	
GWP-fossil	kg CO ₂ eq.	1.17E+02	0.00E+00	4.49E+00	3.54E+00	7.70E-01	4.45E+03	
GWP-biogenic	kg CO ₂ eq.	-7.87E+02	0.00E+00	1.70E-03	2.20E-02	-6.53E+01	3.58E+07	
GWP-luluc	kg CO ₂ eq.	1.07E+01	0.00E+00	1.70E-03	8.00E-03	7.50E-04	4.11E+02	
ODP	kg CFC 11 eq.	3.86E-05	0.00E+00	1.00E-06	1.80E-07	2.20E-07	1.59E-01	
AP	mol H ⁺ eq.	1.21E+00	0.00E+00	1.90E-02	1.90E-02	6.80E-03	1.23E+05	
EP-freshwater	kg P eq.	1.30E-02	0.00E+00	3.70E-05	3.60E-04	4.20E-03	2.13E+05	
EP-marine	kg N eq.	2.52E-01	0.00E+00	5.60E-03	2.70E-03	3.50E-03	3.92E-01	
EP-terrestrial	mol N eq.	2.44E+00	0.00E+00	6.20E-02	3.00E-02	2.30E-02	-3.47E+00	
POCP	kg NMVOC eq.	9.35E-01	0.00E+00	2.00E-02	8.50E-03	7.80E-03	1.29E+01	
ADP-minerals&metals*	kg Sb eq.	5.54E-04	0.00E+00	1.10E-05	9.80E-06	2.80E-06	5.13E-03	
ADP-fossil*	MJ	3.04E+03	0.00E+00	6.74E+01	7.36E+01	1.66E+01	4.84E+04	
WDP*	m^3	6.33E+01	0.00E+00	3.00E-01	1.98E+00	2.70E-01	-1.18E+05	
GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption								

^{*} Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.





Additional mandatory and voluntary impact category indicators

Results per functional or declared unit										
Indicator	Unit	A1-A3	C1	C2	C3	C4	D			
GWP-GHG ¹	kg CO ₂ eq.	1.17E+02	0.00E+00	4.49E+00	3.54E+00	7.70E-01	-3.26E+02			

Resource use indicators

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
PERE	MJ	9.56E+03	0.00E+00	7.60E-01	6.61E+03	3.40E-01	2.28E+11
PERM	MJ	5.91E+03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	1.55E+04	0.00E+00	7.60E-01	6.61E+03	3.40E-01	2.66E+08
PENRE	MJ	1.68E+03	0.00E+00	6.74E+01	7.35E+01	1.66E+01	5.54E+07
PENRM	MJ	1.42E+03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	3.10E+03	0.00E+00	6.74E+01	7.35E+01	1.66E+01	1.74E+07
SM	kg	1.94E+00	0.00E+00	1.90E-02	2.80E-02	8.00E-03	0.00E+00
RSF	MJ	4.03E-02	0.00E+00	1.90E-04	4.50E-05	2.40E-04	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m³	1.43E+00	0.00E+00	8.70E-03	6.20E-02	1.50E-02	-8.07E-01
	DEDE - LICO O	f rangwahla primary	onoray oveluding r	anowahla primary o	noray recourees use	ad ac raw materiale.	DEDM - Use of

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

¹ This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.





Waste indicators

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
Hazardous waste disposed	kg	1.03E+01	0.00E+00	8.90E-02	0.00E+00	1.30E-02	-2.51E+01
Non-hazardous waste disposed	kg	2.77E+02	0.00E+00	1.47E+00	0.00E+00	6.95E+01	2.85E+03
Radioactive waste disposed	kg	1.89E-02	0.00E+00	4.50E-04	0.00E+00	2.30E-05	1.41E-02

Output flow indicators

Indicator	Unit	A1-A3	C1	C2	С3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	5,20E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	4,30E+02	0,00E+00	-4,30E+02
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	6,53E+02	0,00E+00	6,53E+02
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	3,68E+03	0,00E+00	3,68E+03

Т





References

General Programme Instructions of the International EPD® System. Version 4.0.

PCR 2019:14 Construction products (EN 15804:A2) (1.3.1)

Yakiwood LCA background report 11.09.2023

ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations. Principles and procedures.

ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.

ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines.

EN 15804:2012+A2:2019 Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products

EN 16449:2014 Wood and wood-based products - Calculation of the biogenic carbon content of wood and conversion to carbon dioxide

