

Environmental Product Declaration





In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

BALL VALVE AVI 1333, a-collection

from

Ahlsell AB



Programme
Programme operator
EPD registration number
Publication date
Revision date
Valid until

EPD International AB
The International EPD® System
EPD IES 0016425
2024 09 15
2025 01 14

2029 09 14

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com

This EPD covers multiple products and is based on the results of the representative product.







General Information

Programme information							
Programme	The International EPD® System						
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden						
Website	www.environdec.com						
E-mail	info@environdec.com						

Accountabilities fo	Accountabilities for PCR, LCA and independent, third-party verification								
Product Category	Construction products (EN 15804:A2)								
Rules (PCR)	PCR 2019:14 Construction products (EN 15804:A2) (1.3.4)								
Life Cycle Assessment (LCA)	Carbonzero AB								
	Independent third-party verification of the declaration and data, according to ISO 14025:2006:								
Thind or other	EPD process certification								
Third-party verification:	Vladimír Kocí, LCA Studio								
vermoddon.	CA Studio Los								
	Approved by: The International EPD® System								
Procedure for follow	v-up of data during EPD validity involves third party verifier: ☐ Yes ✓ No								

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.





Company informati	Company information								
Owner of the EPD	er of the EPD Ahlsell AB								
Contact	Ekatherine Lagovardos								
Description of the organisation	Ahlsell AB is present where people reside, work, and live their lives. Ahlsell AB is currently the Nordic region's leading community-building distributor of installation products, tools, and supplies for installation, construction, real estate management, industrial and power companies, and the public sector. With around 7,500 employees, 300 stores, e-commerce, and four central warehouses, we are working daily to achieve our vision of building a more sustainable society.								
Product-related or management system-related certifications:	ISO 9001 & ISO 14001								
Name and location of production site(s):	Name of plant: Hallsberg Location: Sweden								

Product information								
Product name(s)	FEMALE THREAD HIGH NECK PN25 G1 1/2"							
Product description:	For heating/cooling systems, diesel, glycol, neutral liquids, other media that do not attack the materials included in the valve. In brass CW617N, and full bore. Valve seat PTFE, stem seal HNBR.							
RSL	10 years							
UN CPC code	415 - Semi-finished products of copper							

LCA information	
Functional unit / declared unit	1 kg of product
Time representative-ness	Data obtained refers to the year 2023
System Boundary	The system boundaries are set to be "cradle-to-gate" with modules A4, C1-C4 + D for end of life.
Database(s) and LCA software used	Eando X version 1.01



D

Benefits

THE INTERNATIONAL EPD® SYSTEM

					INE INTERN	ATIONAL E	PD SYSTEM			
Syst	tem diagran	n								
	A1	A2	A3	A4	A5	B1-7	C1-4			
pr	Extraction and processing of raw materials		Manufact- uring	Transport to end user	Installation on site	User	End of life			
			<u>F</u>			_ي کي _	EOL ♣			
			Waste		Waste		Waste			
This module considers the extraction and processing of all raw materials, ener and transportation which occur upstream to the studied manufacturing process including packaging material.										
A1	Raw mate	erial supply	and transportatio	n which occur u	·	-				
A2	Transport manufact		Γhe raw material	s are transporte	s are transported to the manufacturing site.					
A3	Manufact		This module incluncture includes additive			ce and waste p	roduced. This als			
A4	Transport		Transportation fro distribution centr				and then from the			
	Transport	: Scenario t	ruck: 350km							
A5	Construct installatio		This stage is not that leaves the s			-				
31- B7	Use stage	e	Γhis stage is not	declared.						
C1	Deconstru olition	uction/Dem r	This stage includ not relevant as th process.				building. This is he construction			
C2	Transport		This stage repres	sents the transpo	ort distance to th	e waste proces	ssing facility.			
00	Waste pro	ocessing	This stage includes any waste treatment needed.							
			Landfill 9.89%. Incineration 0.49%. Recycling 89.61%.							
C3	EOL Scen	ario l	_andfill 9.89%. In	cineration 0.499	%. Recycling 89.	61%.				

^{*} If purchased electricity used in the manufacturing process of module A3 accounts for more than 30% of the GWP-GHG results of modules A1-A3, the EPD shall declare the energy source behind the purchased electricity and its climate impact as kg CO2 eq./kWh. This information can be found in the end of the EPD.

Emission credits obtained from energy recovery and/or recycling materials





Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Prod	oduct stage Assembly stage				Use stage						End of life stage				Benefits & loads beoyond system boundary	
	Raw Materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery - Recycling-potential
	A1	A2	АЗ	A4	A5*	В1	В2	ВЗ	В4	B5	В6	В7	C1	C2	C3	C4	D
Declared	Χ	Χ	X	X	Χ	ND	ND	ND	ND	ND	ND	ND	Χ	X	Χ	X	X
Geography	CN	GLO	SE	EU	EU	-	-	-	-	-	-	-	EU	EU	EU	EU	EU
Specific data used	>90%		-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Variation- Products	<10%		-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Variation- Sites		0%	b	-	-	-	-	-	-	-	-	-	-	-	-	-	-

ND – Not Declared; X – Declared

Reading example: $9.0E-03 = 9.0*10^3 = 0.009$

^{*} Module A5 is only partially declared, GWP biogenic arising due to packaging material in A1-A3 stages are balanced in A5 where it exits the product system boundary.





Content Information

Product Components	Weight, kg	Post- consumer material, weight-%	Biogenic material, weight- % and kg C/kg
Rubber	8.44e-4	0.000	0.000
Metal	0.989	0.000	0.000
Plastic	0.010	0.000	0.000
Total	1.000	0.000	0.000

Packaging Materials	Weight, kg	Weight- % (versus the product)	Weight biogenic carbon, kg C/kg		
Packaging Paper	1.46e-8	1.46e-6	6.05e-9		
LDPE	0.005	0.466	0.000		
Carton	0.126	12.569	0.000		
Total	0.130	13.034	6.05e-9		

Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight- % per functional or declared unit
-	-	-	0.000

At the date of issue of this declaration, there is no "Substance of Very High Concern" (SVHC) in concentration above 0.1% by weight, and neither does the packaging, following the European REACH regulation (Registration, Evaluation, Authorization and Restriction of Chemicals)





Environmental Information

Potential environmental impact – indicators according to EN 15804+A2

	Results per functional unit: 1 kg										
Indicator		Unit	A1 - A3	A4	A5	C1	C2	C3	C4	D	
GWP-total		kg CO2 eq	6.32e+0	4.06e-2	1.46e-1	0.00e+0	3.60e-3	-1.62e-2	4.63e-3	-4.01e+0	
GWP-fossil		kg CO2 eq	6.42e+0	3.98e-2	ND	0.00e+0	3.53e-3	1.49e-2	4.63e-3	-4.01e+0	
GWP-biogenic		kg CO2 eq	-1.14e-1	9.61e-5	1.46e-1	0.00e+0	8.52e-6	-3.11e-2	0.00e+0	4.87e-6	
GWP-luluc		kg CO2 eq	1.44e-2	6.77e-4	ND	0.00e+0	6.00e-5	1.03e-7	4.70e-6	-8.00e-3	
ODP		kg CFC-11 eq	8.42e-8	5.91e-15	ND	0.00e+0	5.24e-16	1.49e-15	7.62e-15	-4.82e-8	
AP		mole H+ eq	3.77e-1	2.55e-4	ND	0.00e+0	2.26e-5	1.62e-6	1.48e-5	-2.46e-1	
EP-freshwater*		kg P eq	2.95e-2	1.71e-7	ND	0.00e+0	1.52e-8	4.00e-10	4.18e-9	-1.93e-2	
EP-marine		kg N eq	2.09e-2	1.25e-4	ND	0.00e+0	1.11e-5	3.69e-7	3.73e-6	-1.33e-2	
EP-terrestrial		mole N eq	2.78e-1	1.38e-3	ND	0.00e+0	1.22e-4	7.50e-6	4.09e-5	-1.79e-1	
POCP		kg NMVOC eq	7.88e-2	2.47e-4	ND	0.00e+0	2.19e-5	1.09e-6	1.17e-5	-5.10e-2	
ADP-minerals & m	netals**	kg Sb eq	5.10e-3	3.50e-9	ND	0.00e+0	3.10e-10	1.34e-11	1.27e-10	-3.35e-3	
ADP-fossil**		MJ	9.43e+1	5.28e-1	ND	0.00e+0	4.68e-2	3.50e-3	6.91e-2	-5.85e+1	
WDP**		m3	6.80e+0	6.23e-4	ND	0.00e+0	5.52e-5	1.39e-3	-6.28e-5	-4.38e+0	
Acronyms	Global W = Acid reaching compo	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption									

^{*} The results in kg PO4 eq. can be obtained by multiplying the results in kg P eq. by a factor of 3,07.

^{**} The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.





Use of resources

Results per functional unit: 1 kg											
Indicator	Unit	A1 - A3	A4	A5	C1	C2	C3	C4	D		
PERE	MJ	1.88e+1	4.56e-2	ND	0.00e+0	4.04e-3	8.54e-4	6.21e-3	-1.27e+1		
PERM	MJ	2.14e+0	0.00e+0	ND	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0		
PERT	MJ	2.09e+1	4.56e-2	ND	0.00e+0	4.04e-3	8.54e-4	6.21e-3	-1.27e+1		
PENRE	MJ	5.29e-1	0.00e+0	ND	0.00e+0	0.00e+0	3.50e-3	6.91e-2	-4.20e-2		
PENRM	MJ	3.52e-1	0.00e+0	ND	0.00e+0	0.00e+0	-7.55e-2	-6.17e-2	7.32e-3		
PENRT	MJ	8.81e-1	0.00e+0	ND	0.00e+0	0.00e+0	-7.20e-2	7.39e-3	-3.46e-2		
SM	kg	1.89e-1	0.00e+0	ND	0.00e+0	0.00e+0	0.00e+0	0.00e+0	9.32e-1		
RSF	MJ	3.72e+1	0.00e+0	ND	0.00e+0	0.00e+0	0.00e+0	0.00e+0	-3.01e+1		
NRSF	MJ	0.00e+0	0.00e+0	ND	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0		
FW	m3	1.30e-1	5.10e-5	ND	0.00e+0	4.52e-6	3.26e-5	7.78e-7	-1.02e-1		
Acronyms	m3 1.30e-1 5.10e-5 ND 0.00e+0 4.52e-6 3.26e-5 7.78e-7 -1.02e-1 PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water										





Additional voluntary indicators

Results per functional unit: 1 kg									
Indicator	Unit	Unit A1 - A3 A4 A5 C1 C2 C3 C4 D							D
GWP-GHG	kg CO2 eq	5.01e+0	3.77e-5	ND	0.00e+0	3.34e-6	1.49e-2	4.47e-3	-3.98e+0
EP	kg PO4 eq	8.01e-2	4.26e-8	ND	0.00e+0	3.78e-9	2.20e-7	1.31e-6	-6.48e-2
Acronyms	GWP-GHG global warming potential - greenhouse gases; EP eutrophication potential								

The GWP-GHG indicator is identical to GWP-total except that the characterisation factor (CF) for biogenic CO2 is set to zero. This means that the uptake and emissions of biogenic CO2 are "balanced out" already in modules A1-A3, instead of in modules A1-A5 (for packaging) or modules A-C (for product). In the context of Norwegian public procurement legislation, GWP-GHG is also referred to as GWP-IOBC.

Waste and output flows

Results per functional unit: 1 kg										
Indicator	Unit	A1 - A3	A4	A5	C1	C2	C3	C4	D	
HWD	kg	1.77e-9	2.03e-11	ND	0.00e+0	1.80e-12	4.32e-14	5.71e-12	-4.91e-10	
NHWD	kg	3.83e+0	8.62e-5	ND	0.00e+0	7.64e-6	5.54e-4	9.89e-2	-3.06e+0	
RWD	kg	3.36e-4	9.65e-7	ND	0.00e+0	8.56e-8	1.50e-7	8.04e-7	-1.21e-4	
Acronyms	HW Ho	HW Hazardous waste disposed; NHW Non-hazardous waste disposed; RW Radioactive waste disposed								





Output flows

Results per functional unit: 1 kg									
Indicator	Unit	A1 - A3	A4	A5	C1	C2	C3	C4	D
CRU	kg	3.72e+1	0.00e+0	ND	0.00e+0	0.00e+0	0.00e+0	0.00e+0	-3.01e+1
MFR	kg	0.00e+0	0.00e+0	ND	0.00e+0	0.00e+0	8.96e-1	0.00e+0	0.00e+0
MER	kg	0.00e+0	0.00e+0	ND	0.00e+0	0.00e+0	4.99e-3	0.00e+0	0.00e+0
EEE	MJ	0.00e+0	0.00e+0	ND	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
EET	MJ	0.00e+0	0.00e+0	ND	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Acronyms	CRU Components for reuse; MFR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy								






Energy Breakdown Electricity used in the manufacturing

Name	Data source	GWP excl. biogenic [kg CO2-eq/kWh]
Electricity Residual Mix - Sweden (2023)	AIB	1,17E-2

Breakdown of electricity usage

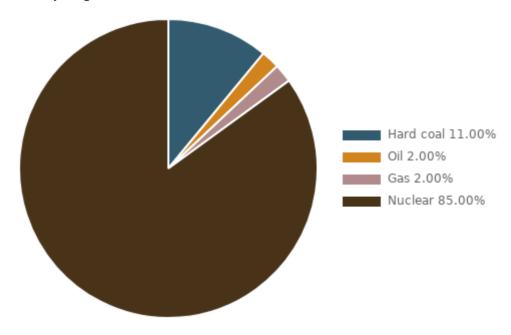





Product Table

Name	Weight, kg	Unit
FEMALE THREAD HIGH NECK PN25 G2"	2.020	рс
FEMALE THREAD HIGH NECK PN25 G1 1/2"	1.289	рс
FEMALE THREAD HIGH NECK PN25 G1 1/4"	0.936	рс
FEMALE THREAD HIGH NECK PN25 G1"	0.621	рс
FEMALE THREAD HIGH NECK PN25 G3/4"	0.425	рс
FEMALE THREAD HIGH NECK PN25 G1/2"	0.279	рс
FEMALE THREAD HIGH NECK PN25 G3/8"	0.193	рс





Additional information

Additional Environmental Information

See the PCR and sections 5.4, 7.3 and 7.4 in EN 15804.

An EPD may include additional environmental information, in addition to the LCA results of the section on environmental performance results. The additional environmental information may cover various aspects of specific relevance for the product, for example:

- instruction for proper use of the product, e.g. to minimise the energy or water consumption or to improve the durability of the product;
- instructions for proper maintenance and service of the product;
- information on key parts of the product determining its durability;
- information on recycling including e.g. suitable procedures for recycling the entire product or selected parts and the potential environmental benefits gained;
- information on a suitable method of reuse of the product (or parts of the products) and procedures for disposal as waste at the end of its life cycle,
- information regarding disposal of the product or inherent materials, and any other information considered necessary to minimise the product's end-of-life impacts,
- information on permanent (more than 100 years) storage of biogenic carbon, either in the product, in a landfill, or as a consequence of applying carbon capture and storage (CCS) to the incineration of biogenic carbon, and how this would influence GWP-biogenic results if the GWP-biogenic indicator would allow consideration of such storage (it currently does not according to EN 15804; in case of such storage a virtual emission of biogenic CO2 has to be added, see Annex 2)
- a more detailed description of an organisation's overall environmental work such as:
 - the existence of a quality or environmental management system or any type of organised environmental activity, and
 - information on where interested parties may find more details about the organisation's environmental work.

Additional environmental information can also include information on carbon offset, carbon storage and delayed emissions, or on release of dangerous substances to indoor air, soil and water during the use stage.

Additional social and economic information

The EPD may also include other relevant social and economic information as additional and voluntary information. This may be product information or a description of an organisation's overall work on social or economic sustainability, such as activities related to supply chain management or social responsibility.

Any additional social and economic information declared shall be substantiated and verifiable, and be derived using appropriate methods and be specific, accurate, not misleading, and relevant to the specific product. Quantitative information is preferred over qualitative information.





Sustainability of construction works: Environmental product declaration - Core

References

EN 15804:2012+A2

rules for the product category of construction products. EPD International (2021) General Programme Instructions of the International EPD® System, version 4.0. EPD International (2024) PCR 2019:14. Construction products and construction services (EN 15804: A2) v1.3.4. ISO 14020:2000 Environmental labels and declarations: General principles. ISO 14025:2006 International Standard ISO 14025: Environmental labels and declarations — Type III environmental declarations — Principles and procedures. ISO 14040:2006 International Standard ISO 14040: Environmental Management - Life cycle assessment - Principles and framework. Second edition 2006-07-01. ISO 14044:2006 International Standard ISO 14044: Environmental Management - Life cycle assessment - Requirements and Guidelines. SCB (2023) https://www.statistikdatabasen.scb.se/pxweb/en/ssd/START_MI_MI0305 /MI0305T003/table/tableViewLayout1/

Association of Issuing Bodies European Residual Mixes 2021 (2022)

https://www.aib-net.org/sites/default/files/assets/facts/residual-

mix/2021/AIB_2021_Residual_Mix_Results_1_1.pdf

(Retrieved 2023-09-20)

Accessed 2024-02-03

Searates (2024) https://www.searates.com/services/distances-time/ (Accessed 2024-02-03)

Accessed 2024-02-03





Contact Info

G-C

EPD owner:

a∙collectio

Ahlsell AB

Email: ekatherine.lagovardos@ahlsell.se

Telephone: +46 8 685 70 00

Address: SE-117 98 Stockholm, Sweden

(Z CARBONZERO

LCA author:

Carbonzero AB

Email: info@eando.se

Telephone: +464 317 07 07

Address: SE-262 32 Ängelholm, Sweden

LCA Studio

Third party verifier:

Vladimír Kocí

Email: vladimir.koci@lcastudio.cz Telephone: +420 608 055 972

Address: LCA Studio, Šárecká 1962/5, 160 00 Praha 6

rogram operator

EPD®

Program operator: EPD

EPD International AB

Email: info@environdec.com Telephone: +46 (0)73 311 30 20 Address: SE-11427 Stockholm, Sweden