

Environmental Product Declaration



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

SCG Portland Bulk Cement Type III

from

SCG Cement



Programme:

Programme operator:

EPD registration
number:

Publication date:

Valid until:

The International EPD® System, www.environdec.com

EPD International AB

EPD-IES-0015837

2024-08-07

2029-08-06


An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme:	The International EPD® System
EPD Owner:	The Concrete Products and Aggregate Co., Ltd.
Address:	1516 Pracharat 1 Road, Khwaeng Wong Sawang, Khet Bang Sue, Bangkok 10800 Thailand
Website:	https://www.scg.com/landing/index_en.html
Products:	Cement Product

Third-party verification

Name and organization of verifier:	EUROPEAN INSPECTION AND CERTIFICATION COMPANY S.A.
Date and location:	89 Chlois and Likovriseos Str. Metamorfoosi 144 52, Athens / Greece
Signature:	Lead Verifier: Ioannis Sotirakis, EUROCERT S.A. 
<p>This declaration is based on the European standard - EN 15804:2012+A2:2019/AC:2021 Independent verification of the declaration and data, according to EN ISO 14025</p> <p style="text-align: center;"> <input type="checkbox"/> Internal <input checked="" type="checkbox"/> External </p>	
Reference standards:	ISO 14025:2006, ISO 14020:2000, EN 15804:2012+A2:2019 /AC:2021, PCR 2019:14 Construction-products and services, version 1.3.4
<p>Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: <input checked="" type="checkbox"/> EPD verification by accredited certification body Third-party verification: EUROCERT S.A. is an approved certification body accountable for the third-party verification. The certification body is accredited by: Hellenic Accreditation System SA (E.S.Y.D), Accreditation number 21</p>	

LCA Information

Title:	Life Cycle Assessment of Cement production of The Concrete Products and Aggregate Co., Ltd: 1,000 kg average Cement
Date of Issue:	Jun 2024
Preparer:	Monwikan Kajohnboon – Environment and Social Manager Sittipat Yanothai – Environment and Social Manager Yostada Uchuwat – ESG Consultant Environment & Social Management Department Email: monwikak@scg.com , sittipay@scg.com , yostadua@scg.com The Concrete Products and Aggregate Co., Ltd. 1516 Pracharat 1 Road, Khwaeng Wong Sawang, Khet Bang Sue, Bangkok 10800 Thailand

The EPD owner has the sole ownership, liability and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

PCR review was conducted by: The Technical Committee of the International EPD System. See www.environdec.com for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact.

This report presents the aggregated results per indicator and per life cycle stage, as per PCR 2019:14 Construction products version 1.3.4 (EN 15804: A2) and complementary PCR c-PCR-001 Cement and building limes (EN 16908 PAGE 10/24)

This product is classified as identical product which are not marketed as different products and/or are in no other way distinguishable by a downstream customer. For identical products, variations due to differences of GHG emission between the declared results and the results from each site with the highest and lowest results that are below 10%

Company Profile

SCG was established in 1913 following a Royal Decree by His Majesty King Rama VI as a means to reduce the nation's reliance on the import of cement. Since its foundation, the company has expanded its business and grown steadily into SCG, one of Thailand's leading industrial conglomerates.

With more than 100 years of experience and know-how, SCG, the manufacturer and supplier of SCG, has committed itself to developing and leveraging the standards of products in the market to ensure the excellent quality of its cement products that best address every application need and contribute to the development of the construction industry in Thailand.

The Cement and Green Solution business is a core business unit of SCG which The Concrete Products and Aggregate Co., Ltd. as an own legal entity.

While SCG Cement is represented as the branding used for external communications of cement and mortar products for construction industry in Thailand.



We are committed to reducing greenhouse gases and aim for net zero by 2050. Our key strategies include: (1) Reducing fossil fuel use and increasing the use of alternative fuels (AF) such as biomass and refuse-derived fuel (RDF) (2) Increasing the proportion of renewable energy (RE) usage, such as waste heat recovery and solar power, as well as exploring new technologies like energy storage (3) Developing low-carbon products to reduce CO₂ emissions from clinker usage (4) Developing carbon capture, utilization and storage (CCUS) technologies and (5) Implementing carbon sinks through natural climate solutions.

SCG Cement focused on developing green products, following Thailand's Net Zero Roadmap, which is one of the business priorities. The business is the first cement manufacturer in Thailand to receive the "Green Label" and "Carbon Reduction Label" for its achievement to reduce greenhouse gas emissions through the development of low-carbon products.

Additionally, the company became a member of the Global Cement and Concrete Association (GCCA), collaborating with GCCA and Thai Cement Manufacturers Association (TCMA) to drive the Thailand 2050 Net zero cement and concrete roadmap, aiming to guide Thailand's cement and concrete industry towards Net zero 2050.

Furthermore, the company has previously proclaimed "Mission 2023", on behalf of the association's members in the Thai Cement Manufacturers Association (TCMA), as part of the efforts to advance towards carbon neutrality on industrial processes and product use, including clinker replacement measures by driving for the manufacturing of hydraulic cement in Thailand.

Company information

The production process of SCG Cement to the standards of product manufacturing with quality control at every step. It ensures quality from the selection of raw materials to the final stage of product manufacturing before distribution, ensuring that the produced products meet the specified standards such as American Society for Testing and Materials (ASTM), International Organization for Standardization (ISO); ISO 9001 (2015), ISO 14001 (2015), ISO 45001 (2018) and Thailand Industrial Standard (TIS). SCG Cement products also received Carbon Footprint Product Labels and Carbon Footprint Reduction Labels by Thailand Greenhouse Gas Management Organization.

Currently, SCG Cement has a total of 5 grey cement production plants in Thailand, as listed below:

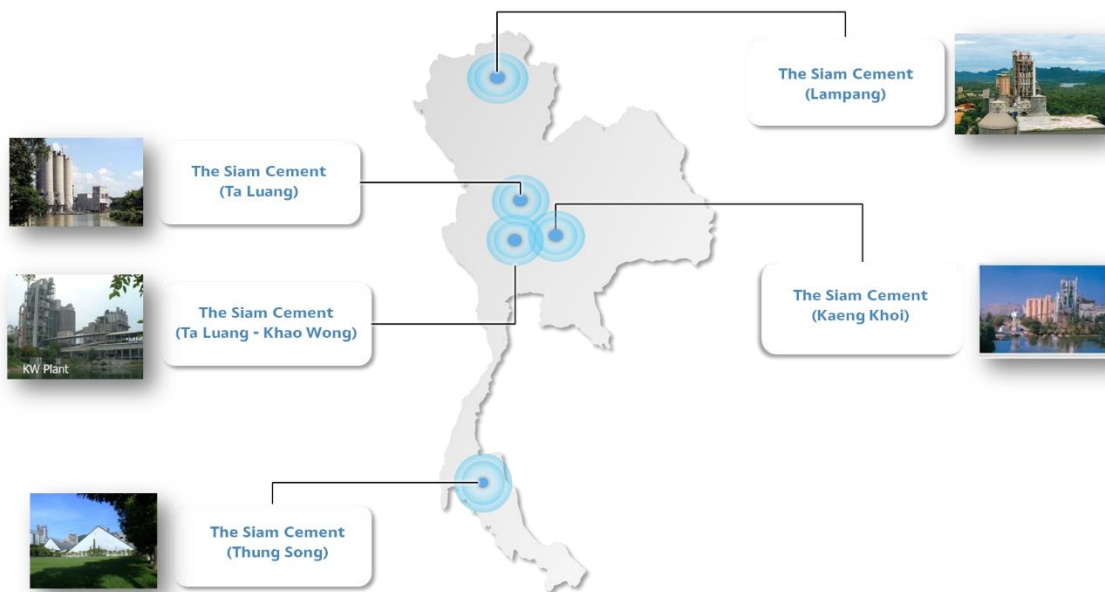


Figure 1: SCG Cement production plants

Table 1: Cement production address located in Thailand

Plant	Address
Plant 1	The Siam Cement (Kaeng Khoi) 33/1 Moo 3, Mittraphap Road Ban Pa Sub-District, Kaeng Khoi District, Saraburi 18110
Plant 2	The Siam Cement (Ta Luang) 1 Moo 9, Ban Krua Sub-District, Ban Mo District, Saraburi 18270
Plant 3	The Siam Cement (Ta Luang - Khao Wong) 28 Moo 4, Na Pralan-Ban Krua Road Khao Wong Sub-District, Praputtabath District, Saraburi 18120
Plant 4	The Siam Cement (Thung Song) 52 Moo 6, Thung Song-Huai Yot Road Tee Wang Sub-District, Thung Song District, Nakhon Sri thammarat 80110
Plant 5	The Siam Cement (Lampang) 279 Moo 5, Bansa Sub-District, Chae Hom District Lampang 52120

Company certifications, awards and standards

SCG cement has achieved several awards and certifications and standards, each standard highlights our commitment to high industry standards. Certifications demonstrate our rigorous quality control, best practices in sustainable development, and ongoing improvements. Awards enhance our reputation as a top manufacturer in Thailand and reflect our dedication to excellence, innovation, and environmental stewardship. By complying to these achievements, SCG Cement not only provides superior products but also supports environmental conservation, strengthen our role as a trusted and responsible leader manufacturer in the industry.

Our company focuses on excellence and honor to have received several esteemed awards, certifications, and quality standards as follows:

Green product labels



Carbon Footprint Product Labels
from Thailand Greenhouse Gas Management Organization (Public Organization)



Carbon Footprint Reduction Labels
from Thailand Greenhouse Gas Management Organization (Public Organization)



Thai Green Labels
from Thailand Business Council for Sustainable Development

Industry awards



Green Industry Level 5 (Highest level) Green Network
from Department of Industrial Works, Ministry of Industry



The Prime Minister's Industry Award
from Department of Industrial Works, Ministry of Industry

Investing rater awards



A- level in climate change
from Carbon Disclosure Project



Rated AAA in the SET ESG Ratings
from the Stock Exchange of Thailand



The highest score in the Construction Materials Industry
from the Dow Jones Sustainability Indices

Association goal groups



Global Cement and Concrete
Association member



Thai Cement Manufacturers
Association member



Near Term Target has been validated
by Science Based Targets initiative

International Standards

All plants are Green Industry Level 5 (The highest level)
Certified by the Department of Industrial Works.



- ISO 9001:2015 Quality Management System (QMS)
- ISO 14001:2015 Environmental Management System (EMS)
- ISO 45001:2018 Occupational Health and Safety Management System (OHSMS).

Product information



Product name

SCG Portland Bulk Cement Type III.

Product description

SCG Portland Bulk Cement Type III or High Early Strength Cement with a faster rate of high early strength, this Portland Cement Type 3 allows contractors to complete work faster. It is ideal for the production of prestressed concrete products such as concrete planks, piles and electrical poles.

Standard

- The United Nations Central Product Classification (UN CPC)

Table 2: The United Nations Central Product Classification (UN CPC) code 374 for Cement, lime and plaster

Group	Class	Subclass	Title	Corresponding		
				HS 2007	CPC 2	ISIC 4
374	3744	37440	Portland cement, aluminous cement, slag cement and similar hydraulic cements, except in the form of clinkers	2523.21-.90	37440	2394

- Thailand Industrial Standard (TIS) 15
- American Society for Testing and Materials (ASTM) C150

Table 3: Cement properties according to ASTM C150

Chemical Properties	
SO ₃	0 %
Total Alkalies as Na ₂ O	≤ 0.6 %
Physical Properties	
Soundness: Autoclave Expansion	≤ 0.8 %
Initial Setting Time	≥ 45 min.
Mechanical Properties	
Comprehensive Strength:	
3 days	≥ 24.0 MPa
28 days	≥ 28.0 MPa

LCA information

Functional unit / declared unit:

The declaration is established product of these manufacturing plants. The average is based on the accounted production volume of each plant. The declared unit is 1 ton (1,000 kg).

Reference service life:

Not relevant due to the cradle-to-gate boundary conditions.

Time representativeness:

The data used in this study cover the reporting year of 2022.

Database(s) and LCA software used:

Database is collected from all Cement plants in Thailand follow methodology - GCCA Industry EPD Tool for Cement and Concrete (v4.2, International version, 18 December 2023)

This LCA was modelled with the program EPD Tool v.4.2 from GCCA (Global Cement and Concrete Association) with the scope of A1-A3, cradle-to-gate.

Key assumption & allocations:

Data collection for production, energy consumption, water usage, air emissions and waste produced was be collected from actual data at each facility.

The study does not include the followings:

- Capital equipment production
- Equipment maintenance
- Human labor and employee transport

Allocation was minimized wherever feasible. Production was divided into two subprocesses: clinker and cement. Data for inputs and outputs were recorded separately for each subprocess. When electricity, water usage, waste and air emission could not be directly attributed to a specific product, they were allocated by mass. No by-products are generated during clinker and cement production, eliminating the need for allocation in by-products.

For transportation, the payload was defined by the enterprise resource planning (ERP) system (by SAP) used by the company and the distance was calculated as an average distance (weight average).

Since air emissions data are based on quarterly spot measurements. Then the collected spot data are calculated to an average value within the selected time frame in declared unit as a limitation data. Using spot measurements as representative data for annual emission.

GWP-GHG of the electricity mix used is 0.6605 kg CO₂eq./kWh calculated from national database on power generation from different resources in reference with the Annual Report 2022, the Electricity Generating Authority of Thailand (EGAT) and the Annual Report 2022, the Energy Policy and Planning Office (EPPO), the Ministry of Energy, Thailand. This also complies with PCR 1.3.4 section 4.8.1 (Residual electricity mix on the market).

Comparability:

EPD performance for construction products that they do not comply with EN 15804 may not be comparable. EPDs from separate programs but within the same product category may not be comparable as well.

Cut-off rules:

The PCR: Section 4.4 and ISO 21930: Section 7.1.8 cut-off criteria were complied with. Every necessary set of input/output data was gathered and incorporated into the LCI modeling. Within the framework of this EPD, no compounds with toxic or hazardous qualities that may harm human health or the environment were found.

Description of underlying LCA – Based information

The cement production process of all SCG Cement plants in the following the steps as shown in Figure 2:

1. Raw Meal Preparation

The main raw materials for cement production include limestone, clay, shale and additional minerals such as gypsum and slag etc. These raw materials are crushed to be ground and mixed together in appropriate proportions into the homogenized material called “raw meal”.

2. Clinker Production

The raw meal is transported to the cyclone preheater from the top to the bottom to exchange heat with the hot air from the kiln and when the temperature reaches around 800 – 900 °C, limestone undergoes a process called Decarbonization, where it decomposes into Calcium oxide (CaO) and carbon dioxide (CO₂). After that, these materials are fed into the rotary kiln for be burned with temperatures reaching up to 1,450 °C. Important compounds such as tricalcium silicate (C3S), dicalcium silicate (C2S), tricalcium aluminate (C3A) and tetracalcium aluminoferrite (C4AF) are formed which melt together to form “clinker”. The clinker flows out of the kiln through a clinker cooler to rapidly reduce its temperature before being transported to the storage in the clinker silo.

3. Cement Grinding

Clinker will be conveyed into the cement mill for grinding, mixed with gypsum, limestone, fly ash and special additives in proportions designed to be suitable for the type of cement. The grinding process of cement involves high quality control, both chemically and physically to ensure a consistently high-quality product that meets customer requirements.

4. Packing

The cement is conveyed to the silo for storage, awaiting further packaging and transportation. It can be packaged both into bulk and bags before being transported to various retailers, factories, or construction sites etc.

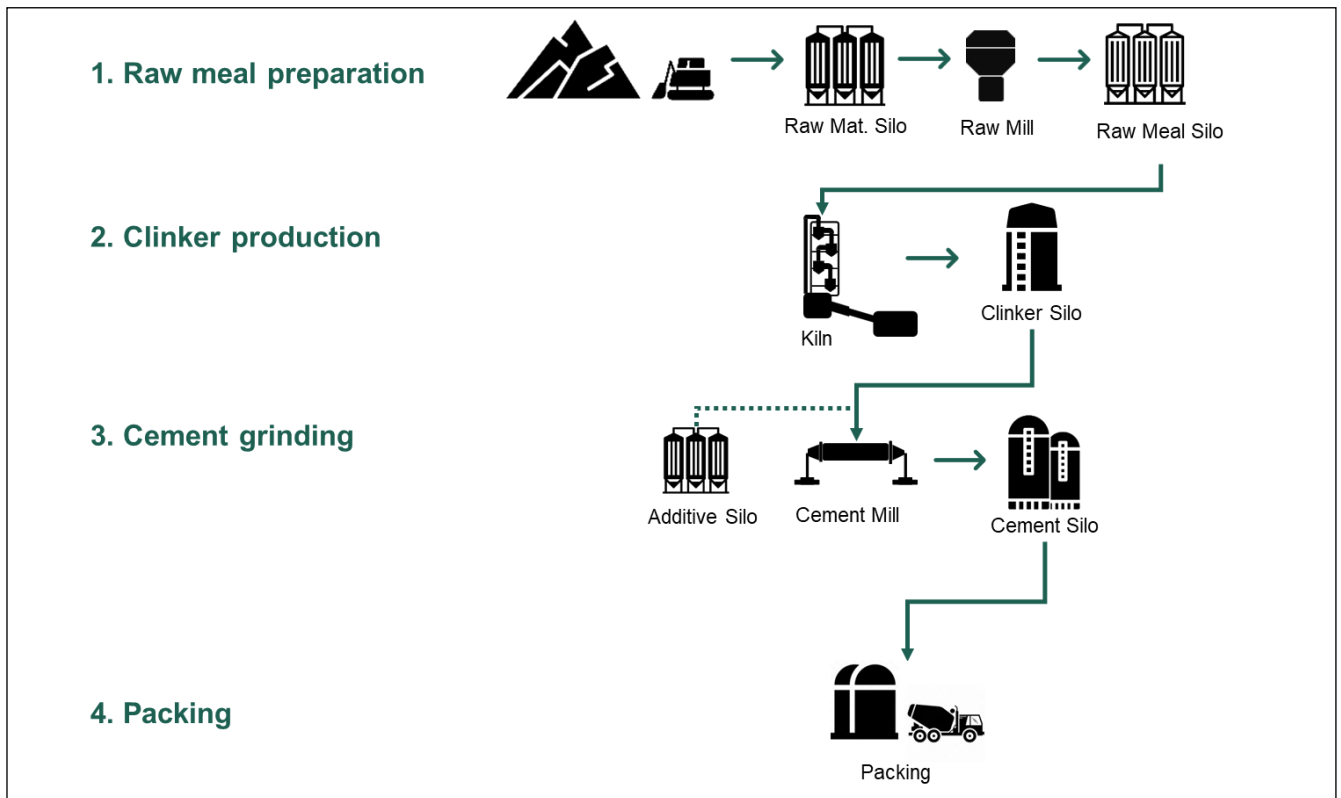


Figure 2: Cement production process

A1: Raw Material Supply

The production process commences with the raw material supply, encompassing the extraction and processing of raw materials and the generation of electricity and fuels necessary for manufacturing process.

The primary raw materials in the production process consist of limestone, clay, shale, etc. which mainly composed of calcite, alumina, silicate and ferrite. These materials are extracted using drilling, blasting techniques and crushing before transported to clinker burning process.

A2: Transportation

The transportation of primary raw materials to the manufacturer involves sourcing from SCG's quarry, as well as from suppliers to the entrance of SCG's cement plant. Conveyors and Trucks are employed to transport raw materials from various regions to each of SCG's cement plants.

Limestone sourced from SCG's quarry is transported to the cement plant via conveyors belt to keep the pile with stacker.

Additionally, other raw materials such as shale, clay, gypsum, fly ash, sand, other alternative raw material (Industrial waste or by product form other industry) and additives are transported via trucks and stored in the outdoor or/and indoor building.

The raw material will be transported into Feed Hopper and the forward to Raw Mill. The raw materials grinding will extract hot air from the burning process (Kiln) to unused heated material at the pre-heater tower which has a temperature of approximately 325 °C to moisture out of the material during the grinding in the Raw mill. The raw material powder is stored in Blending Silo and enters to the clinker burning process.

A3: Manufacturing

The manufacturing process overview begins with the grinding material (Raw meal) is conveyed out of Blending Silo to the cyclone preheater from the top to the bottom to exchange heat with the hot air from the kiln which the grinding material is heated and has a temperature of about 800 – 900°C and flows to Pre-Calcliner and transferred to Rotary Kiln for burning process with temperatures reaching up to 1,450°C. This process used coal-fired fuel as the main fuel and RDF (Refuse-derived fuel), Industrial waste and Biomass as the alternative fossil fuels.

The waste heat from the pre-calcliner and kiln processes will be reused in the raw material preparation process to reduce the moisture content of the materials and will be sent to the AQC boiler to generate electricity. The hot air will then pass through the bag filter and electrostatic precipitator (EP) before being vented into the atmosphere.

After the clinker burning process, the clinker will be conveyed into the cement mill for grinding with gypsum, limestone, fly ash and special additives in proportions designed to be suitable for the type of cement.

Following mixing and grinding, the cement is conveyed to the silo for storage and packaged into bags or bulk containers. Finally, the packaged final products are ready for delivery to customers and dealer.

For the electricity in cement production process is met by the National Grid of Thailand, plant's heat recovery system and solar power system.

Table 4: Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Geography	Thailand			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Specific data used	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	<10%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	<10%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

This section presents the aggregated results per indicator and per life cycle stage, as per PCR 2019:14 Construction products version 1.3.4 (EN 15804: A2) and complementary PCR c-PCR-001 Cement and building limes (EN 16908 PAGE 10/24), including i) core environmental impact indicators (13 indicators), ii) additional environmental impact indicators (6 indicators), iii) parameters describing resource use (10 indicators), iv) other environmental information describing waste categories (3 indicators) and environmental information describing output flows (4 indicators).

The scope of this study is “cradle to gate” covering the product stage (modules A1-A3), since the product fulfils the three conditions required by EN 15804:2012+A2:2019, about the exclusion of modules C1-C4 and D. The stage included in the study is just product stage (A1-A3), since the product fulfils the three conditions required:

- the product or material is physically integrated with other products during installation so they cannot be physically separated from them at end of life.
- the product or material is no longer identifiable at end of life as a result of a physical or chemical transformation process.
- the product or material does not contain biogenic carbon.

Product Components

Composition	
Clinker	93 - 95 %
Minor Additional Constituents	0 - 7 %

Packaging materials weight per 1,000 kg product average

Product Name	Weight	Packaging materials		
		Paper	PE-film	Total
SCG Portland Bulk Cement Type III	Weight, kg	-	-	-
	Weight-% (versus the product)	-	-	-

Environmental Information

This section presents impact categories (indicators 1-14 and 15-20) for each indicator and per life cycle stage, as per PCR 2019:14 VERSION 1.3.4 Construction products (EN 15804: A2) and complementary PCR c-PCR-001 Cement and building limes (EN PAGE 10/24 16908)

Impact per 1,000 kg average

Potential environmental impact – mandatory indicators according to EN 15804

Indicator	Unit	Total A1-A3
Global Warming Potential, GHG	kg CO ₂ eq.	8.85E+02 **
Global Warming Potential, total	kg CO ₂ eq.	8.85E+02 *
Global Warming Potential, fossil fuels	kg CO ₂ eq.	8.85E+02 *
Global Warming Potential, biogenic	kg CO ₂ eq.	2.59E-01 *
Global Warming Potential, land use and land use change	kg CO ₂ eq.	8.22E-02
Depletion potential of the stratospheric ozone layer	kg CFC 11 eq.	1.03E-05
Acidification potential, Accumulated Exceedance	mol H ⁺ eq.	2.09E+00
Eutrophication potential, fraction of nutrients reaching freshwater end compartment	kg P eq.	1.65E-01
Eutrophication potential, fraction of nutrients reaching marine end compartment	kg N eq.	1.04E-02
Eutrophication potential, Accumulated Exceedance	mol N eq.	8.01E+00
Formation potential of tropospheric ozone	kg NMVOC eq.	1.80E+00
Abiotic depletion potential for non- fossil resources	kg Sb eq.	1.75E-04 ***
Abiotic depletion potential for fossil resources potential	MJ, net calorific value	3.60E+03 ***
Water (user) deprivation potential, deprivation-weighted water consumption	m ³ world eq. deprived	3.08E+01 ***

* The indicated values (gross values) include the greenhouse gas emissions from the incineration of secondary fuels at clinker production. The net GWP-tot (excluding the emissions from the incineration of secondary fuels at clinker production) is 859.6 kg CO₂-eq. The net GWP-fos is 859.4 kg CO₂-eq. The net GWP-bio is 0.1207 kg CO₂-eq.

** The indicated values (gross values) include the greenhouse gas emissions from the incineration of secondary fuels at clinker production. The net GWP-GHG (excluding the emissions from the incineration of secondary fuels at clinker production) is 859.6 kg CO₂-eq.

*** The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

Additional environmental impact indicators

Indicator	Unit	Total A1-A3
Potential incidence of disease due to PM emissions	Disease incidence	1.99E-05
Potential Human exposure efficiency relative to U235	kBq U235 eq.	3.96E+00
Potential Comparative Toxic Unit for ecosystems	CTUe	1.12E+03
Potential Comparative Toxic Unit for humans - cancer	CTUh	2.19E-01
Potential Comparative Toxic Unit for humans - non-cancer	CTUh	1.61E-05
Potential soil quality index	dimensionless	2.03E+03

Parameters describing resource use

Indicator	Unit	Total A1-A3
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	2.34E+02
Use of renewable primary energy resources used as raw materials	MJ	0.00E+00
Total use of renewable primary energy resources	MJ	2.34E+02
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	3.60E+03
Use of non-renewable primary energy resources used as raw materials	MJ.	0.00E+00
Total use of non-renewable primary energy resources	MJ	3.60E+03
Use of secondary materials	kg	6.19E+01
Use of renewable secondary fuels	MJ	1.99E+02
Use of non-renewable secondary fuels	MJ	2.64E+02
Net use of fresh water	m ³	8.56E-01

Other environmental information describing waste categories

Indicator	Unit	Total A1-A3
Hazardous waste disposed	kg	0.00E+00
Non-hazardous waste disposed	kg	0.00E+00
Radioactive waste disposed	kg	0.00E+00

Environmental information describing output flows

Indicator	Unit	Total A1-A3
Components for re-use	kg	0.00E+00
Material for recycling	kg	0.00E+00
Materials for energy recovery	kg	0.00E+00
Exported electrical energy	MJ per energy carrier	0.00E+00
Exported thermal energy	MJ per energy carrier	0.00E+00

Extra indicators

Indicator	Unit	Total A1-A3
Emissions from calcination and removals from carbonation	kg CO ₂ eq.	5.25E+02
Emissions from combustion of secondary fuels from renewable sources used in production processes	kg CO ₂ eq.	1.39E-01
Emissions from combustion of secondary fuels from non-renewable sources used in production processes	kg CO ₂ eq.	2.54E+01
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO ₂	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO ₂	0.00E+00

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Other environmental information

SCG announced target to achieve Net Zero Emissions refer to Science Base Target initiative (SBTi) by 2050 and 25% greenhouse gases reduction by 2030 from base year 2020. In 2022, SCG achieved a reduction of 4.13 million tons CO₂eq in greenhouse gases emissions or 12.05% from base year 2020 by enhancing alternative fuels usage such as biomass from agricultural wastes and refuse derived fuel (RDF) for cement productions. In addition, our cement plants attempt to increase a proportion of renewable energy by using solar energy and waste heat recovery. The Company also made research and investment in deep technologies such as carbon capture utilization and storage (CCUS) technology, calcined clay cement and alternative supplementary cementitious material (SCMs). Furthermore, SCG has also managed to reforest as a carbon sink in response to the Natural Climate Solutions (NCS) projects.

As a member of Thai Cement Manufacturers Association (TCMA), SCG joined the Association in announcing “Mission 2023” as part of the efforts to advance towards carbon neutrality on Thailand’s cement industry by using low carbon cement product to achieve GHG emissions reduction of 1,000,000 tons CO₂eq by 2030.

Differences versus previous versions

This is the first EPD version – No previous versions

References

1. American Society for Testing and Materials (2022) - Standard Specification for Portland Cement
2. Electricity Generating Authority of Thailand (2022) – Annual power consumption report.
3. Energy Policy and Planning Office (2022) - Annual report.
4. Energy Regulatory Commission of Thailand (2022) - Annual report.
5. EPD INTERNATIONAL (AB) (2024) Product Category Rules (PCR) 2019:14 - Construction Products; version 1.3.4
6. European Committee for Standardization (2021) EN 15804:2012+A2:2019/AC:2021 Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products.
7. European Committee for Standardization (2022) Complementary Product Category Rules c-PCR-001 - Cement and building limes.
8. Global Cement and Concrete Association (2023) - GCCA Industry EPD Tool for Cement and Concrete
 - User Guide (v4.2, International version, 18 December 2023)
 - LCA Model (v4.2, International version, 18 December 2023)
 - LCA Database (v4.2, 18 December 2023)
 - Verification Report (18 December 2023)
9. Office of Natural Resources and Environmental Policy and Planning (2022) – Annual Power data report.
10. United Nations (2015) United Nations Central Product Classification (UN CPC); version 2.1

