



## ENVIRONMENTAL PRODUCT DECLARATION

### IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

EPD of multiple products (ALUMINIUM GLASS DOORS, WINDOWS)

Sliding Doors;  
Sliding Windows;  
Single & Double Hung Windows;  
Awning Doors;  
Casement Windows;  
Awning Windows;  
Fixed Windows;  
Bi-Folding Doors;  
Bi-Folding Windows.

(EPD of multiple products, based on a representative product)  
from

**QUAN DAT TRADING AND PRODUCTION COMPANY LIMITED**

**Programme:**

The international EPD® system, [www.environdec.com](http://www.environdec.com)

EPD registered through the fully aligned regional hub EPD Southeast Asia,  
<https://www.epd-southeastasia.com/>

**Programme operator:**

EPD International AB

**Regional Hub**

EPD Southeast Asia

EPD registration number: EPD-IES-0012803 (S-P-12803)

Publication date: 2024-08-22



Valid until: 2029-08-22

Geographical scope: Vietnam

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).*

# GENERAL INFORMATION

## PROGRAMME INFORMATION

| Programme Operator  |   |
|---|---|
| <br>THE INTERNATIONAL EPD® SYSTEM<br><b>EPD International AB</b><br>Box 210 60<br>100 31 Stockholm<br>Sweden<br>www.environdec.com | <br>THE INTERNATIONAL EPD SYSTEM<br><b>EPD Southeast Asia</b><br>Kencana Tower Level M, Business<br>Park Kebon Jeruk<br>Jl Raya Meruya Ilir No. 88<br>Jakarta Barat 11620, Indonesia<br>admin@epd-southeastasia.com<br>www.epd-southeastasia.com |

| Accountabilities for PCR, LCA and independent, third-party verification   |
|---|
| <b>Product Category Rules (PCR)</b>   |
| CEN standard EN 15804 serves as the Core Product Category Rules (PCR)   |
| PCR 2019:14 Construction products, version 1.3.4 (2024-04-30)<br>c-PCR-007, Windows and doors, version 2024-04-30   |
| PCR review was conducted by: Martin Erlandsson, IVL Swedish Environmental Research Institute, martin.erlandsson@ivl.se  |
| <b>Life Cycle Assessment (LCA)</b>  |
| LCA accountability: <i>Le Van Tam, tamvan68@gmail.com,</i>  |
| <b>Third-party verification</b>   |
| Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:<br><input checked="" type="checkbox"/> EPD verification by individual verifier<br>Third-party verifier: <i>Anni Oviir, Rangi Maja OÜ, <a href="https://www.lcasupport.com/">https://www.lcasupport.com/</a></i><br>Approved by: The International EPD® System |
| Procedure for follow-up of data during EPD validity involves third party verifier:<br><input type="checkbox"/> Yes <input checked="" type="checkbox"/> No   |

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

It is important to note that the results presented in modules A1-A3 should not be used in isolation without also considering the results of module C.

The EPD's declared environmental impacts are based on a representative product, so using it for significantly different variants may lead to inaccurate assessments.

## MANUFACTURER INFORMATION

|   |   |
|---|---|
| Manufacturer  | <b>QUAN DAT TRADING AND PRODUCTION COMPANY LIMITED</b>  |
| Address   | 536 Quang Trung, Ward 11, Go Vap District, Ho Chi Minh City, Vietnam                                    |
| Contact details   | project@quandat.com.vn  |
| Website   | www.quandat.com.vn  |
| Product-related or management system-related certifications | ISO 9001:2015; ISO 14001:2015; ISO 45001:2018.<br>The certificates issued by NQA and accredited by UKAS |

## PRODUCT INFORMATION

### PRODUCT DESCRIPTION

- Constructed with durable aluminium frames.
- Frames can be anodized, powder-coated, or painted for various finishes.
- Typically include heat strengthened or tempered glass; laminated or IGU or laminated IGU glass for safety and strength.

The EPD is an EPD of multiple products that represent various product versions, with different sizes and designs. The result presented in the EPD is the result of the representative product 'Sliding Doors'.



### PRODUCT IDENTIFICATION

|                            |  |
|----------------------------|--|
| Product name               | ALUMINIUM GLASS DOORS, WINDOWS   |
| Additional label(s)        | -  |
| Product number / reference | Sliding Doors;<br>Sliding Windows;<br>Single & Double Hung Windows;<br>Awning Doors;<br>Casement Windows;<br>Awning Windows;<br>Fixed Windows;<br>Bi-Folding Doors;<br>Bi-Folding Windows; |
| Place(s) of production     | No. 85A, DT748 Street, An Dien Ward, Ben Cat City, Binh Duong Province, Vietnam  |
| CPC code                   | 42120-Doors, windows and their frames and thresholds for doors, of iron, steel or aluminium.   |

### PRODUCT APPLICATION

Suitable for both residential and commercial buildings.

### PRODUCT STANDARDS

EN 14351-1:2006+A2:2016: Windows and doors - Product standard, performance characteristics - Part 1: Windows and external pedestrian doorsets

## TECHNICAL SPECIFICATION:

| Name of Criterion    | Level   | Test Method  |
|----------------------|---|--------------|
| 1. Impact Resistance | Indentation depth not greater than 2 mm with a test sample weight of 3 kg ± 0.5 kg                                | AS 2688:2017 |
| 2. Water Tightness   | No water streaks appear on the inside surface of the window & door with a test pressure greater than 150 Pa       | EN 1027:2000 |
| 3. Air Permeability  | Air leakage through the window is less than 13.9 l/s/m <sup>2</sup> corresponding to a minimum pressure of 100 Pa | EN 1026:2000 |

## PRODUCT RAW MATERIAL COMPOSITION

| Product Material   | Weight, kg | Post-consumer material, weight-% | Biogenic material, weight-% and kg C/kg |
|--------------------|------------|----------------------------------|---|
| Glass              | 17.1874    | 0                                | 0                                       |
| Aluminium profiles | 5.74093    | 0                                | 0                                       |
| Stainless steel    | 0.26064    | 0                                | 0                                       |
| Rubber             | 0.20669    | 0                                | 0                                       |
| Silicone           | 0.19168    | 0                                | 0                                       |
| Aluminium          | 0.02479    | 0                                | 0                                       |
| Pp plastic         | 0.01296    | 0                                | 0                                       |
| Steel              | 0.00575    | 0                                | 0                                       |
| Paint              | 0.00328    | 0                                | 0                                       |

## PACKAGING

The windows are generally transported directly from production site to the building site by lorry. Windows are separated from each other by plastic film and corrugated board. These packaging materials are included in the scope of this EPD.

| Packaging Material             | Weight, kg | Weight-% (versus the product) | Biogenic material, kg C/product or declared unit |
|--------------------------------|------------|-------------------------------|--|
| PINE WOOD                      | 0.287      | 1.2%                          | 0.13   |
| CARDBOARD PAPER                | 0.242      | 1.0%                          | 0.11   |
| LONG COIL AND STRAPPING BUCKLE | 0.0167     | 0.07%                         | 0  |
| PE FILM                        | 0.0104     | 0.04%                         | 0  |
| PET PLASTIC                    | 0.0107     | 0.05%                         | 0  |
| TAPE                           | 0.0205     | 0.09%                         | 0  |

## BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

|  |      |
|--|------|
| Biogenic carbon content in product, kg C   | 0    |
| Biogenic carbon content in packaging, kg C | 0.43 |

Note: The conversion factor from kg carbon to kg CO<sub>2</sub> (44/12).

## SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

## PRODUCT LIFE-CYCLE

### MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The production consists of five steps:

1. Aluminium profile preparation mainly via sawing, milling and gluing. Those aluminium profiles are non-thermal break system and thermal break system.
2. Frame production by assembling the various profiles via corner connections and fixing via gluing and/or rimping. Connectors are composed of aluminium die cast.
3. Positioning and fixing the various gaskets.
4. The fittings integration (if relevant)
5. The fixing of the glazing unit via the glazing bead.

The production line primarily consumes electricity. Diesel is used in forklift for internal transport. Heating by natural gas in winter period has also been considered in this study, taking into account the location of the manufacturing plant, where certain temperature range is required for the correct functioning of the equipment. Ancillary materials include water and cleaning agent. The manufacturer estimates the wastage rate of Aluminium profiles to be 2%.

The manufacturing energy use consists of grid electricity and rooftop solar energy generated by the manufacturer's investment used to power the equipment and lighting at the production plant. Additionally, there is Diesel oil for forklifts, cutting oil used for operating CNC cutting and milling

machines, kerosene for washing components and machine parts, oxygen gas used for welding, and 12kg gas used in welding machines.

Energy data was gathered from invoices and cross checked with metering. Electricity type was confirmed from contract data. Manufacturing waste consists mainly of production losses but also, Wood Waste, Waste oil residue,..Steel and Aluminium Profiles wasted in production are sold as scrap for recycling. Mixed wastes are sent to either landfill or incineration, wood to incineration and paper to recycling. Water used during production is sent to waste water treatment.

The packaging utilizes adhesive tape, PE film, pallets... to protect the product from scratches and abrasions.

In manufacturing, some assembly accessories such as nails, screws, hinges,.. are used.

### TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

Average distance of transportation is calculated based on the distance from the manufacturer to the project/site, which is 194km on average.

The transportation method is lorry. Vehicle capacity utilization volume factor is assumed to be 1 which means full load. In reality, it may vary but as role of transportation emissions in total results is small, the variety in load is assumed to be negligible. To be conservative, empty returns are included in this study as implemented through an average load factor in the Ecoinvent transport datapoints. Transportation does not cause losses as product is packaged properly. Distance from the construction site to waste handling facility is assumed to be 100 km.

Environmental impacts from installation into the building (A5) include emissions from energy use during installation and the generation of waste at the construction site. Due to the inability to measure specific electrical data on-site, electrical data will be calculated based on the power consumption of the device, which is 1.2 kW/h. Regarding packaging waste,

plastic film, cardboard, and steel are considered sorted for recycling, while wood is incinerated with energy recovery.

## PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the Use phase.

Air, soil, and water impacts during the use phase have not been studied.

## PRODUCT END OF LIFE (C1-C4, D)

To demolish the building at the end of its life cycle, assume 0.036 MJ/kg of the product (C1). Waste is delivered to the nearest construction waste treatment plant, assumed to be located 100 km from the construction site (C2). It is assumed that 100% of products are collected at the demolition site. A portion of recyclable materials such as glass, aluminum, steel, and stainless steel is sent directly to recycling facilities with specific recycling rates applied, while the remainder is sent to landfill. Losses in the sorting process are assumed to be very small and not considered in the assessment (C3-C4). Benefits of recycling waste generated in module A5 and C3 are taken into account in module D. The recycled steel and aluminium have been modelled to avoid use of primary materials. The scrap content in the studied product is considered and only the mass of primary steel in the product provides the benefit in order to avoid double counting. Wood waste is incinerated and the generated energy can replace the need for heat energy in district heating (D).

## MANUFACTURING PROCESS

Aluminium glass doors, windows consists mainly in the following process:

1. Aluminium profile preparation mainly via sawing, milling and gluing. Those aluminium profiles are powder coated, non-thermal break system and thermal break system.

2. Frame production by assembling the various profiles via corner connections and fixing via gluing and/or rimping. Connectors are composed of aluminium die cast.
3. Positioning and fixing the various gaskets.
4. The fittings integration (if relevant).
5. The fixing of the glazing unit via the glazing bead.

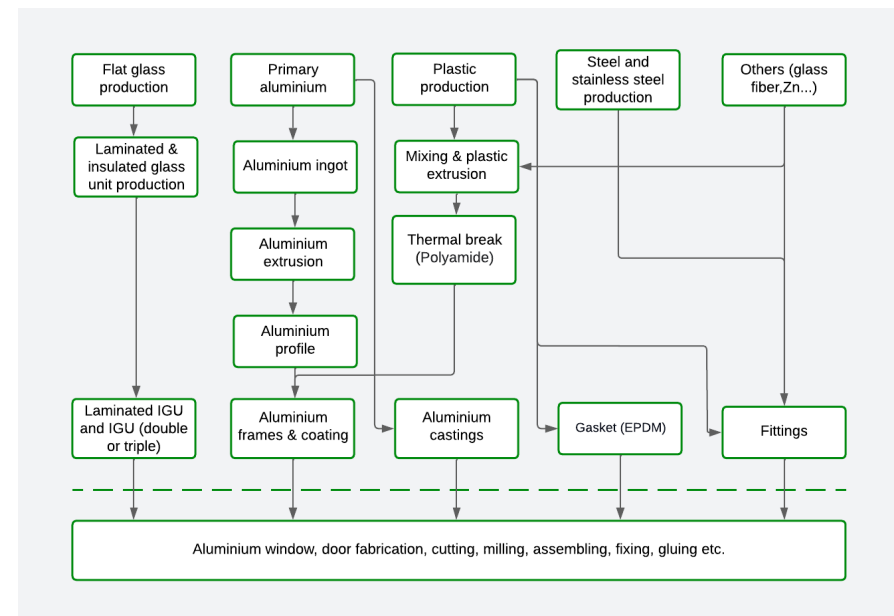


Figure 1. The process diagram.

# LIFE-CYCLE ASSESSMENT

## LIFE-CYCLE ASSESSMENT INFORMATION

|                 |  |
|-----------------|--|
| Period for data | 2023   |
| Background data | Ecoinvent 3.8 (Allocation, cut-off, EN15804).<br>EN 15804 reference package is based on EF 3.0 |
| LCA software    | OpenLCA software   |

## DECLARED AND FUNCTIONAL UNIT

|                        |  |
|------------------------|--|
| Declared unit          | 1 m2, base on the standard measurements given in EN 17213:2020 |
| Mass per declared unit | 23.63 kg   |
| Functional unit        | -  |
| Reference service life | 50 years   |

## SYSTEM BOUNDARY

| Product stage  |           |               | Assembly stage |          | Use stage |             |        |             |               |                        |                       | End of life stage |           |                  |          | Beyond the system boundaries |          |           |
|--|-----------|---------------|----------------|----------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|----------|------------------------------|----------|-----------|
| A1   | A2        | A3            | A4             | A5       | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                | C2        | C3               | C4       | D                            | D        | D         |
| x  | x         | x             | x              | x        | MND       | MND         | MND    | MND         | MND           | MND                    | MND                   | x                 | x         | x                | x        | x                            | x        | x         |
| Geography, by two-letter ISO country code or regions. The International EPD System only. |           |               |                |          |           |             |        |             |               |                        |                       |                   |           |                  |          |                              |          |           |
| VN   | VN        | VN            | VN             | VN       | -         | -           | -      | -           | -             | -                      | -                     | VN                | VN        | VN               | VN       |                              |          | VN        |
| Raw materials  | Transport | Manufacturing | Transport      | Assembly | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstr./demol.  | Transport | Waste processing | Disposal | Reuse                        | Recovery | Recycling |

Modules not declared = MND. Modules not relevant = MNR.

## DATA VARIABILITY

|  |       |
|--|-------|
| Supply-chain specific data for GWP-GHG       | >90%  |
| Variation in GWP-GHG(A1-A3) between products | +241% |
| Variation in Ozone depletion pot.            | +172% |
| Variation in Acidification potential         | +234% |
| Variation in EP-freshwater2)                 | +278% |
| Variation in EP-marine                       | +222% |
| Variation in EP-terrestrial                  | +213% |
| Variation in POCP ("smog")3)                 | +218% |
| Variation in ADP-minerals & metals4)         | +114% |
| Variation in ADP-fossil resources            | +241% |
| Variation in Water use5)                     | +205% |
| Variation in GWP-GHG between sites           | N/A   |

## CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the EN 15804:2012+A2:2019 and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

All industrial processes from raw material acquisition and pre-processing, production, product distribution, installation, use of the product and end-of-life management are included. For easier modelling and because of lack of accuracy in available modelling resources some constituents under 0.1% of product mass are excluded. These include some substances which are present in the product only in very small amounts as they have no

significant impact on the emissions. Further, water used for cleaning and maintenance of the equipment, transportation and waste streams of the packaging materials used for delivering the raw materials to the factory are also included. The production of capital equipment, construction activities, and infrastructure, personnel-related activities, energy and water use related to company management and sales activities are excluded.

## ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation.

In this study, as per EN 15804, allocation is conducted in the following order;

1. Allocation should be avoided.
2. Allocation should be based on physical properties (e.g. mass, volume) when the difference in revenue is small.
3. Allocation should be based on economic values.

In this study allocation could not be avoided for some packaging materials, ancillary material, energy consumption and waste production as the information was only measured on factory or production process level. The inputs were allocated to studied product based on annual production volume (mass allocation) and converted to the DU of 1 m<sup>2</sup>.

+ALUMINIUM PROFILE is converted from length to weight based on the manufacturer's provided information.

For example: Code 2200010414 with specifications of 1930kg/1000m. Using 6.865m => The weight of ALUMINIUM PROFILE used is  $6.865 * 1.93$  equal to 13.24945.

+GLASS with a thickness of 1mm, an area of 1m<sup>2</sup> has a weight of 2.5kg.

This LCA study is conducted in accordance with all methodological considerations, such as performance, system boundaries, data quality,

allocation procedures, and decision rules to evaluate inputs and outputs. Allocation used in Ecoinvent 3.8 environmental data sources follow the methodology 'allocation, cut-off by classification'. This methodology is in line with the requirements of ISO 14025, ISO 14044 and the PCR. All estimations and assumptions regarding the cut off criteria and the allocation are declared in the part "Cut-off Criteria except the estimations/assumptions below:- Module A2, A4 & C2: Vehicle capacity utilization volume factor is assumed to be 1 which means full load. It may vary but as the role of transportation emission in total results is small, the variety in load is assumed to be negligible. Empty returns are considered as in the ecoinvent datasets. - Module A4: Transportation does not cause losses as products are packaged properly. Also, volume capacity utilisation factor is assumed to be 1 for the nested packaged products. Additionally, transportation distances are based on a sales volume-based weighted average and a lorry is the assumed vehicle type used. - Module C1: To demolish the building at the end of its life cycle, assume 0.036 MJ/kg of the product. - Module C2: Transportation distance to waste treatment facility is estimated as 100 km and the transportation method is assumed as lorry. - Module C3, C4, D: A portion of recyclable materials such as glass, aluminum, steel, and stainless steel is sent directly to recycling facilities (C3) with specific recycling rates applied, while the remainder is sent to landfill (C4). Losses in the sorting process are assumed to be very small and not considered in the assessment (C3-C4). Benefits of recycling waste generated in module A5 and C3 are taken into account in module D.

The allocations in the Ecoinvent 3.8 datasets used in this study follow the Ecoinvent system model 'Allocation, cut-off, EN15804'.



## ENVIRONMENTAL IMPACT DATA

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks. Note: additional environmental impact data may be presented in annexes.

### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2

| Impact category                     | Unit                   | A1-A3     | A4       | A5       | B1  | B2  | B3  | B4  | B5  | B6  | B7  | C1       | C2       | C3       | C4       | D         |
|-------------------------------------|------------------------|-----------|----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| GWP – total <sup>1)</sup>           | kg CO <sub>2</sub> e   | 1.56E+02  | 2.66E+00 | 8.30E+00 | MND | MND | MND | MND | MND | MND | MND | 7.82E-02 | 1.28E+00 | 1.50E+00 | 3.42E-02 | -1.19E+02 |
| GWP – fossil                        | kg CO <sub>2</sub> e   | 1.64E+02  | 2.66E+00 | 3.23E-01 | MND | MND | MND | MND | MND | MND | MND | 7.82E-02 | 1.28E+00 | 1.50E+00 | 3.42E-02 | -1.19E+02 |
| GWP – biogenic                      | kg CO <sub>2</sub> e   | -7.98E+00 | 1.33E-04 | 7.98E+00 | MND | MND | MND | MND | MND | MND | MND | 1.20E-05 | 7.79E-05 | 0.00E+00 | 0.00E+00 | 3.96E-01  |
| GWP – LULUC                         | kg CO <sub>2</sub> e   | 1.17E-01  | 1.63E-03 | 1.98E-05 | MND | MND | MND | MND | MND | MND | MND | 7.59E-06 | 7.82E-04 | 1.03E-03 | 3.50E-06 | -1.93E-02 |
| Ozone depletion pot.                | kg CFC <sub>11</sub> e | 6.87E-06  | 5.30E-07 | 3.38E-09 | MND | MND | MND | MND | MND | MND | MND | 1.67E-08 | 2.56E-07 | 4.35E-08 | 6.82E-09 | -3.57E-06 |
| Acidification potential             | mol H <sup>+</sup> e   | 1.55E+00  | 1.04E-02 | 2.87E-03 | MND | MND | MND | MND | MND | MND | MND | 8.13E-04 | 3.88E-03 | 5.87E-03 | 3.41E-04 | -1.13E+00 |
| EP-freshwater <sup>2)</sup>         | kg Pe                  | 8.24E-02  | 2.62E-04 | 1.39E-04 | MND | MND | MND | MND | MND | MND | MND | 2.45E-06 | 1.29E-04 | 4.02E-04 | 1.78E-06 | -6.81E-02 |
| EP-marine                           | kg Ne                  | 2.17E-01  | 2.10E-03 | 3.48E-04 | MND | MND | MND | MND | MND | MND | MND | 3.60E-04 | 7.28E-04 | 7.91E-04 | 1.47E-04 | -1.48E-01 |
| EP-terrestrial                      | mol Ne                 | 2.24E+00  | 2.29E-02 | 3.61E-03 | MND | MND | MND | MND | MND | MND | MND | 3.94E-03 | 7.88E-03 | 8.76E-03 | 1.61E-03 | -1.49E+00 |
| POCP (“smog”) <sup>3)</sup>         | kg NMVOCe              | 6.07E-01  | 7.58E-03 | 9.90E-04 | MND | MND | MND | MND | MND | MND | MND | 1.07E-03 | 2.86E-03 | 2.47E-03 | 4.38E-04 | -4.09E-01 |
| ADP-minerals & metals <sup>4)</sup> | kg Sbe                 | 5.82E-04  | 1.48E-05 | 4.00E-07 | MND | MND | MND | MND | MND | MND | MND | 3.65E-08 | 7.31E-06 | 6.36E-05 | 1.60E-08 | -1.43E-04 |
| ADP-fossil resources                | MJ                     | 2.30E+03  | 3.93E+01 | 4.09E+00 | MND | MND | MND | MND | MND | MND | MND | 1.07E+00 | 1.91E+01 | 1.05E+01 | 4.59E-01 | -1.64E+03 |
| Water use <sup>5)</sup>             | m <sup>3</sup> e depr. | 2.58E+01  | 2.26E-01 | 3.33E-02 | MND | MND | MND | MND | MND | MND | MND | 2.63E-03 | 1.11E-01 | 2.36E-01 | 1.17E-03 | -1.18E+01 |

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO<sub>4</sub>e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

### ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2

| Impact category                  | Unit      | A1-A3    | A4       | A5        | B1  | B2  | B3  | B4  | B5  | B6  | B7  | C1       | C2       | C3       | C4       | D         |
|----------------------------------|-----------|----------|----------|-----------|-----|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| Particulate matter               | Incidence | 9.21E-06 | 1.27E-07 | 3.12E-09  | MND | MND | MND | MND | MND | MND | MND | 2.15E-08 | 6.18E-08 | 8.41E-08 | 8.89E-09 | -6.24E-06 |
| Ionizing radiation <sup>6)</sup> | kBq U235e | 9.86E+00 | 1.74E-01 | 8.45E-04  | MND | MND | MND | MND | MND | MND | MND | 4.83E-03 | 8.42E-02 | 4.40E-02 | 1.99E-03 | -7.05E+00 |
| Ecotoxicity (freshwater)         | CTUe      | 1.51E+01 | 8.76E-01 | 1.36E-02  | MND | MND | MND | MND | MND | MND | MND | 5.87E-03 | 4.30E-01 | 1.34E+00 | 2.47E-03 | -5.81E+00 |
| Human toxicity, cancer           | CTUh      | 1.32E-07 | 1.16E-09 | 1.64E-11  | MND | MND | MND | MND | MND | MND | MND | 2.01E-11 | 5.55E-10 | 9.12E-10 | 9.13E-12 | -8.35E-08 |
| Human tox. non-cancer            | CTUh      | 1.41E-05 | 6.72E-08 | -3.93E-09 | MND | MND | MND | MND | MND | MND | MND | 3.22E-10 | 3.32E-08 | 1.37E-07 | 1.67E-10 | -1.20E-05 |
| SQP <sup>7)</sup>                | -         | 3.00E+02 | 1.94E+01 | 4.61E-01  | MND | MND | MND | MND | MND | MND | MND | 2.81E-02 | 9.66E+00 | 2.53E+00 | 1.29E+00 | -1.75E+02 |

6) EN 15804+A2 disclaimer for ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

## USE OF NATURAL RESOURCES

| Impact category                    | Unit           | A1-A3    | A4       | A5        | B1  | B2  | B3  | B4  | B5  | B6  | B7  | C1       | C2       | C3       | C4       | D         |
|------------------------------------|----------------|----------|----------|-----------|-----|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| Renew. PER as energy <sup>8)</sup> | MJ             | 1.33E+02 | 4.16E-01 | 8.67E-01  | MND | MND | MND | MND | MND | MND | MND | 4.65E-03 | 2.05E-01 | 5.83E-01 | 2.14E-03 | -1.24E+01 |
| Renew. PER as material             | MJ             | 6.49E+01 | 1.92E-01 | -2.72E+01 | MND | MND | MND | MND | MND | MND | MND | 1.36E-03 | 9.45E-02 | 5.80E-01 | 1.58E-03 | -1.76E+01 |
| Total use of renew. PER            | MJ             | 1.98E+02 | 6.08E-01 | -2.63E+01 | MND | MND | MND | MND | MND | MND | MND | 6.01E-03 | 2.99E-01 | 1.16E+00 | 3.73E-03 | -2.99E+01 |
| Non-re. PER as energy              | MJ             | 1.78E+03 | 6.47E+00 | 4.04E+00  | MND | MND | MND | MND | MND | MND | MND | 5.96E-02 | 3.19E+00 | 5.61E+00 | 4.81E-02 | -1.44E+03 |
| Non-re. PER as material            | MJ             | 5.22E+02 | 3.29E+01 | 4.95E-02  | MND | MND | MND | MND | MND | MND | MND | 1.01E+00 | 1.59E+01 | 4.86E+00 | 4.11E-01 | -1.96E+02 |
| Total use of non-re. PER           | MJ             | 2.30E+03 | 3.93E+01 | 4.09E+00  | MND | MND | MND | MND | MND | MND | MND | 1.07E+00 | 1.91E+01 | 1.05E+01 | 4.59E-01 | -1.64E+03 |
| Secondary materials                | kg             | 2.18E+00 | 3.64E-02 | 2.67E-01  | MND | MND | MND | MND | MND | MND | MND | 7.88E-04 | 1.78E-02 | 1.23E+01 | 3.52E-04 | 1.09E+01  |
| Renew. secondary fuels             | MJ             | 4.86E-01 | 4.24E-03 | 7.65E-05  | MND | MND | MND | MND | MND | MND | MND | 7.51E-05 | 2.08E-03 | 3.17E-03 | 4.51E-05 | -8.97E-02 |
| Non-ren. secondary fuels           | MJ             | 1.82E+00 | 9.50E-03 | 1.38E-03  | MND | MND | MND | MND | MND | MND | MND | 1.20E-04 | 4.67E-03 | 2.03E-02 | 5.64E-05 | -1.02E+00 |
| Use of net fresh water             | m <sup>3</sup> | 6.24E-01 | 5.59E-03 | 8.26E-04  | MND | MND | MND | MND | MND | MND | MND | 6.22E-05 | 2.75E-03 | 5.60E-03 | 2.80E-05 | -2.91E-01 |

8) PER = Primary energy resources

## END OF LIFE – WASTE

| Impact category     | Unit | A1-A3    | A4       | A5       | B1  | B2  | B3  | B4  | B5  | B6  | B7  | C1       | C2       | C3       | C4       | D         |
|---------------------|------|----------|----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| Hazardous waste     | kg   | 3.98E+02 | 1.38E+00 | 7.03E-01 | MND | MND | MND | MND | MND | MND | MND | 1.16E-02 | 6.80E-01 | 2.71E+00 | 8.61E-03 | -3.24E+02 |
| Non-hazardous waste | kg   | 1.32E+01 | 1.16E+00 | 6.90E-01 | MND | MND | MND | MND | MND | MND | MND | 7.89E-04 | 5.76E-01 | 1.11E+00 | 3.76E-04 | -9.19E+00 |
| Radioactive waste   | kg   | 8.96E-02 | 5.98E-04 | 5.17E-06 | MND | MND | MND | MND | MND | MND | MND | 1.23E-05 | 2.92E-04 | 3.74E-04 | 5.22E-06 | -6.54E-02 |

## END OF LIFE – OUTPUT FLOWS

| Impact category          | Unit | A1-A3    | A4       | A5       | B1  | B2  | B3  | B4  | B5  | B6  | B7  | C1       | C2       | C3       | C4        | D         |
|--------------------------|------|----------|----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|----------|----------|-----------|-----------|
| Components for re-use    | kg   | 5.58E-18 | 4.06E-20 | 5.44E-20 | MND | MND | MND | MND | MND | MND | MND | 4.64E-22 | 1.91E-20 | 2.02E-20 | -5.45E-23 | -4.26E-18 |
| Materials for recycling  | kg   | 1.03E+00 | 2.78E-02 | 2.02E-04 | MND | MND | MND | MND | MND | MND | MND | 4.93E-04 | 1.35E-02 | 1.09E+01 | 2.26E-04  | -3.22E-01 |
| Materials for energy rec | kg   | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  | 0.00E+00  |
| Exported energy          | MJ   | 0.00E+00 | 0.00E+00 | 1.48E+01 | MND | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  | 0.00E+00  |

## ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

| Impact category        | Unit                 | A1-A3    | A4       | A5       | B1  | B2  | B3  | B4  | B5  | B6  | B7  | C1       | C2       | C3       | C4       | D         |
|------------------------|----------------------|----------|----------|----------|-----|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| GWP-GHG <sup>10)</sup> | kg CO <sub>2</sub> e | 1.64E+02 | 2.66E+00 | 3.23E-01 | MND | MND | MND | MND | MND | MND | MND | 7.82E-02 | 1.28E+00 | 1.50E+00 | 3.42E-02 | -1.19E+02 |

10) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013). In addition, the characterisation factors for the flows - CH<sub>4</sub> fossil, CH<sub>4</sub> biogenic and Dinitrogen monoxide - were updated in line with the guidance of IES PCR 2019:14 Construction products, version 1.3.4 Annex 1. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO<sub>2</sub> is set to zero.

## SCENARIO DOCUMENTATION

### Manufacturing energy scenario documentation

| Scenario parameter                       |  | Value   |
|--|--|---|
| Grid electricity (*)                     | Electricity data source and quality    | Ecoinvent 3.8: electricity, medium voltage (market for electricity, medium voltage   electricity, medium voltage   EN15804) (Vietnam) |
|  | Electricity kg CO <sub>2</sub> e / kWh | 0.562   |
| Company-owned rooftop solar              | Electricity data source and quality    | Ecoinvent 3.8: electricity production, photovoltaic, 3kWp flat-roof installation, multi-Si - RoW - electricity, low voltage (Vietnam) |
|  | Electricity kg CO <sub>2</sub> e / kWh | 0.0713  |
| District heating data source and quality |  | NA  |
| District heating CO <sub>2</sub> e / kWh |  | NA  |

(\*) Vietnam doesn't calculate the residual mix like the EU and doesn't have a Guarantees of Origin system. Therefore, it's not possible to subtract renewables from the consumption mix, and the residual mix is the same as the consumption mix.

### Transport scenario documentation (A4)

| Scenario parameter   | Value |
|--|-------|
| Specific transport CO <sub>2</sub> e emissions, kg CO <sub>2</sub> e / tkm | 0.545 |
| Average transport distance, km   | 194   |
| Capacity utilization (including empty return) %                            | 100%  |
| Volume capacity utilization factor   | 1     |

### Installation scenario documentation (A5)

| Scenario parameter  | Value |
|---|-------|
| Average electricity used during installation of 1m2 of product, kWh | 0.587 |
| Electricity kg CO <sub>2</sub> e / kWh                              | 0.562 |

### End of life scenario documentation

| Scenario parameter   |                             | Value |
|--|-----------------------------|-------|
| Energy to demolish the building at the end of its life cycle, MJ/kg              |                             | 0.036 |
| Specific transport CO <sub>2</sub> e emissions, kg CO <sub>2</sub> e / tkm       |                             | 0.545 |
| Average transportation distance for end-of-life waste disposal, km               |                             | 100   |
| Capacity utilization (including empty return) %                                  |                             | 100%  |
| Volume capacity utilization factor   |                             | 1     |
| Mass ratio of end-of-life waste processing: Recycling % (C3) and Landfill % (C4) | Glass                       | 30:70 |
|  | Aluminium                   | 95:5  |
|  | Steel                       | 95:5  |
|  | Stainless Steel             | 95:5  |
|  | PP Plastic                  | 0:100 |
|  | Rubber                      | 0:100 |
|  | Silicone                    | 0:100 |
|  | Rockwool                    | 0:100 |
| Collection process specified by type   | kg collected separately     | 10.89 |
|  | kg mixed construction waste | 12.74 |
|  | kg for re-use               | 0     |

|                              |   |       |
|------------------------------|---|-------|
| Recovery system specified by | kg for recycling                            | 10.89 |
|                              | kg for energy recovery                      | 0     |
| Disposal specified by type   | kg product or material for final deposition | 12.74 |

## BIBLIOGRAPHY

ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations. Principles and procedures.

ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.

ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines.

EN 15804:2012+A2:2019 Sustainability in construction works – Environmental product declarations – Core rules for the product category of construction products.

Int'l EPD System PCR 2019:14 Construction products, version 1.3.4 (2024-04-30)

Int'l EPD System c-PCR-007, Windows and doors, version 2024-04-30

EPD International (2021). General Programme Instructions of the international EPD® system. Version 4.0. [www.environdec.com](http://www.environdec.com)

## CONTACT INFORMATION

### Owner of the EPD

#### **QUAN DAT TRADING AND PRODUCTION COMPANY LIMITED**

536 Quang Trung, Ward 11  
Go Vap District, Ho Chi Minh City  
Vietnam  
Place of production:  
No. 85A, DT748 Street, An Dien  
Ward,  
Ben Cat City, Binh Duong Province,  
Vietnam  
project@quandat.com.vn  
+(84.28) 7303 0678  
www.quandat.com.vn

### LCA Practitioner

#### **SIS CERT COMPANY LIMITED**

14th Floor, HM TOWN Building, 412  
Nguyen Thi Minh Khai, Ward 05  
District 3, Ho Chi Minh City  
Vietnam  
Info@isosig.com  
+(84.28) 38881987  
www.isosig.com

### Programme Operator



THE INTERNATIONAL EPD<sup>®</sup> SYSTEM  
**EPD International AB**  
Box 210 60  
100 31 Stockholm  
Sweden  
www.environdec.com



THE INTERNATIONAL EPD SYSTEM  
**EPD Southeast Asia**  
Kencana Tower, Level M  
Business Park Kebon Jeruk  
Jl Raya Meruya Ilir No. 88  
Jakarta Barat 11620  
Indonesia  
admin@epd-southeastasia.com  
(+62) 899-9000-055  
www.epd-southeastasia.com