

Environmental Product Declaration



THE INTERNATIONAL EPD® SYSTEM



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Krystol Internal Membrane™ (KIM®)

from

Kryton International Inc.



Programme:

Programme operator:

EPD registration number:

Publication date:

Revision date:

Valid until:

The International EPD® System, www.environdec.com

EPD International AB; EPD is registered through aligned regional licensee; EPD North America (www.epdna.com)

EPD-IES-0015766

2024-07-26

2024-09-09 (version 1.1)

2029-07-26


An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme information

| | |
|-------------------|---|
| Programme: | The International EPD® System |
| Address: | EPD International AB Box 210 60 SE-100 31 Stockholm Sweden |
| Website: | www.environdec.com |
| E-mail: | info@environdec.com |

| |
|---|
| Accountabilities for PCR, LCA and independent, third-party verification |
| Product Category Rules (PCR) |
| CEN standard EN 15804 serves as the Core Product Category Rules (PCR) |
| Product Category Rules (PCR): <i>PCR for Construction Products, PCR2019:14 version 1.3.3</i> |
| <i>PCR review was conducted by: The Technical Committee of the International EPD System. See www.environdec.com for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact</i> |
| Life Cycle Assessment (LCA) |
| LCA accountability: Rob Sianchuk, Rob Sianchuk Consulting |
| Third-party verification |
| Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: |
| <input checked="" type="checkbox"/> EPD verification by individual verifier |
|  |
| Third-party verifier: Thomas Gloria, Industrial Ecology Consultants LLC |
| Approved by: The International EPD® System |
| Procedure for follow-up of data during EPD validity involves third party verifier: |
| <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD: Kryton International Inc.

Contact: info@kryton.com

Description of the organization: Kryton was founded in 1973 and has grown to be a worldwide leader in concrete waterproofing and durability. Kryton revolutionized the industry by inventing the first waterproofing admixture, Krytol Internal Membrane (KIM) in 1983.

Product-related or management system-related certifications:

- Health and Environmental
 - REACH and UK REACH Registered
 - NSF - Certified to NSF/CAN/ANSI Standard 61
 - Singapore Green Label
 - Hong Kong - Gold Status
- Quality
 - CE and UKCA Marked
 - British Board of Agrément (UK): Certificate 05/4217
 - British Board of Agrément (UK): Factory Production Control 0836-CRP-14/F086
 - KIWA GmbH (Germany): Factory Production Control 0770-CRP-21DE-02410_A
 - Dubai: Certificate of Product Conformity CL18020646
 - BRANZ (New Zealand) - Appraisal No 661

Name and location of production site(s): Kryton International Inc.
1645 East Kent Ave N
Vancouver, BC
V5P 2S8

ATLANTA, GA, USA
55 ALLEN PLAZA



The below grade walls were built from the top down, using single-sided forming against the dirt. The developer used KIM to waterproof because the shoring wall did not leave room for installing conventional membranes.

“Kryton is a great team to work with, and we are extremely impressed with their waterproofing products. Their products do what they promise to do. Even though there’s water behind the walls, it’s not leaking through the concrete because of Kryton’s crystalline technology.”

- Rick Anderson, President of ABE Enterprises

Product information

Product name: Krystol Internal Membrane™ (KIM®)


Product identification:

KIM is a grey powder with a bulk density of ~1.0-1.1 kg/m³ (loose) and ~1,400 kg/m³ (settled). KIM is conveniently available in 5 kg (11 lbs) and 25 kg (55 lbs) re-sealable pails as well as pulpable mixer-ready bags in standard and custom sizes to match your mix design. The specification of the KIM product follows the standards listed below:

- ASTM C494 – Type S
- EN 934-2 – Table 8
- ACI 212-Chapter 15 - Permeability Reducing Admixture for Hydrostatic Conditions (PRAH)

UN CPC code: 375

Geographical scope: Canada (A1-A3), and Global (C and D)

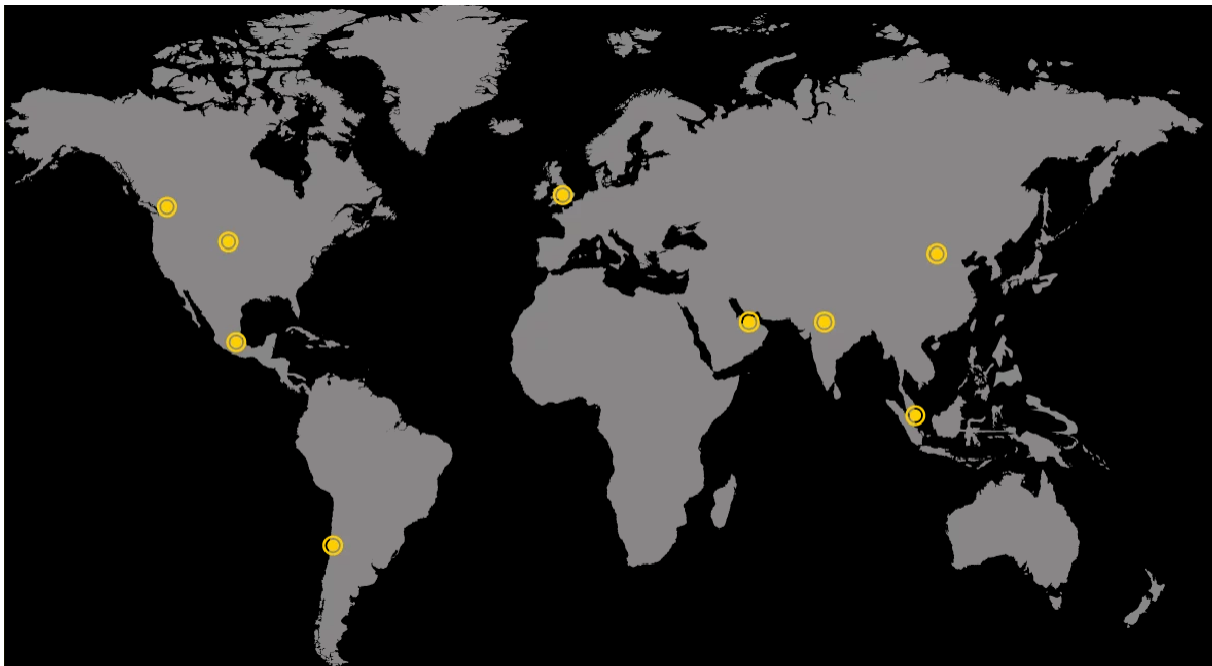


KRYTON'S GLOBAL NETWORK

Kryton headquarters are in Canada with 10 regional offices in China, India, Mexico, Singapore, UAE, USA and UK. Our regional offices provide technical and sales support to our entire distribution network.

Product description:

The KIM product considered in this study is an admixture specified in concrete mix designs for waterproofing and protection by growing a protective crystalline network throughout the concrete's pores, capillaries, cracks, and micro-cracks. Long-term reactivity provides adaptive self-sealing and self-healing properties that counteract deterioration and allow concrete to maintain its integrity. The recommended uses of KIM include:

- Water and Wastewater Structures
- Transportation Infrastructure
- Dams, spillways and power stations
- Marine Structures
- Tunnels
- Pipes, manholes and pump stations
- Parking Structures
- Foundations, basements
- Elevator pits
- Pre-cast and shotcrete
- Secondary containment
- Pools and fountains

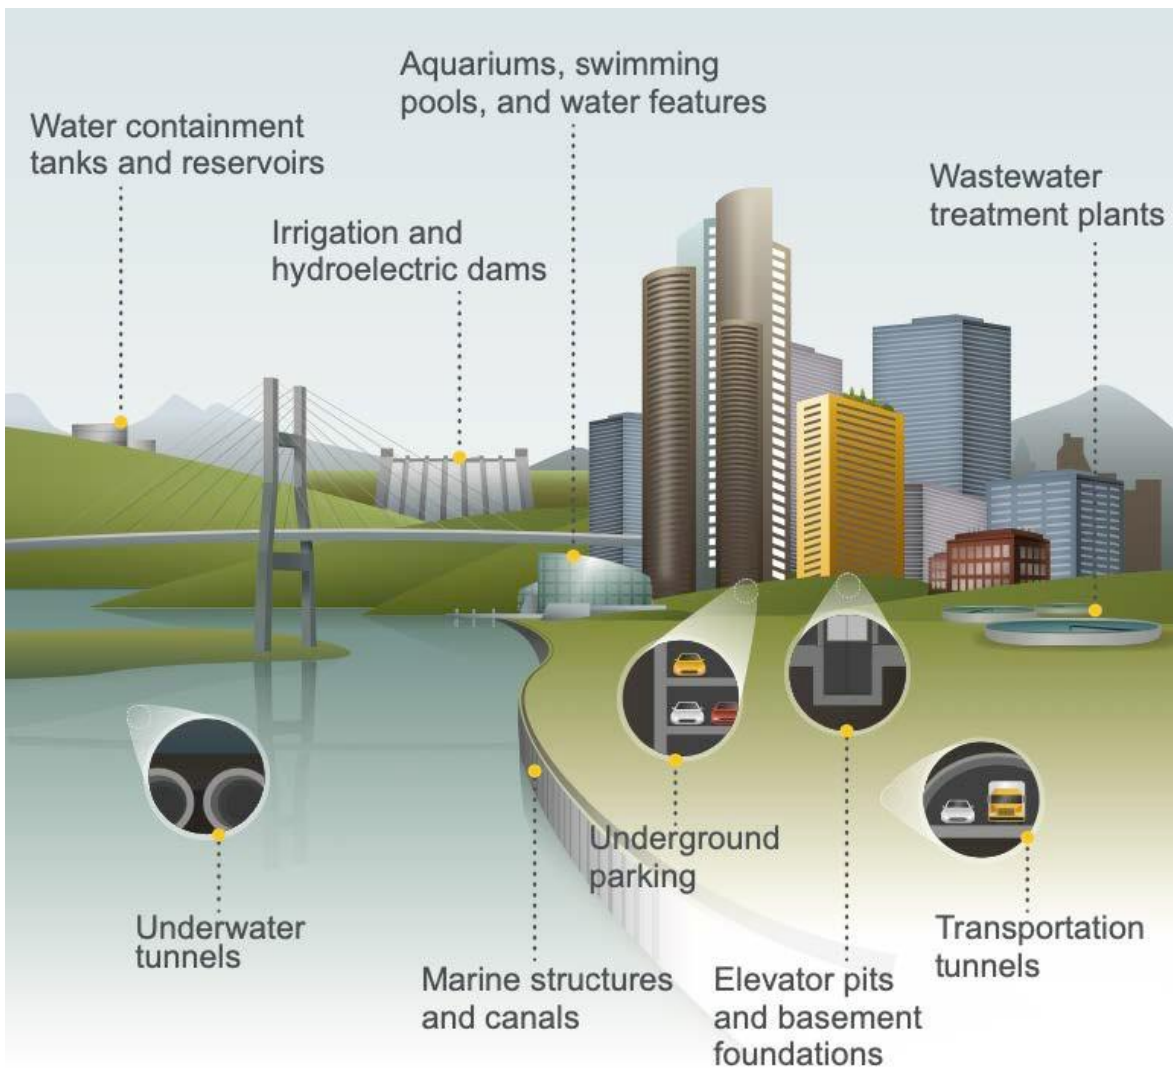

LCA information

Declared unit: 1 kg of KIM product


Reference service life: N/A

Time representativeness: 12-month production period spanning January 2023 to December 2023.

Database(s) and LCA software used: ecoinvent 3.9.1 (EN15804 add-on by GreenDelta) and openLCA 2.1.0

Description of system boundaries: Cradle to gate with modules C1–C4 and module D (A1–A3 + C + D).

System diagram:

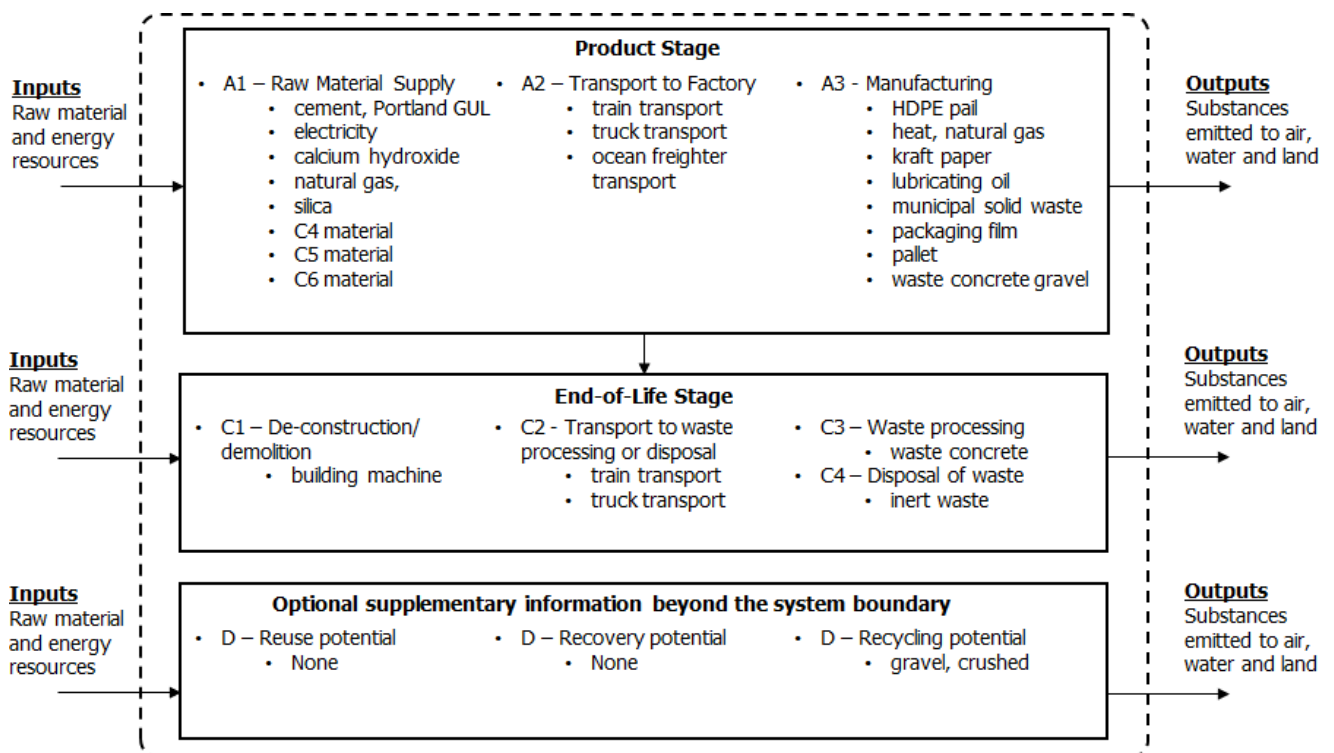

Transparency on electricity in A3: For electricity used in the manufacturing process, the energy source mix is 86.5% hydropower, 5.7% natural gas, 3.7% wind energy, 1.1% brown coal, 0.9% nuclear, 0.8% biomass, 0.8% black coal, 0.2% geothermal, 0.1% oil product, 0.1% solar energy. The GWP-GHG indicator result of the background activity dataset 'market for electricity, low voltage' for 2019 CA-BC is 0.09 kg CO₂ eq/kWh.

Scenarios and additional technical information:

- C1 - De-construction/demolition
 - Deconstruction, including dismantling or demolition, of the product from the building, including initial on-site sorting of the materials is assumed as 0.0437 MJ per kg KIM.
- C2 - Transport to waste processing or disposal
 - Transportation of the discarded product as part of the waste processing, e.g. to a recycling site and transportation of waste e.g. to final disposal

| Transport mode | Fuel Type | Distance (km) |
|--------------------|-----------|---------------|
| Transport by truck | Diesel | 20 |
| Transport by train | Diesel | 50 |

- C3 - Waste processing
 - Waste processing, including collection of waste fractions from the deconstruction and waste processing of material flows intended for reuse, recycling and energy recovery – 58% recovery for recycling by dry sorting at a plant for building wastes with pre-sorting of mixed waste, crushing and manual sorting.
- C4 - Disposal
 - Waste disposal, including physical pre-treatment and management of the disposal site – 42% collected with mixed construction waste, disposed as inert waste.
- D - Optional supplementary information beyond the system boundary
 - Potential benefits and loads from reuse, recovery, recycling – Estimate quality and net output flow of recycled KIM product substitute for gravel, assuming no material losses between the point of end-of-waste state and point of substitution, and using current average technologies and practice.

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

| | Product stage | | | Construction process stage | | Use stage | | | | | | | End of life stage | | | | Resource recovery stage |
|----------------------|---------------------|-----------|---------------|----------------------------|---------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|-------------------------|
| | Raw material supply | Transport | Manufacturing | Transport | Construction installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | |
| Module | A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| Modules declared | X | X | X | *ND | ND | ND | ND | ND | ND | ND | ND | ND | X | X | X | X | X |
| Geography | CA, GLO | GLO | CA, GLO | | | | | | | | | | GLO | | | | GLO |
| Specific data used | >90% | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Variation – products | | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Variation – sites | Not applicable | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

Content information

| Product components | Weight, kg | Post-consumer material, weight-% | Biogenic material, weight-% and kg C/kg |
|---------------------|------------|----------------------------------|---|
| Portland GUL cement | 0.28-0.40 | 0 | 0 |
| Calcium hydroxide | 0.05-0.20 | 0 | 0 |
| Silica, quartz | 0.40-0.50 | 0 | 0 |
| C4 material | 0.05-0.20 | 0 | 0 |
| C5 material | 0-0.10 | 0 | 0 |
| C6 material | 0-0.10 | 0 | 0 |
| TOTAL | 1.00 | 0 | 0 |
| Packaging materials | Weight, kg | Weight-% (versus the product) | Weight biogenic carbon, kg C/kg |
| Kraft bags | 0.00770 | 1% | 0.00322 |
| HDPE pails | 0.00671 | 1% | 0.00000 |
| Pallets | 0.01560 | 2% | 0.00736 |
| TOTAL | 0.03001 | 3% | 0.01058 |

Dangerous substances from the Candidate List of Substances of Very High Concern (SVHC) - This product does not contain any substances in the Candidate List of SVHC which exceeds the limits for registration with the European Chemicals Agency (i.e. in amounts greater than 0.1% of the weight of the product).

VANCOUVER, BC, CANADA 700 WEST 8TH



KIM was added to the shotcrete mix used to waterproof the concrete perimeter walls.

“Using Kryton’s KIM in the shotcrete as the concrete waterproofer helped us complete the project on time with a fast-paced schedule. Due to our success on 700 West 8th, we have been using Kryton’s Krystol Waterproofing System on a variety of other projects in different parts of the Lower Mainland of BC.”

- Bryan Tucker, VP of Construction for ICON Pacific

Results of the environmental performance indicators

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks. The use of the results of modules A1-A3 should not be used without considering the results of module C.

Mandatory impact category indicators according to EN 15804 (based on EF 3.0)

| Results per declared unit | | | | | | | |
|----------------------------------|---|-----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | A1-A3 | C1 | C2 | C3 | C4 | D |
| GWP-fossil | kg CO ₂ eq. | 6.91E-01 | 4.44E-03 | 3.53E-03 | 3.65E-03 | 4.13E-03 | -6.10E-03 |
| GWP-biogenic | kg CO ₂ eq. | -5.94E-04 | 1.16E-06 | 5.92E-06 | 3.22E-03 | 4.37E-06 | -1.84E-05 |
| GWP-luluc | kg CO ₂ eq. | 5.23E-04 | 4.87E-07 | 1.16E-05 | 6.83E-06 | 6.40E-06 | -5.93E-06 |
| GWP-total | kg CO ₂ eq. | 6.91E-01 | 4.44E-03 | 3.55E-03 | 6.87E-03 | 4.14E-03 | -6.12E-03 |
| ODP | kg CFC 11 eq. | 5.92E-09 | 6.90E-11 | 5.68E-11 | 4.69E-11 | 9.75E-11 | -5.48E-11 |
| AP | mol H ⁺ eq. | 3.06E-03 | 4.02E-05 | 1.91E-05 | 2.10E-05 | 2.71E-05 | -3.64E-05 |
| EP-freshwater | kg P eq. | 1.42E-04 | 1.33E-07 | 3.56E-07 | 1.06E-06 | 3.62E-07 | -2.00E-06 |
| EP-marine | kg N eq. | 7.21E-04 | 1.86E-05 | 7.34E-06 | 6.43E-06 | 1.04E-05 | -8.61E-06 |
| EP-terrestrial | mol N eq. | 7.58E-03 | 2.03E-04 | 7.81E-05 | 6.79E-05 | 1.11E-04 | -1.03E-04 |
| POCP | kg NMVOC eq. | 2.46E-03 | 6.00E-05 | 2.54E-05 | 2.17E-05 | 3.80E-05 | -2.90E-05 |
| ADP-minerals&metals ¹ | kg Sb eq. | 8.79E-07 | 1.34E-09 | 7.93E-09 | 1.21E-08 | 6.42E-09 | -2.95E-08 |
| ADP-fossil ¹ | MJ | 5.68E+00 | 5.16E-02 | 4.42E-02 | 4.97E-02 | 7.62E-02 | -7.03E-02 |
| WDP ¹ | m ³ | 2.21E-01 | 2.26E-04 | 6.05E-04 | 1.55E-03 | 3.22E-03 | -9.35E-03 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | |

Additional mandatory impact category indicators according to EN 15804

| Results per declared unit | | | | | | | |
|---------------------------|--|----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | A1-A3 | C1 | C2 | C3 | C4 | D |
| GWP-GHG ² | kg CO ₂ eq. | 6.92E-01 | 4.44E-03 | 3.54E-03 | 3.65E-03 | 4.14E-03 | -6.10E-03 |
| ETP-fw ¹ | CTUe | 1.08E+01 | 4.62E-02 | 6.44E-02 | 7.19E-02 | 8.04E-02 | -1.23E-01 |
| HTP-c ¹ | CTUh | 2.49E-10 | 1.35E-12 | 2.08E-12 | 1.82E-12 | 1.97E-12 | -4.96E-12 |
| HTP-nc ¹ | CTUh | 5.37E-09 | 2.93E-11 | 5.11E-11 | 4.63E-11 | 5.21E-11 | -1.07E-10 |
| IRP ³ | kBq U-235 eq | 1.02E-02 | 2.69E-05 | 5.56E-05 | 2.07E-04 | 6.50E-05 | -6.05E-04 |
| SQP ¹ | Pt | 7.03E+00 | 3.90E-03 | 3.32E-02 | 6.72E-02 | 1.44E-01 | -1.31E-01 |
| PM | disease inc. | 2.77E-08 | 1.11E-09 | 3.03E-10 | 2.63E-09 | 5.35E-10 | -5.01E-10 |
| Acronyms | ETP-fw = Ecotoxicity, freshwater, HTP-c = Human toxicity, cancer effects, HTP-nc = Human toxicity, non-cancer effects, IRP = Ionising radiation, SQP = Land use, PM = Particulate matter | | | | | | |

¹ Disclaimer - The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

² This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.

³ Disclaimer - This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Additional voluntary impact category indicators according to TRACI 2.1

| Results per declared unit | | | | | | | |
|---------------------------|---|----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | A1-A3 | C1 | C2 | C3 | C4 | D |
| GWP 100 | kg CO ₂ eq | 6.79E-01 | 4.29E-03 | 3.42E-03 | 3.50E-03 | 3.91E-03 | -5.82E-03 |
| ODP | kg CFC-11 eq | 6.58E-09 | 7.41E-11 | 6.31E-11 | 6.01E-11 | 1.06E-10 | -7.95E-11 |
| EP | kg N eq | 1.31E-03 | 3.63E-06 | 4.05E-06 | 9.17E-06 | 4.65E-06 | -1.65E-05 |
| AP | kg SO ₂ eq | 2.60E-03 | 3.71E-05 | 1.72E-05 | 1.85E-05 | 2.44E-05 | -3.13E-05 |
| POCP | kg O ₃ eq | 4.32E-02 | 1.18E-03 | 4.50E-04 | 3.90E-04 | 6.43E-04 | -5.12E-04 |
| Acronyms | GWP 100 = Global warming potential, ODP = Ozone depletion potential, EP = Eutrophication potential, AP = Acidification potential, POCP = Photochemical oxidant creation potential | | | | | | |

Resource use indicators

| Results per declared unit | | | | | | | |
|---------------------------|--|----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | A1-A3 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 5.76E+00 | 5.20E-02 | 4.46E-02 | 5.01E-02 | 7.68E-02 | -7.10E-02 |
| PERM | MJ | 4.19E-01 | 5.22E-03 | 4.00E-03 | 3.12E-03 | 7.43E-03 | -2.45E-03 |
| PERT | MJ | 6.18E+00 | 5.72E-02 | 4.86E-02 | 5.32E-02 | 8.42E-02 | -7.35E-02 |
| PENRE | MJ | 1.39E+00 | 3.23E-04 | 8.67E-04 | 3.24E-03 | 9.09E-04 | -6.49E-03 |
| PENRM | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| PENRT | MJ | 1.39E+00 | 3.23E-04 | 8.67E-04 | 3.24E-03 | 9.09E-04 | -6.49E-03 |
| SM | kg | 1.32E-02 | 3.30E-05 | 4.82E-05 | 5.48E-05 | 4.92E-05 | -2.34E-04 |
| RSF | MJ | 1.91E-03 | 3.64E-06 | 5.98E-06 | 1.49E-05 | 8.46E-06 | -7.50E-05 |
| NRSF | MJ | 4.10E-03 | 9.85E-06 | 3.26E-05 | 7.80E-05 | 2.83E-05 | -2.04E-04 |
| FW | m ³ | 4.52E-03 | 3.06E-06 | 1.10E-05 | 3.15E-05 | 7.06E-05 | -2.07E-04 |
| Acronyms | PERE - Use of renewable primary energy excluding renewable primary energy resources used as raw materials, PERM = Use of renewable primary energy resources used as raw materials, PERT = Total use of renewable primary energy resources, PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials, PENRM = Use of non-renewable primary energy resources used as raw materials, PENRT = Total use of non-renewable primary energy resources, SM = Use of secondary materials, RSF = Use of renewable secondary fuels, NRSF = Use of non-renewable secondary fuels, FW = Use of net fresh water | | | | | | |

Waste and Output flow indicators

| Results per declared unit | | | | | | | |
|---------------------------|--|----------|----------|----------|----------|----------|-----------|
| Indicator | Unit | A1-A3 | C1 | C2 | C3 | C4 | D |
| HWD | kg | 8.20E-03 | 4.75E-05 | 7.48E-05 | 1.20E-04 | 7.52E-05 | -3.06E-04 |
| NHWD | kg | 9.61E-02 | 3.52E-05 | 2.75E-03 | 7.45E-02 | 4.20E-01 | -9.56E-04 |
| RWD | kg | 2.49E-06 | 6.22E-09 | 1.33E-08 | 5.02E-08 | 1.54E-08 | -1.47E-07 |
| CRU | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| MR | kg | 4.97E-03 | 2.72E-05 | 3.82E-05 | 4.62E-05 | 3.99E-05 | -1.86E-04 |
| MER | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| EEE | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| EET | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Acronyms | HWD = Hazardous waste disposed, NHWD = Non-hazardous waste disposed, RWD = Radioactive waste disposed, CRU = Components for re-use, MR = Material for recycling, MER = Materials for energy recovery, EEE = Exported energy, electricity, EET = Exported energy, thermal | | | | | | |

Additional environmental information

Project service life - The use of KIM admixture in concrete mixes may provide long term environmental benefits not considered in the system boundaries of this EPD. The effects of climate change are projected to accelerate the deterioration mechanisms of concrete, especial those related to cracking, micro-cracking, chloride ingress and corrosion. KIM admixture will increase durability and may therefore provide significant whole lifecycle sustainability benefits by extending service life and reducing the need for future repairs.

Effects on durability - KIM admixture has been shown to provide a number of benefits that can be projected to increase durability and reduce the total environmental impact of the concrete over its lifecycle. These benefits include greatly reduced water permeability^{4, 5, 6}, reduced shrinkage and cracking^{4, 6}, sealing of shrinkage cracks up to 0.5mm against leakage^{6, 7}, sealing and healing of microcracks⁸, reduced corrosion rates⁵, reduced effects of alkali silica reaction⁸, and enhanced resistance to freezing conditions^{4, 5}. Additionally, KIM admixture was included in an independent long term field study conducted in the tidal zone of Honolulu harbor using a variety of different admixtures. The results confirmed that KIM provides class leading protection in this environment.⁹

Project optimization - In some cases, the use of durability enhancing admixtures such as KIM may allow other protective systems (such as sealers or coatings) to be eliminated from the project, reducing the materials, VOC emissions and labour required to install them. In cases where the concrete no longer needs to have a coating or membrane applied to the surface, the concrete for that project will be more suitable for recycling at the end of its service life. Eliminating a membrane may also reduce the site disturbance required by eliminating the need to over-excavate the site to accommodate surface applied materials.

Concrete mix optimization - Admixtures may provide a large performance benefit to the concrete relative to their usage level and environmental impact as published in an EPD. Users should consider the opportunity to use KIM (and other admixtures) to maintain durability when developing lower carbon concrete mixes.

Reduced project waste - When provided in mixer ready bags, KIM results in no packaging waste. The HDPE pails are recyclable, highly durable and are often re-purposed by construction personal for site use.

LEED (Leadership in Energy and Environmental Design) – KIM may help contribute to a number of LEED credits in several categories. Consult the manufacturer and your LEED professional to identify potential LEED contributions.

⁴British Board of Agrément (BBA), ⁵University of Victoria, ⁶British Columbia Institute of Technology, ⁷Cement and Concrete Institute of Sweden (CBI), ⁸University of Ottawa, ⁹University of Hawaii

Differences versus previous versions

This is the second version of the Krystol Internal Membrane™ (KIM®) EPD. Editorial changes were made to the EPD layout.

References

EN 15804:2012+A2:2019 E “Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products”

International EPD® System, 2021. General Programme Instructions for the International EPD System, version 4.0

International EPD® System, 2021. PCR 2019:14 Construction products, version 1.11

ISO 14040:2006 “Environmental management – Life cycle assessment – Principles and framework”

ISO 14044:2006 “Environmental management – Life cycle assessment – Requirements and guidelines”

ISO 14025:2006 “Environmental labels and declarations – Type III environmental declarations – Principles and procedures”

Rob Sianchuk Consulting, 2024. Project report: Life cycle assessment of Krystol Internal Membrane (KIM) version 1.1

