

# Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

## UK Average CEM I

from

## Mineral Products Association (MPA) UK



Programme:	The International EPD® System, <a href="http://www.environdec.com">www.environdec.com</a>
Programme operator:	EPD International AB
EPD registration number:	S-P-05824
Publication date:	2022-04-13
Valid until:	2027-04-13

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)*



## General information

### Programme information

<b>Programme:</b>	The International EPD® System
<b>Address:</b>	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
<b>Website:</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>E-mail:</b>	<a href="mailto:info@environdec.com">info@environdec.com</a>

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product category rules (PCR): PCR 2019:14 – Construction Products – Version 1.11 c-PCR-001 Cement and building limes (EN 16908)
PCR review: This PCR was developed within CEN standardisation, and adopted as a c-PCR by the International EPD® System. There was thus no additional open consultation period and no additional review in addition to those within standardisation.
Independent third-party verification of the declaration and data, according to ISO 14025:2006:  <input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification
Third party verifier: Angela Schindler, Umweltberatung, Salem, Germany
Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier:  <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

## Company information

Owner of the EPD: Mineral Products Association (MPA) UK

<https://mineralproducts.org/>

Contact: Dr Rachel Capon (rachel.capon@mineralproducts.org)

Description of the organisation: MPA is the industry trade association for the aggregates, asphalt, cement, concrete, dimension stone, lime, mortar and silica sand industries. MPA represents the vast majority of UK mineral products operating companies across its 14 product groups. These include most of the independent SME quarrying companies throughout the UK, as well as the 9 major international and global companies. MPA covers 100% of UK cement and lime production, 90% of GB aggregates production, 95% of asphalt and over 70% of ready-mixed concrete and precast concrete production.

Product-related or management system-related certifications: MPA is a trade association. Data has been provided by MPA members, who have one or more of the following certifications: ISO 9001, ISO 14001, ISO 50001, ISO 45001, BES 6001, under which data has been collated.

Name and location of production site(s):

MPA is the industry trade association which represents 100% of UK cement production and all five UK cement producers. Data has been collected from the following members' production sites.

**Aggregate Industries:** Clinker and cement production: Cauldon, Cookstown

**Breedon:** Clinker and cement production: Hope

**CEMEX UK:** Clinker and cement production: Rugby, South Ferriby (Note: South Ferriby cement works ceased production in April 2020 and is now mothballed); Cement grinding and blending: Tilbury

**Hanson UK:** Clinker and cement production: Ketton, Padeswood, Ribblesdale

**Tarmac:** Clinker and cement production: Aberthaw, Dunbar, Tunstead;  
Cement blending only: Scotash, Seaham, West Thurrock

## Product information

Product name: UK average CEM I Portland cement

Product identification: CEM I according to BS EN 197 Part 1

Product description: Cement is a hydraulic binder. It is a finely ground inorganic material which, when mixed with water, forms a paste which sets and hardens by means of hydration reactions and processes. After hardening, it retains its strength and stability even under water.

The declared cement is a sector average CEM I Portland cement, consisting of:

MPA UK average clinker: 90.775 %

*MPA members are responsible for 100% of clinker production in the UK. The MPA UK average clinker is based on aggregated data from MPA member clinker and cement production sites.*

*The components of clinker are mainly calcium oxide (CaO) and silica (SiO<sub>2</sub>), and small amounts of aluminium oxide (Al<sub>2</sub>O<sub>3</sub>) and iron oxide (Fe<sub>2</sub>O<sub>3</sub>).*

Gypsum: 5.000 % *added to control the setting time of the cement.*

Limestone: 4.000 %

Additives (ferrous sulphate, grinding aids): <1%

The declared cement is a sector representative UK CEM I modelled using aggregated data from all MPA member sites which manufacture clinker and cement, or grind and blend cement, or blend cement. It covers 100% of CEM I produced in the UK. UK produced cement accounts for around 80% of the UK cement market. (The remaining 20% is accounted for by imports by both MPA members and non-members).

This declared CEM I cement is a representative average which is not available for purchase on the market. For LCA information for a specific market CEM I, please contact the individual MPA member manufacturer.

UN CPC code: 3744 Cement

Other codes for product classification: Not applicable

## LCA information

Geographical scope: United Kingdom

Functional unit / declared unit: 1 tonne

Reference service life: not applicable

Time representativeness: All material and energy flows within the scope of the study are based on the plant specific data collected for the year 2020.


Database(s) and LCA software used: The LCA software used is the GCCA EPD tool, version 3.1. The GCCA tool uses the ecoinvent database version 3.5 together with GCCA custom emission factors for processes not included in the ecoinvent database, notably cement kiln processes. The LCI methodology is described in detail in the reference document "GCCA Industry EPD Tool for Cement and Concrete (v3.1) - LCA Model, International Version".

Description of system boundaries:

The EPD type is "Cradle to gate" (A1–A3). This system includes the extraction and production of raw materials, transportation of raw materials to the cement plant, cement manufacturing process (including on-site transportation) and treatment of waste produced within processes throughout the cement plant.

Before or during construction, the cement product is physically integrated with other products (e.g. aggregates, chemical admixtures) into downstream products (e.g. concrete, mortar, plaster). During hydration, cement undergoes a chemical transformation. After hydration, the original cement product in the un-hydrated state is not identifiable anymore and cannot be physically separated. None of the constituents of cement contain biogenic carbon. Cement is therefore exempt from the obligation in EN 15804 + A2 to declare modules C and D. All processes related to construction stage, use stage, end-of-life of cement and module D are outside the scope of this EPD.

System diagram:

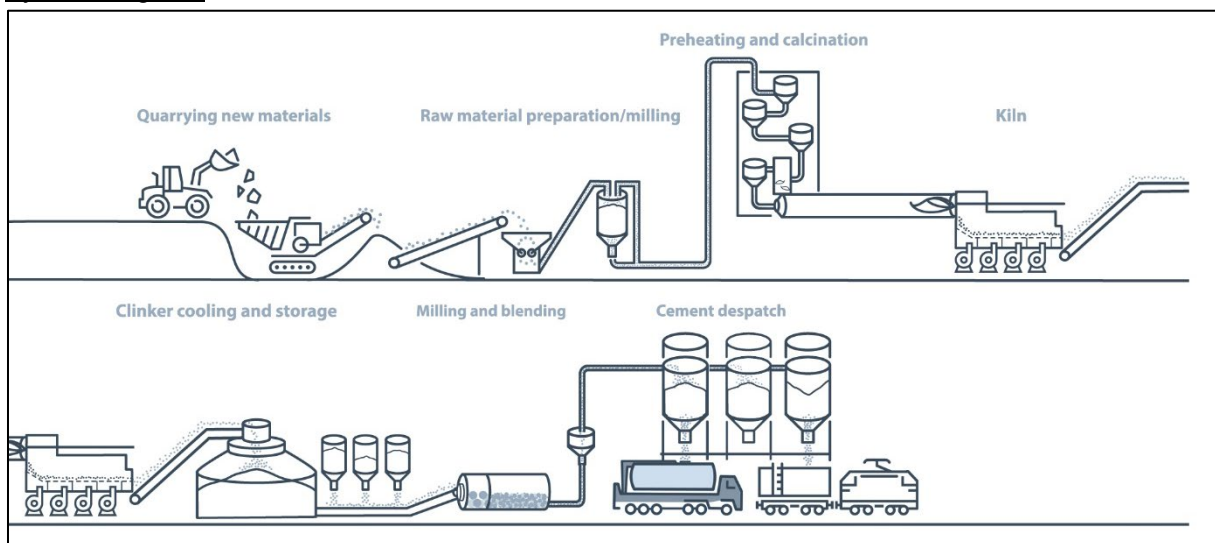

More information:

### Electricity mix

In 2020 nearly all UK cement production sites purchased their electricity on green tariffs, i.e. from low carbon sources. Details of the tariff and corresponding electricity mix were obtained for each site from MPA members. For the site still using a standard tariff, the UK grid mix for 2020 was obtained from the UK government official National Statistics.

A sector specific mix for electricity purchased from the grid was calculated for use in the GCCA EPD tool:

Coal and peat	0.19 %
Oil	0.15 %
Gas	3.80 %
Biomass	12.81 %
Waste	5.68 %
Nuclear	33.45 %
Hydro	3.32 %
Geothermal	0.00 %
Solar	6.87 %
Wind	33.74 %

In addition, one clinker and cement production site has on-site electricity generation from a solar farm.

#### Cut-offs

Further additives (stannous sulphate, stannous chloride, strength enhancer, air entrainer), used in very small quantities (<0.01 %) in UK cement manufacturing, have been cut-off in the EPD calculation.

#### Data quality

Data is provided by 100% of UK cement producers, who are all MPA members, and covers 100% of UK cement production. MPA members have their own data management quality systems in place. Each site is required to report CO<sub>2</sub> emissions under the EU Emissions Trading Scheme (replaced by the UK Emissions Trading Scheme in 2021) and all emissions to air under the UK Pollution Inventory Reporting Requirements. The reported emissions are independently verified by the respective Regulatory authorities.

MPA also collects this input data from its' members on an annual basis, reviews it and performs additional sector-wide analysis. MPA reports sector data on kiln fuel consumption, NCV (or LHV), CEF and CO<sub>2</sub> emissions, together with electricity consumption, to the UK government for inclusion in official statistics.

Therefore, confidence in the data quality is very high.

#### Manufacturing Process

##### **Quarrying raw materials**

The primary raw material used in the manufacture of cement is either limestone or chalk, which contain high proportions of calcium carbonate. A secondary raw material (usually clay) contains oxides of silica, alumina and iron. Materials are often quarried in locations close to the cement production line. Quarried material is crushed to pieces with diameter less than 90 mm and transported by conveyor belt to the raw material preparation and milling stage. Waste derived raw materials can often replace some of the quarried raw material needs.

##### **Raw material preparation/milling**

Each of the raw materials is transported separately to silos. Material from the silos is then selected in specific amounts to form the right 'recipe' for the raw mix. This material is ground together in a raw mill until evenly mixed. The raw mill grinds the raw mix to a powder whilst drying the material with exhaust gases from the preheater. The material is then transported to a blending silo where the raw mix is prepared for feeding the preheater.

##### **Preheating and calcination**

The raw mix is fed to a preheater tower where it is heated to around 900°C in a number of cyclone stages using heat exiting the kiln. On modern cement manufacturing sites, fuel is added at the bottom of the preheater in a calciner to better prepare the material for the kiln.

##### **Clinker formation in the kiln**

From the preheater/calciner, the material, now at a temperature of around 900°C, enters a large horizontal rotary kiln. A range of primary fossil, waste derived fuels and waste biomass fuels are fed

through a burner nozzle in the kiln to produce a flame which reaches temperatures of 2000°C. This heats the material to around 1450°C which produces marble sized dark grey nodules called clinker (the primary active ingredient of cement) that resemble volcanic rock.

**Clinker cooling and storage**

In the cooler, air is blown through a bed of clinker to cool the clinker from 1450°C to around 150°C. The heated air is recovered into the kiln to improve efficiency. The cooled clinker is then conveyed either to the clinker store or directly to the cement mill.

**Milling and blending**

Clinker is ground with gypsum and often mixed with other materials such as PFA, GGBS and limestone to produce cement, in either ball mills (as shown), or in a vertical spindle mill similar to that used to mill the raw mix. These mills grind the clinker and other materials into a fine well mixed powder. A number of different types of cement are made on site by varying the material proportions and their fineness which can alter the cement properties.

**Cement despatch**

Cement is stored in silos then despatched in bulk tankers by road or rail.

Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	MND	MND	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MND
Geography	UK	UK	UK	MND	MND	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MND
Specific data used	All foreground data					-	-	-	-	-	-	-	-	-	-	-	-
Variation – products						-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites						-	-	-	-	-	-	-	-	-	-	-	-

LCA variability is discussed in section 'Information related to Sector EPD'.

## Content information

Product components	Weight, kg	Post-consumer material, weight-%	Renewable material, weight-%
Clinker	907.75	-	-
Gypsum	50	-	-
Ground limestone	40	-	-
Ferrous sulphate	2.13	-	-
Grinding aids (additives)	0.12	-	-
TOTAL	1000	-	-
Packaging materials	Weight, kg	Weight-% (versus the product)	
None (delivered in bulk)	-	-	

## Environmental Information

### Potential environmental impact – mandatory indicators according to EN 15804

Results per functional or declared unit		
Indicator	A1-A3 (Total)	Unit
Global Warming Potential total	839.8	kg CO <sub>2</sub> eq.
Global Warming Potential fossil fuels <sup>1)</sup>	839.6	kg CO <sub>2</sub> eq.
Global Warming Potential biogenic <sup>2)</sup>	0.1987	kg CO <sub>2</sub> eq.
Global Warming Potential land use and land use change	4.749E-2	kg CO <sub>2</sub> eq.
Depletion potential of the stratospheric ozone layer	1.025E-5	kg CFC 11 eq.
Acidification potential, Accumulated Exceedance	2.063	mol H <sup>+</sup> eq.
Eutrophication potential, fraction of nutrients reaching freshwater end compartment	0.2191	kg PO <sub>4</sub> eq.
Eutrophication potential, fraction of nutrients reaching freshwater end compartment	7.145E-2	kg P eq.
Eutrophication potential, fraction of nutrients reaching marine end compartment	5.099E-3	kg N eq.
Eutrophication potential, Accumulated Exceedance	6.643	mol N eq.
Formation potential of tropospheric ozone	1.605	kg NMVOC eq.
Abiotic depletion potential for non- fossil resources*	1.616E-4	kg Sb eq.
Abiotic depletion for fossil resources potential*	2739	MJ, net calorific value
Water (user) deprivation potential, deprivation-weighted water consumption*	44.65	m <sup>3</sup> world eq. deprived

1) The indicated Global Warming Potential fossil fuels (GWP-fossil) value includes CO<sub>2</sub> emissions from combustion of both fossil and waste-derived fuels. The 'net' value of GWP-fossil, excluding combustion of waste-derived fuel is 753.6 kg CO<sub>2</sub> eq.

2) The indicated Global Warming Potential biogenic (GWP-bio) value includes CO<sub>2</sub> emissions from combustion of waste biomass. The 'net' value of GWP-bio, excluding combustion of biomass in waste-derived fuels, is 0.06 kg CO<sub>2</sub> eq.

\* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

### Potential environmental impact – additional mandatory and voluntary indicators

Not declared

GWP-GHG indicator is not relevant for cement product group and not included in the GCCA EPD tool.



## Use of resources

Results per functional or declared unit		
Indicator	A1-A3 (Total)	Unit
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	537.0	MJ, net calorific value
Use of renewable primary energy resources used as raw materials	0	MJ, net calorific value
Total use of renewable primary energy resources	537.0	MJ, net calorific value
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	2739	MJ, net calorific value
Use of non-renewable primary energy resources used as raw materials	0	MJ, net calorific value
Total use of non-renewable primary energy resources	2739	MJ, net calorific value
Use of secondary materials	58.30	kg
Use of renewable secondary fuels	427.4	MJ, net calorific value
Use of non-renewable secondary fuels	786.7	MJ, net calorific value
Net use of fresh water	1.052	m <sup>3</sup>

## Waste production and output flows

### Waste production

Indicators not declared

### Output flows

Results per functional or declared unit		
Indicator	A1-A3 (Total)	Unit
Components for re-use	0	kg
Materials for recycling	0	kg
Materials for energy recovery	0	kg
Exported energy	0	MJ per energy carrier

## Information on biogenic carbon content

Results per functional or declared unit		
BIOTIC CARBON CONTENT	QUANTITY	Unit
Biogenic carbon content in product	0	kg C
Biogenic carbon content in packaging	0	kg C

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>.

## Additional information

### UK Concrete and Cement Industry Roadmap to Beyond Net Zero

<https://thisisukconcrete.co.uk/Resources/UK-Concrete-and-Cement-Roadmap-to-Beyond-Net-Zero.aspx>

The UK concrete and cement industry has developed a roadmap to beyond net zero by 2050 – removing more carbon dioxide from the atmosphere than it emits each year.

The industry has a strong track record having taken considerable early action and delivered a 53% reduction in absolute carbon dioxide emissions since 1990 – decarbonising faster than the UK economy as a whole.

However, it is committed to building on this early action and has prepared a detailed and viable roadmap that sets out a clear pathway to reduce emissions to beyond net zero.

Importantly, the roadmap does not rely upon carbon offsetting or offshoring emissions but demonstrates an achievable route to beyond net zero through the application of seven decarbonisation technologies.

The 'Roadmap to Beyond Net Zero' calculates the potential of each technology and the carbon savings which can be achieved.

Five of these technologies focus on production related emissions:

- Indirect emissions from decarbonised electricity
- Decarbonised transport networks
- Low carbon cements and concretes
- Fuel switching
- Carbon capture, usage and storage (CCUS)

Going beyond net zero will be achieved by using on-site carbon capture and by maximising the natural, in-use properties of concrete which include:


- Carbonation – the natural process where concrete absorbs CO<sub>2</sub> from the atmosphere throughout its lifetime
- Thermal mass – a property of heavyweight materials like concrete and masonry where heat can be absorbed, stored and released, reducing the energy needed to heat and cool buildings

## Information related to Sector EPD

The declared cement is a sector representative UK CEM I modelled using aggregated data from all MPA member sites which manufacture clinker and cement, or grind and blend cement, or blend cement. It covers 100% of CEM I produced in the UK. UK produced cement accounts for around 80% of the UK cement market. (The remaining 20% is accounted for by imports by both MPA members and non-members).

### Variability of LCA Indicators

The following diagram shows the influencing factors for selected LCA indicators:

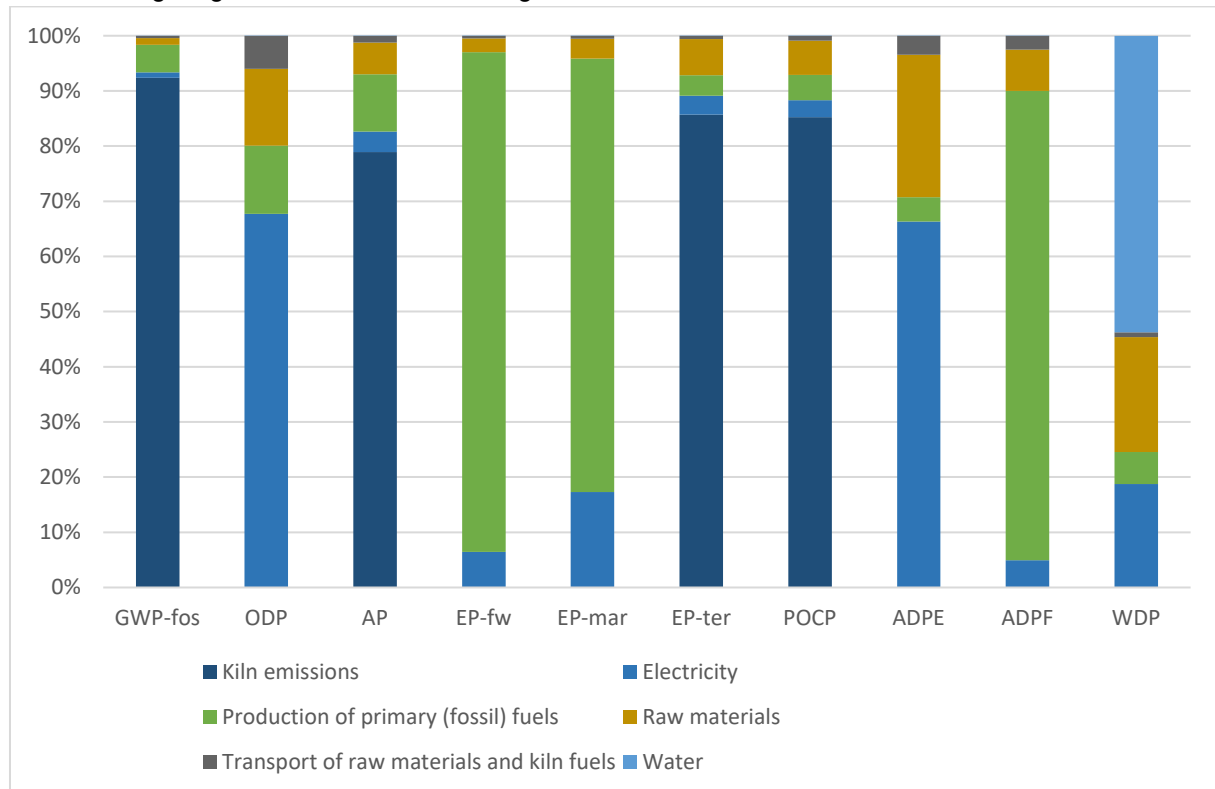

The LCA of CEM I cement in the UK is mainly influenced by the following factors, which vary from cement plant to cement plant:

- content of cement clinker in the CEM I cement
- fuel mix and share of fossil fuels/alternative waste-derived fuels in clinker production (*the thermal input from coal ranges from 32% to 69% of the total thermal input in UK cement clinker production, depending on the site*)
- electricity mix in the respective cement plant
- technology/kiln type (*in the UK, there are 6 sites with pre-calciner kilns, 3 with pre-heater kilns and 2 with Lepol Grate kilns*)

The range of clinker content in CEM I is limited by the standard BS EN 197-1:2011.

Note that, in the UK, secondary cementitious materials (SCMs), such as Fly Ash or GGBS, are typically added after the cement has left the factory, at the concrete mixing plant.

The variation, due to the kiln fuel mix, of GWP-fossil is  $< \pm 10\%$ .

N.B. The GWP-fossil values reported in this EPD are based on 'gross' CO<sub>2</sub> emissions, including combustion of both fossil and waste-derived fuels (also called 'alternative' or 'secondary' fuels). Some cement EPDs exclude the combustion of waste-derived fuels, and report GWP values based on 'net'

CO<sub>2</sub> emissions. When comparing EPDs, it is important to note that 'net' GWP values, which exclude CO<sub>2</sub> emissions from the combustion of waste-derived fuels, will be lower than 'gross' GWP values which include them.

The LCA indicators for CEM I in this sector EPD are intended to provide the basis for the environmental assessment of buildings and other construction works in typical UK situations. This declared CEM I cement is a representative average which is not available for purchase on the market. For very detailed calculations requiring LCA data for specific cements, please refer to EPDs from the individual MPA member cement manufacturer.

N.B. Any LCA assessment of buildings and construction works in typical UK situations, should include SCMs added after the cement has left the factory gate, at the concrete mixing plant.

## Differences versus previous versions

This is the first UK average CEM I EPD published by MPA.

## References

General Programme Instructions of the International EPD<sup>®</sup> System. Version 3.01.

EN 15804:2012 + A2:2019, Sustainability of construction works - Environmental product declarations - core rules for the product category of construction products

BS EN 197-1:2011, Cement Part 1: Composition, specifications, and conformity criteria for common cements

Quantis, "GCCA Industry EPD Tool for Cement and concrete - LCA model, International Version" (Tool version 3.1), November 2021



[www.mineralproducts.org](http://www.mineralproducts.org)



[www.environdec.com](http://www.environdec.com)