



MACCAFERRI

Environmental Product Declaration (EPD)

PARADRAIN



PCR: 2012:01 Construction products and construction services version 2.2
Geographical scope: Global
EPD registration number: S-P-01464
Date of publication (issue): 2019-01-18
Date of revision: 2021-06-22
Date of validity: 2023-12-17 (5 years)

1.	The company	3	4.	Reference	15
2.	The Products	4	5.	Glossary	16
	2.1 The production process	6			
	2.2. Product composition	7			
3.	Environmental product declaration	8	6.	Additional information	17
	3.1 Methodology	8			
	3.2 Declared unit	9			
	3.3 System boundary	9			
	3.4 Main assumptions	11			
	3.5 Parameters describing the environmental impacts	11	7.	Verification and registration	18
	3.6 Indicators of resources use	13			
	3.7 Indicators of waste output flows	14			

PROGRAMME RELATED INFORMATION

This EPD is developed under The International EPD® System Programme Operator, in compliance with the General Program Instruction version 2.5. for the EPD development and the Product Category Rules PCR CPC 54 "Construction products and Construction services" 2012:01 version 2.2. More information about the International EPD® System is available on the website <https://www.environdec.com/>

1. THE COMPANY

MACCAFERRI

Founded in 1879, Officine Maccaferri is specialised in the development of engineering solutions for the civil and environmental construction industry.

Its continued growth is based upon long-held values of innovation, integrity, excellent service and respect for the environment.

Our vision is to become a leading international provider of advanced solutions to the civil, geotechnical and environmental construction markets. We deliver solutions from retaining walls to hydraulic works and from rockfall mitigation systems to soil reinforcement.

By implementing a strategy of vertical integration, we research, manufacture materials, design, supply and build solutions within these fields. Our differentiating factor is our people and their knowledge capital, which we share with our clients to overcome their engineering challenges.

The manufacturing of ParaDrain is managed by Linear Composites Ltd a subsidiary of the Officine Maccaferri Group.



2. THE PRODUCT

MACCAFERRI

ParaDrain® geogrids are planar structures consisting of a biaxial array of composite geosynthetic strips. The strips comprise of a core of high tenacity polyester tendons encased in a polyethylene sheath.

The longitudinal strips have a channel profile, which has a geotextile filter strip laminated to it. This forms an open channel for the drainage of water contained within soils.

ParaDrain® is CE certified for reinforcement applications.

ParaDrain® is a unique and new generation of geogrid, combining reinforcement and drainage functions in one product. ParaDrain® can be used in embankment and slope reinforcement where the combined reinforcement and drainage functions can operate effectively in marginal fills.



2. THE PRODUCTS

MACCAFERRI

VIEW OF PARADRAIN



ParaDrain used for soil reinforcement



Product close up

2.1 THE PRODUCTION PROCESS

The production process (Figure 3) includes the extrusion of the polyethylene to coat a core made in high tenacity polyester in order to obtain composite geosynthetic strips, which are assembled, through a thermo-bonding process, to form a geogrid.

Before the assembly, in the longitudinal strips, a geotextile is inserted through a process of bending and welding.

Technical Characteristics of the PARADRAIN range products are listed and detailed in the technical data sheet available on Maccaferri website (<https://www.maccaferri.com/>).

According to Construction Product Regulation CEE 305/2011 the essential technical characteristics, as per Harmonized Documents: EN 13249, EN 13250, EN 13251, EN 13253, EN 13254, EN 13255, EN 13257 and EN 13265, are reported in the Declaration of Performances (DOP).

This EPD describes the impacts of ParaDrain produced in UK (Linear Composites Ltd), using as reference products the most sold ParaDrain variant in the plant for the reference year. The results reported in this EPD, through the selected reference product, is representative of the product family production in UK.

The reference CPC code of the products covered by the present EPD is 369 "Other plastic products".

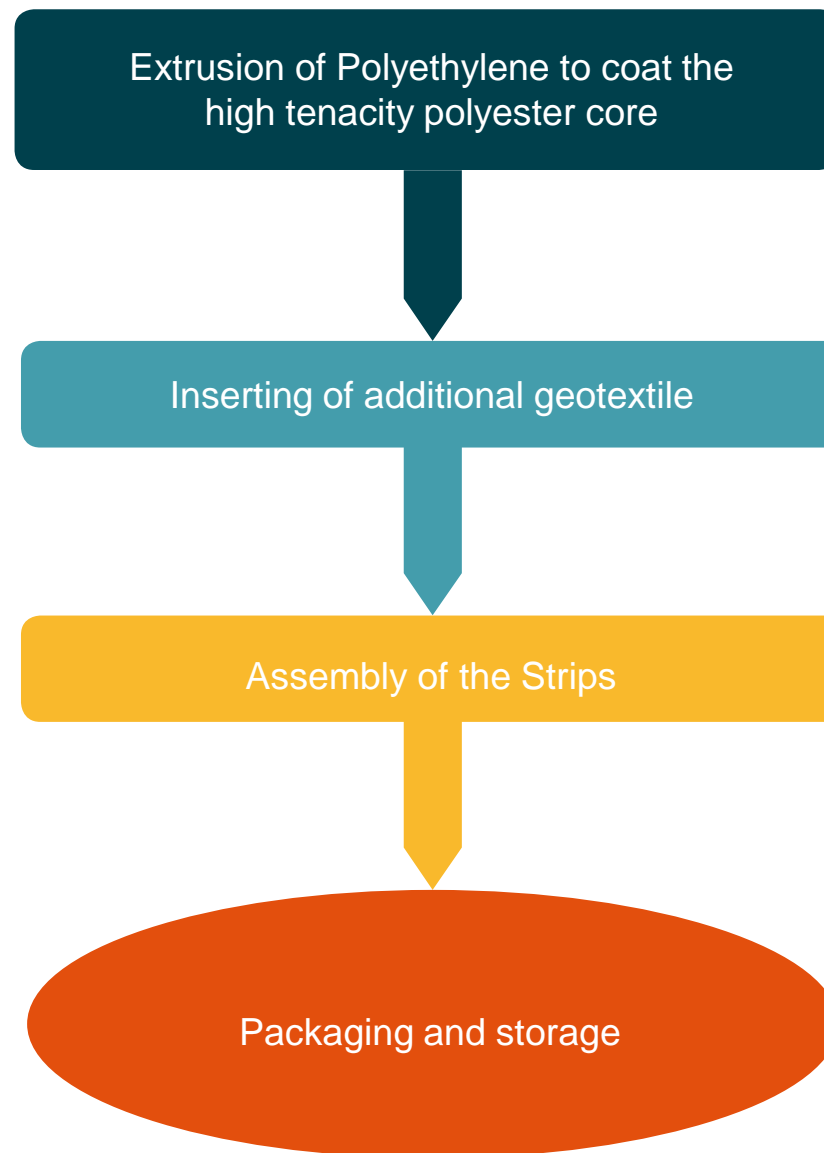


Figure 4: Production process of ParaDrain

2. THE PRODUCTS

MACCAFERRI

2.2 PRODUCT COMPOSITION

The composition of the reference product is reported in its weight.

Table 1, whereas its main dimensional features are shown in Table 2.

The content of SVHC in the ParaDrain does not exceed 0.1 % of its weight.

PRODUCT COMPOSITION OF PARADRAIN (REFERENCE PRODUCT)	
Paradrain 100/15	
BoM – kg contribution of materials/components per 1 m ² of product	
Polyester fibres	0.229
Low-density polyethylene	0.270
High-density polyethylene	0.228
Polypropylene	0.007
Primary Packaging	
Cardboard tube	0.061
PE film	0.006
PP bugs	0.001
Total weight (kg)	0.534


Table 1: BoM of the reference product (ParaDrain 100/15))

DIMENSIONAL FEATURES OF PARADRAIN 100/15	
Strip width (longitudinal)	24 mm
Mesh size (open area)	200 mm × 500 mm

Table 2: Dimensional features of the reference products

3.1 METHODOLOGY

The study behind the present EPD has been performed according to the state of art of the LCA methodology, with specific reference to the construction sector, in accordance to the following standard and guide lines:

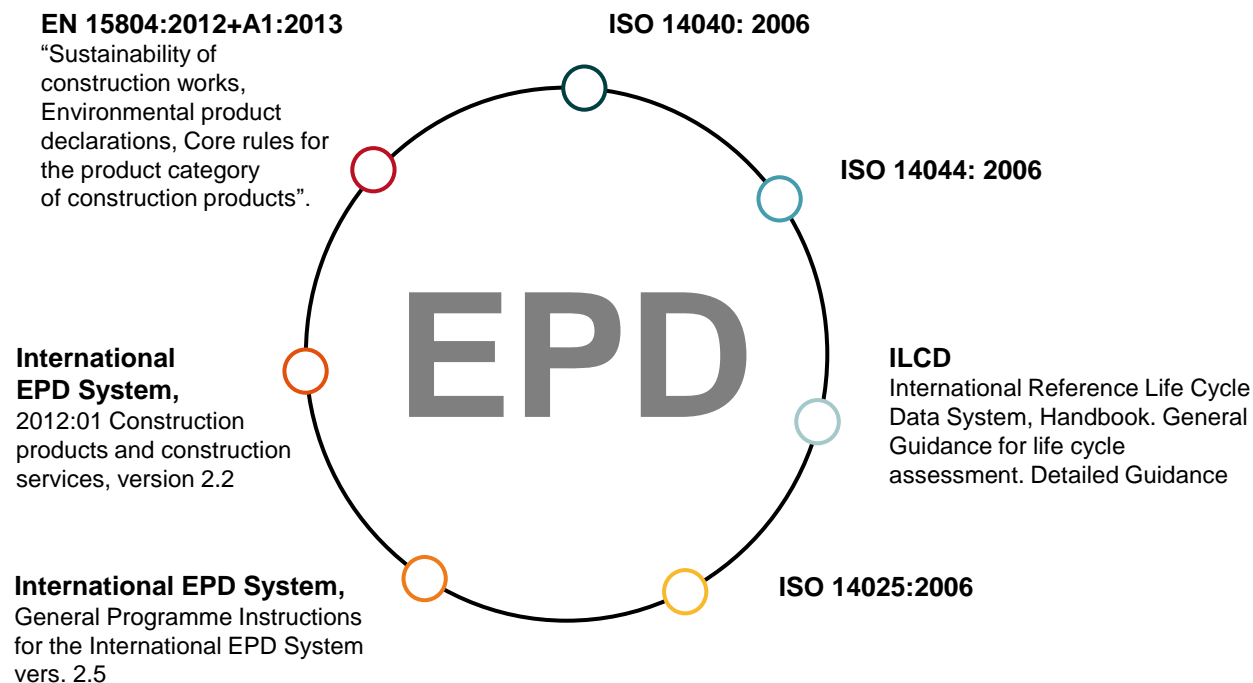

The goal of the study is the evaluation of the potential environmental impacts of ParaDrain.

The EPD is mainly addressed to the business-to-business communication. The data elaboration has been performed with the Gabi software, version 8.0.6.0.20. The database used are the most updated ones implemented in Gabi software. More in detail, main database used is thinkstep. The LCIA method used is CML 2001 version 4.2 (April 2013).

3. ENVIRONMENTAL PRODUCT DECLARATION






MACCAFERRI

3.2 DECLARED UNIT

The declared unit is 1 m² of product, plus its packaging.

3.3 SYSTEM BOUNDARY

The EPD only covers the Cradle to Gate stage (as represented in Table 3 and showed in Figure 4) because other stages are very dependent on particular scenarios and are better developed for specific construction works.

 PRODUCT STAGE	A1	Raw Material Supply	X
	A2	Transport	X
	A3	Manufacturing	X
 CONSTRUCTION PROCESS STAGE	A4 to A5	Transport from the gate to the installation site, Construction/ Installation	Mnd*
 USE STAGE	B1 to B7	Use, Maintenance, Repair, Replacement, Refurbishment, Operational energy use, Operational water use	Mnd*
 END-OF-LIFE STAGE	C1 to C4	Deconstruction/Demolition, Transport, Waste processing, Disposal	Mnd*
 BENEFITS and LOADS BEYOND SYSTEM BOUNDARY	D	Reuse, Recycling potential	Mnd*

* Module Not Declared

Table 3: Life cycle stages included in the study for Officine Maccaferri ParaDrain

3. ENVIRONMENTAL PRODUCT DECLARATION

The following stages are included in the study:

Raw Materials supply (A1). Production of raw materials used in the products, of as well as the production of energy carriers used in the production process.

Transport of raw materials to the factory (A2)

Manufacturing of the Officine Maccaferri (Linear Composites) ParaDrain (A3).

It includes the following production phases:

- Extrusion for the polyethylene to coat the high tenacity polyester core
- Inserting of the geotextile
- Assembly of the strips to form a geogrid
- Final check on finished product and packaging storage.

Moreover, in module A3, the production of primary packaging and of the ancillary materials and the treatment of waste generated from the manufacturing processes are accounted for.

The electricity used in the manufacturing processes comes from the national grid

The reference year of the study is 2017.

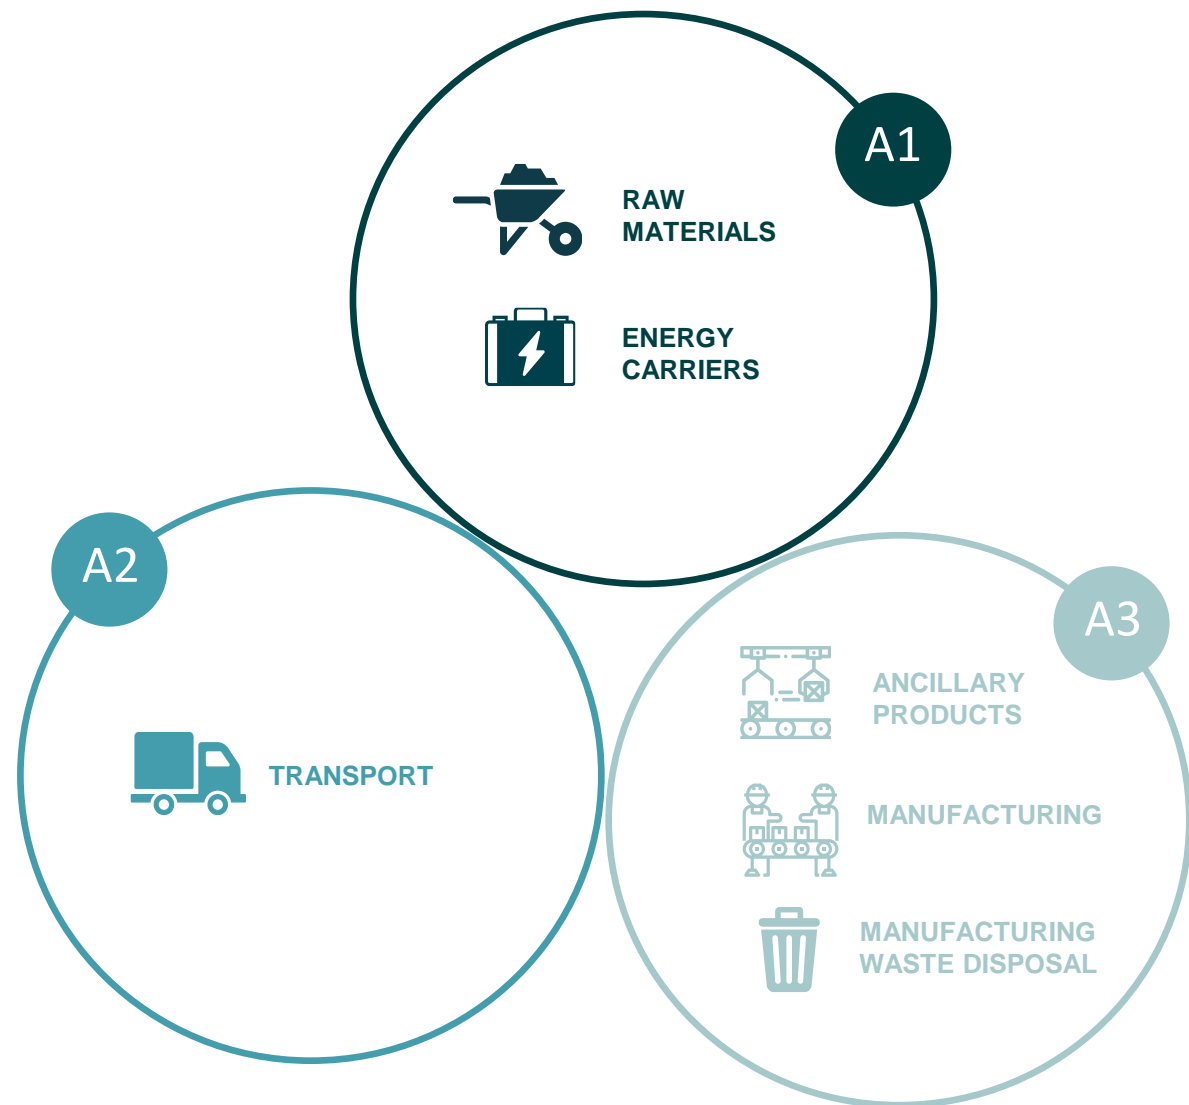


Figure 5: System boundaries for the Officine Maccaferri ParaDrain (Linear Composites)

3. ENVIRONMENTAL PRODUCT DECLARATION

MACCAFERRI

3.4 MAIN ASSUMPTIONS, CUT OFFS AND BACKGROUND DATA INFORMATION

Regarding the exclusion of product life cycle stages and processes, the capital goods have not been accounted for, as well as the use and the end of life phases.

The main assumptions applied in the study are reported below.

- For the majority of the raw materials as well as for the packaging for the finished products an European production is assumed.
- A default mean a transportation (truck Euro 4 > 32 t) with an utilisation ratio of 0.61 has been assumed when primary data on transport size were not available.
- For the energy consumption and the ancillary consumption in the manufacturing process, an allocation based on the mass of finished products from the plants has been applied.

Background data used in the study are from LCI database and are not older than 5 years.

3.5 PARAMETERS DESCRIBING THE ENVIRONMENTAL IMPACTS

IMPACT CATEGORY	Paradrain 100/15
Abiotic Depletion (ADP fossil) [MJ]	4.67E+01
Abiotic Depletion (ADP elements) [kg Sb-Equiv.]	3.13E-07
Acidification Potential (AP) [kg SO ₂ -Equiv.]	3.47E-03
Eutrophication Potential (EP_ [kg Phosphate-Equiv.]	4.26E-04
Global Warming Potential (GWP 100 years) [kg CO ₂ -Equiv.]	1.75E+00
Ozone Layer Depletion Potential (ODP, steady state) [kg R11-Equiv.]	1.59E-11
Photochem. Ozone Creation Potential (POCP) [kg Ethene-Equiv.]	4.69E-04

Table 4: Environmental profile for the representative variant of Paradrain manufactured by Officine Maccaferri (Linear Composite)

3. ENVIRONMENTAL PRODUCT DECLARATION

The validity of impact per variant is driven by the raw materials contribution, thus the potential environmental impacts proportionally increase with the weight of raw material per square meter. For this reason, in table 5 the environmental profile of the heaviest variant within the ParaDrain family is reported.

IMPACT CATEGORY	Paradrain 200/15
Abiotic Depletion (ADP fossil) [MJ]	7.35E+01
Abiotic Depletion (ADP elements) [kg Sb-Equiv.]	5.01E-07
Acidification Potential (AP) [kg SO2-Equiv.]	5.42E-03
Eutrophication Potential (EP_ [kg Phosphate-Equiv.]	6.71E-04
Global Warming Potential (GWP 100 years) [kg CO2-Equiv.]	2.82E+00
Ozone Layer Depletion Potential (ODP, steady state) [kg R11-Equiv.]	2.66E-11
Photochem. Ozone Creation Potential (POCP) [kg Ethene-Equiv.]	7.44E-04

Table 5: Environmental profile for the heaviest variant of Paradrain manufactured by Officine Maccaferri (Linear Composite)

3. ENVIRONMENTAL PRODUCT DECLARATION

MACCAFERRI

3.6 INDICATORS OF RESOURCES USE

INDICATOR OF RESOURCES	Paradrain 100/15
Use of renewable primary energy excluding renewable primary resources used as raw materials [MJ, net calorific value]	4.39E+00
Use of renewable primary energy resources used as raw materials [MJ, net calorific value]	0,00E+00
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) [MJ, net calorific value]	4.39E+00
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials [MJ, net calorific value]	5.02E+01
Use of non-renewable primary energy resources used as raw materials [MJ, net calorific value]	2,07E+00
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) [MJ, net calorific value]	7.09E+01
Use of secondary material [kg]	0.00E+00
Use of non-renewable secondary fuels [MJ, net calorific value]	4.75E-10
Use of renewable secondary fuels [MJ, net calorific value]	4.05E-11
Use of net fresh water [m^3]	1.85E-02

Table 6: Indicators of resources use for Officine Maccaferri (Linear Composite) Paradrain

3. ENVIRONMENTAL PRODUCT DECLARATION

3.7 INDICATORS OF WASTE AND OUTPUT FLOWS

INDICATOR OF WASTE	Paradrain
	Paradrain 100/15
Hazardous waste disposed [kg]	4,63E-08
Non-hazardous waste disposed [kg]	2,87E-02
Radioactive waste disposed [kg]	1,39E-03

Table 7: Indicators of waste for Officine Maccaferri Gabions

OUTPUT FLOWS	PARADRAIN
	Paradrain 100/15
Components for reuse [kg]	0.00E+00
Material for recycling [kg]	1.23E-02
Materials for energy recovery [kg]	7.32E-04
Exported energy, electricity [MJ]	0.00E+00
Exported energy, thermal [MJ]	0.00E+00

Table 8: Indicators of waste for Officine Maccaferri (Linear Composites) ParaGrid

EC-JRC, 2010. International reference Life Cycle data System Handbook. General Guidance for life cycle assessment. Detailed Guidance

Ecoinnovazione. 2018. Technical report: LCA study of ParaProducts for Civil Engineering works. version 3

EN 15804:2012+A1:2013 "Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products"

International EPD® System, 2017. General Programme Instructions for the International EPD System, vers. 2.5

International EPD® System, 2012. PCR 2012:01 Construction products and construction services, version 2.2

International Organisation for Standardization (ISO), 2006a Environmental management – Life Cycle assessment – Principles and framework. ISO 14040:2006, Geneva

International Organisation for Standardization (ISO), 2006b Environmental management – Life Cycle assessment – Requirements and guidelines. ISO 14044:2006, Geneva

International Organisation for Standardization (ISO), 2006c Environmental labels and declarations -- Type III environmental declarations -- Principles and procedures. ISO 14025:2006, Geneva

ENVIRONMENTAL IMPACT: Any change to the environment, whether adverse or beneficial, wholly or partially resulting from an organization's environmental aspects [ISO 14001:2004].

ENVIRONMENTAL DECLARATION: Claim which indicates the environmental aspects of a product or service. An environmental label or declaration may take the form of a statement, symbol or graphic on a product or package label, in product literature, in technical bulletins, in advertising or in publicity, amongst other things. [ISO 14020:2000].

HAZARDOUS WASTE: Hazardous waste is waste that poses substantial or potential threats to public health or the environment [EPD, General Programme Instructions 2.5].

IMPACT CATEGORY: Class representing environmental issues of concern to which life cycle inventory analysis results may be assigned [ISO 14040:2006]

LIFE CYCLE ASSESSMENT (LCA): Compilation and evaluation of the inputs, outputs and the potential environmental impacts of a product system throughout its life cycle [ISO 14040:2006]

PRODUCT CATEGORY RULES (PCR): Set of specific rules, requirements and guidelines for developing Type III environmental declarations for one or more product categories [ISO 14025:2006].

RAW MATERIAL: Primary or secondary material that is used to produce a product. Secondary material includes recycled material. [ISO 14040:2006]

RECOVERED (RECLAIMED) MATERIAL: Material that would have otherwise been disposed of as waste or used for energy recovery, but has instead been collected and recovered as a material input, in lieu of new primary material, for a recycling or a manufacturing process. [ISO 14021:1999].

SYSTEM BOUNDARY: Set of criteria specifying which unit processes are part of a product system [ISO 14040:2006].

SVHC: Substances that may have serious and often irreversible effects on human health and the environment can be identified as substances of very high concern (SVHCs). If a substance is identified as an SVHC, it will be added to the Candidate List for eventual inclusion in the Authorization List of the REACH Regulation). The inclusion in this list implicates legal duties for manufacturers, importers o companies, which use those substances as such, in formulation or in their products.

6.1 ADDITIONAL INFORMATION CONCERNING THE PROGRAMME AND THE EPD

EPDs within the same product category but from different programme may not be comparable.

EPDs of construction products may not be comparable if they do not comply with EN 15804. Environmental product declarations within the same product category from different programs may not be comparable. This EPD and the PCR CPC 54 "Construction products and Construction services" are available on the website of The International EPD® System (www.environdec.com).

The verifier and the Programme Operator do not make any claim nor have any responsibility of the legality of the products included in the present EPD.

The LCA study and the present EPD have been issued with the technical scientific support of Ecoinnovazione S.r.l., spin-off ENEA (<http://ecoinnovazione.it/?lang=en>).

6.2 ADDITIONAL INFORMATION ON THE PRODUCTS AND ON THE COMPANY

Our factory in United Kingdom is certified according to ISO 9001.

For further information on product characteristics, typical applications, technical datasheets and case histories, please visit our website (maccaferri.com) or contact us info@maccaferri.com.


6.3 DIFFERENCES VS PREVIOUS VERSION

Editorial changes occurred respect the previous version in order to delete the reference to Maccaferri Industrial Group in paragraph 1.

7. VERIFICATION AND REGISTRATION

MACCAFERRI

CEN STANDARD EN 15804 SERVED AS CORE PCR TERRAMESH – MODULES A1-A3

EPD Programme:	The International EPD® System. For more information - www.environdec.com
PCR:	PCR 2012:01 Construction products and construction services version 2.2
PCR review was conducted by:	The Technical Committee of the International EPD® System. Contact via info@environdec.com
EPD Registration no:	S-P-01464
EPD validity:	2023-12-17 (5 years)
EPD valid within the following geographical area:	International
Technical support:	Ecoinnovazione S.r.l. – spin-off ENEA - Via d'Azeglio 51, 40123 Bologna  ecoinnovazione spin off ENEA www.ecoinnovazione.it
Independent verification of the declaration and data according to ISO 14025:	EPD verification (external)
Third party verifier:	SGS SGS Italia S.p.A. Via Caldera 21, 20153 Milano. www.it.sgs.com
Accredited or approved by:	Accredia, certificate n.006H