



ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and
EN 15804:2012+A2:2019 for:

SGG PLANILUX®

6 mm

Version 2

Date of publication: 26-05-2023

Revision date: 21-09-2023

Validity: 5 years

Valid until: 25-05-2028

Scope of the EPD®: India



THE INTERNATIONAL EPD® SYSTEM



THE INTERNATIONAL EPD SYSTEM

Registration number

The International EPD® System:

S-P-09213



Manufacturer:

Saint-Gobain India Pvt. Ltd

General information

Company information

Manufacturer: SAINT-GOBAIN INDIA PRIVATE LIMITED – GLASS BUSINESS, Sigapi Aachi Building, Floor No. 7, 18/3, Rukmini Lakshmi pathy Road, 600008 Chennai, India

Production plant: Three production sites based in INDIA: Chennai, Bhiwadi, Jhagadia

Management system: Venugopal, R (venugopal.r@saint-gobain.com)

Programme used: The International EPD® System. More information at www.environdec.com
EPD registration/declaration number: S-P-09213

PCR identification: PCR 2019:14 Construction products (EN 15804:2012: A2) version 1.2.5 and its c-PCR-009 Flat glass products used in buildings and other construction works (EN17074:2019)

Complementary PCR (c-PCR-005): 2019-12-20. Thermal insulation products (EN 16783:2017)

UN CPC CODE: 371

Owner of the declaration: SAINT-GOBAIN India Private Limited

Product name and manufacturer represented: SGG PLANILUX® produced by SAINT-GOBAIN India Private Limited – Glass Business

EPD® prepared by: Sreekavya Vadapalli (Saint Gobain Research India, Sreekavya.Vadapalli@saint-gobain.com), Tavishi Misra (Saint Gobain Research India, Tavishi.Misra@saint-gobain.com), Marie-Charlotte Harquet (Saint-Gobain LCA central team, marie-charlotte.harquet@saint-gobain.com)

Geographical scope of the EPD®: India

EPD® registration number: S-P-09213

Declaration issued: 26_05_2023, valid until: 25_05_2028

A description of the differences versus previously published versions

Revised date: 21_09_2023, valid until: 20_09_2028 (the reason of change is due to the change of name from “ Extra Clear glass” to “ Clear glass”)

Demonstration of verification: an independent verification of the declaration was made, according to ISO 14025:2010. This verification was external and conducted by the following third party based on the PCR mentioned above.

Programme information

PROGRAMME: The International EPD® System - India Regional Hub

ADDRESS: EPD International AB - Box 210 60 - SE-100 31 Stockholm - Sweden

WEBSITE: www.environdec.com

E-MAIL: info@environdec.com

CEN standard EN 15804:2012 + A2:2019 serves as the Core Product Category Rules (PCR)

Product category rules (PCR): PCR 2019:14 Construction Products, version 1.2.5

PCR review was conducted by: The Technical Committee of the International EPD® System

President: Claudia A. Peña. Contact via info@environdec.com

Independent third-party verification of the declaration and data, according to ISO 14025:2006:

EPD process certification EPD verification

Third party verifier: SUNIL KUMAR

SIPL PVT Ltd. - sunil@sipl-sustainability.com

Approved by: The International EPD® System

Procedure for follow-up of data during EPD validity involves third part verifier: Yes No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

Product description

Product description and description of use

This Environmental Product Declaration (EPD®) describes the environmental impacts of 1 m² of Clear Glass PLANILUX® to 6 mm with a light transmittance of maximum 89%, for an expected average service life of 30 years.

PLANILUX® can be incorporated into a building, furniture or industrial application. The impacts of installation are not taken into account.

PLANILUX® is a basic soda-lime silicate glass produced using the float procedure to be used in building, furniture & industrial applications. This glass is in conformity with the European Standard EN 572-2.

The low iron content of PLANILUX® limits the level of absorption - thereby increasing the level of solar gain (g value). PLANILUX® also contributes to a higher level of Light Transmission (LT). This helps to increase the level of natural daylight and reduces the need for artificial lighting – creating a more comfortable environment.

The low iron content of PLANILUX® also reduces the level of green coloring so that the appearance is clearer and more neutral. This is particularly noticeable when viewing the edge of the glass.

Technical data/physical characteristics :

Thickness (mm)	6
Visible parameters	
Light transmittance (LT) %	89
External light reflection (RLE) (%)	8
Energetic parameters	
Energy transmittance (ET) %	83
Energy absorbance (EA) %	9
Solar factor g	0.85

Table 1: Performance Data of PLANILUX® 6 mm

The performance data are given according to the EN 410-2011 standard.

Declaration of the main product components and/or materials

The product is 100% glass CAS number 65997-17-3, EINECS number 266-046-0.

Description of the main components and/or materials for 1 m² of glass PLANILUX® to 6 mm with a light transmittance of maximum 89%.

PARAMETER	VALUE
Quantity of glass for 1 m ² of product	15 kg
Thickness	6 mm
Packaging for the transportation and distribution	wood pallets, aluminium foil, corrugated board, expanded polystyrene (thermocol and polystyrene) and polyethylene
Product used for the Installation	Float Glass

There is no “Substance of Very High Concern” (SVHC) in concentration above 0.1% by weight, and neither do their packaging, following the European REACH regulation (Registration, Evaluation, Authorization and Restriction of Chemicals).

Packaging and product used: None

Description of the main product components and/or materials:

All the raw materials contributing to more than 5% to any environmental impact are listed in the following table :

Product components	Weight (%)	Post-consumer material weight (%)	Biogenic material weight and kg C/kg(%)
Silica sand	50 – 60 %		
Sodium carbonate	15 – 20 %		
Dolomite	10 – 15 %		
Lime Stone	0 – 5 %		
Cullet	10 – 15 %	1-5%	
Others	<1%		
Sum	100	1-5%	
Packaging materials	Weight (%)	Weight (%)	Weight biogenic carbon kg C/kg
Aluminium foil	50– 60%	NA	NA
Polyethylene	20– 40%		
Others	<1%	NA	NA

LCA calculation information

FUNCTIONAL UNIT	1 m ² of Clear Glass PLANILUX® for 6 mm with a light transmittance of maximum 89% for an expected average service life of 30 years.
SYSTEM BOUNDARIES	Cradle to grave and module D Mandatory Stages = A1-A3 ; B1-B7 ; C1-C4 and D
REFERENCE SERVICE LIFE (RSL)	According to PCR EN 17074:2019, the reference service life is 30 years
CUT-OFF RULES	All significant parameters shall be included. According to EN 15804, mass flows under 1% of the total mass input; and/or energy flows representing less than 1% of the total primary energy usage of the associated unit process may be omitted. However, the total amount of energy and mass omitted must not exceed 5% per module. The energy used for the installation of 1m ² of glass and the transport glass racks are included in the cut-off-rules.
ALLOCATIONS	Allocations are done on mass basis (kg)
GEOGRAPHICAL COVERAGE AND TIME PERIOD	The information was established over the year Aug 2021 – Aug 2022. The information collected comes from the three production plants – Chennai, Bhiwadi, Jhagadia sites producing Planilux 6 mm.
BACKGROUND DATA SOURCE	GaBi data were used to evaluate the environmental impacts. The data are representative of the years 2015-2019.
SOFTWARE	Gabi 9.2 - GaBi envision


According to EN 15804+A2, EPD of construction products may not be comparable if they do not comply with this standard. According to ISO 21930, EPD might not be comparable if they are from different programmes

LCA scope

System boundaries (X=included. MND=module not declared)

	PRODUCT STAGE			CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY
	Raw material supply	Transport	Manufacturing	Transport	Construction-Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-recovery
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	India																
Specific data used	<90%																
Variation products	Not Relevant																
Variation sites	-1% to 8%																

Life cycle stages

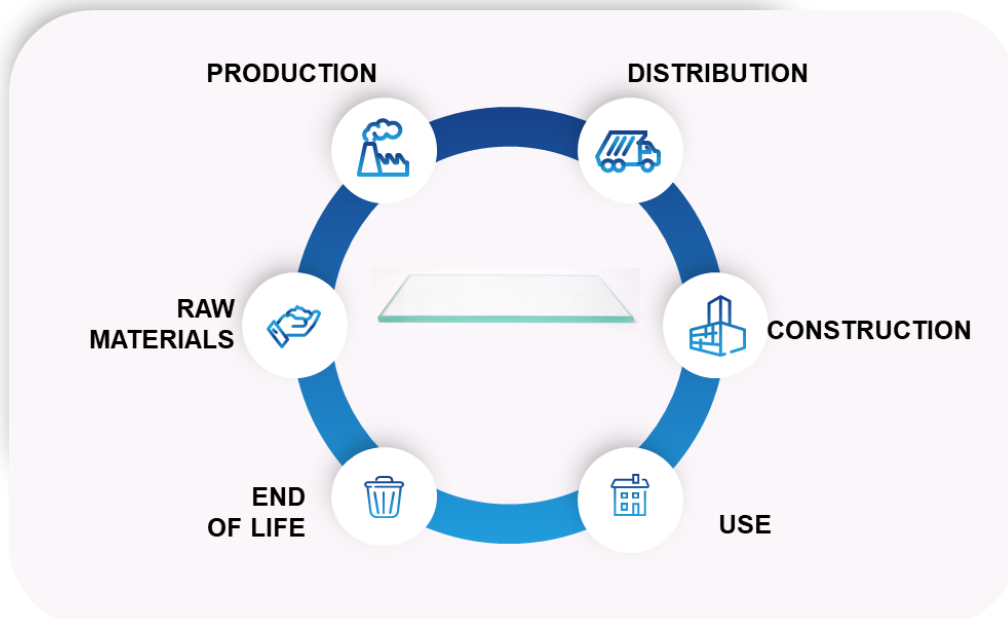

A1-A3, Product stage

Description of the stage:

For flat glass A1 to A3 represents the production of glass in the float from cradle to gate.

Description of the stage: the product stage of flat glass is subdivided into 3 modules A1, A2 and A3 respectively “Raw material supply”, “transport to manufacturer” and “manufacturing”.

Description of the scenarios and other additional technical information:

A1, Raw materials supply

This includes the extraction and processing of all raw materials and energy which occur upstream from the manufacturing process.

A2, Transport to the manufacturer

The raw materials are transported to the manufacturing site. The modelling includes road, boat and/or train transportations of each raw material.


A3, Manufacturing

This module includes the manufacture of products and the manufacture of packaging. The production of packaging material is taken into account at this stage. The processing of any waste arising from this stage is also included.

The product stage includes the extraction and processing of raw materials and energies, transport to the manufacturer, manufacturing and processing of flat glass.

Manufacturing process flow diagram

System diagram:

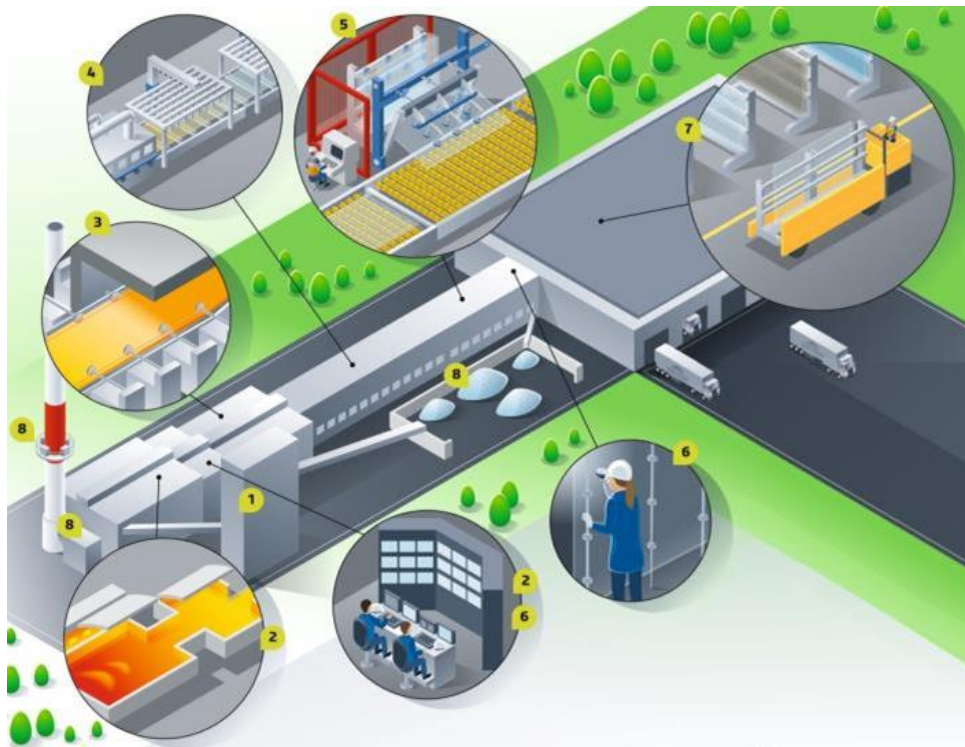

1. **BATCH MIXER:** Mix of raw materials (silica, soda ash, lime, feldspar and dolomite) to which is added recycled glass (cullet) and other compounds depending on the desired color and properties.
2. **FUSION FURNACE:** Raw materials are melted at 1,550°C in a furnace.
3. **FLOAT:** The molten glass is fed into a bath of molten tin. The glass floats on this flat surface and is drawn off in a ribbon. Serrated wheels, or top rolls, pull and push the glass sideways depending on the desired thickness.
4. **ANNEALING LEHR:** The glass is lifted onto conveyor rollers and passes through a controlled cooling tunnel measuring more than 100 meters in length. Approximately 600°C at the start of this step, the glass exits the lehr at room temperature.
5. **CUTTING AND STACKING:** The glass is automatically cut lengthwise and crosswise. The sheets of glass are raised by vacuum frames that then place them on glass stillages.
6. **QUALITY:** Automatic inspections and regular samples are taken to check the quality of the glass at each step in the glassmaking process.
7. **STORAGE AND TRANSPORTATION:** The stillages are placed on storage racks in the warehouse.
8. **ENVIRONMENT:** Use of recycled cullet, installation of pollution abatement systems and closed-circuit management of water: every measure is taken to limit the consumption of energy, extraction of natural resources, production of waste and emissions into the atmosphere.

The flat glass is transported on dedicated racks, used many times. This racks are not included in the life cycle of the product.

A4-A5, Construction process stage

Description of the stage: The construction process is divided into 2 modules: A4, transport to the building site and A5, installation in the building.

A4, Transport to the building site:

This module includes transport from the production gate to the building site. Transport is calculated on the basis of a scenario with the parameters described in the following table

PARAMETER	VALUE
Fuel type and consumption of vehicle or vehicle type used for transport e.g. long distance truck, boat, etc.	Vehicle type camion - "GLO: Truck-trailer ts": EURO 4, 34-40 t gross weight / 27 t payload capacity, 85% average utilization by mass; Reference year of data set: 2015. Data Thinkstep Professional Database
Distance	750 km
Capacity utilisation (including empty returns)	GaBi default values: 85% of mass capacity 30% empty trips
Bulk density of transported products*	2500 kg/m ³
Volume capacity utilisation factor	Coefficient < 1

A5, Installation in the building:

The accompanying table quantifies the parameters for installing the product at the building site. All installation materials and their waste processing are included.

PARAMETER	VALUE/DESCRIPTION
Wastage of materials on the building site before waste processing, generated by the product's installation (specified by type)	According to PCR EN 17074, no waste is considered
Output materials (specified by type) as results of waste processing at the building site e.g. of collection for recycling, for energy recovering, disposal (specified by route)	None
Ancillary materials for installation (specified by materials)	According to PCR NF EN 17074, nonancillary materials considered
Other resource use	None
Quantitative description of energy type (regional mix) and consumption during the installation process	According to EN 15804+A1, the energy needed during the installation is less than 0,1% of the total life cycle energy. It's include in the cut-off-rules.
Direct emissions to ambient air, soil and water	None

B1-B7, Use stage (excluding potential savings)

Description of the stage: the use stage is divided into the following modules:

- B1: Use
- B2: Maintenance
- B3: Repair
- B4: Replacement
- B5: Refurbishment
- B6: Operational energy use
- B7: Operational water use

B2, Maintenance:

PARAMETER	VALUE
Maintenance process	Water and cleaning agent
Maintenance cycle	Annual average
Ancillary materials for maintenance (e.g. cleaning agent, specify materials)	cleaning agent: 0,001 kg/m ² of glass/year
Wastage material during maintenance (specify materials)	0 kg
Net fresh water consumption during maintenance	0,2 kg/m ² of glass/year
Energy input during maintenance	None required during product lifetime

Description of the scenarios and additional technical information:

The product has a reference service life of 30 years. This assumes that the product will last in situ with no requirements for repair, replacement or refurbishment throughout this period. Therefore, it has no impact at this stage, except for maintenance.

According to PCR EN 17074, only the maintenance by cleaning glass with water and cleaning agent is included in this study.

C1-C4, End of Life Stage

Description of the stage: this stage includes the next modules:

- C1, Deconstruction, demolition : The de-construction and/or dismantling of the product take part of the demolition of the entire building. In our case, a small amount of energy is considered 0.05 MJ/m².
- C2, Transport to waste processing
- C3, Waste processing for reuse, recovery and/or recycling
- C4, Disposal

End of life scenario used in this study is:

100% of glass is landfilled and the distance to the landfill site considered is 50 km.

Description of the scenarios and additional technical information:

PARAMETER	VALUE/DESCRIPTION
Thickness (mm)	6 mm
Collection process specified by type	15 kg collected per 1 m ² 0 kg collected with no separation between construction product
Recovery system specified by type	0 kg reuse 0 kg recycled 0 kg for energy recovery
Disposal specified by type	15 kg disposed of in landfill per 1 m ²
Assumptions for scenario development (e.g. transportation)	50 km to landfill site and 0 km for recycling site

D, Reuse/recovery/recycling potential

An end of life recycling 0% (100% of glass wastes are landfilled) has been assumed using local demolition waste data and adjusted considering the recyclability of the product.

LCA results








Product Environmental Footprint (PEF) method has been used as the impact model. Specific data has been supplied by the plant, and generic data come from GABI and Ecoinvent databases.

All emissions to air, water, and soil, and all materials and energy used have been included.

Raw materials and energy consumption, as well as transport distances have been taken directly from the manufacturing plant (Production data according to Aug 2021-Aug 2022)










All result tables refer to a functional unit of 1 m² of flat glass and an expected average service life of 30 years.

Environmental Impacts

Environmental indicators		PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE			REUSE, RECOVERY RECYCLING
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal
	Climate Change [kg CO2 eq.]	1.89E+01	7.32E-01	0	0	9.50E-02	0	0	0	0	0	3.66E-02	0	2.10E-01	0
	Climate Change (fossil) [kg CO2 eq.]	1.90E+01	7.27E-01	0	0	8.08E-02	0	0	0	0	0	3.64E-02	0	2.28E-01	0
	Climate Change (biogenic) [kg CO2 eq.]	-1.76E-01	-1.26E-03	0	0	-5.86E-02	0	0	0	0	0	-6.28E-05	0	-1.80E-02	0
	Climate Change (land use change) [kg CO2 eq.]	4.13E-02	5.96E-03	0	0	7.28E-02	0	0	0	0	0	2.98E-04	0	6.55E-04	0
	Ozone depletion [kg CFC-11 eq.]	5.46E-07	8.84E-17	0	0	4.39E-09	0	0	0	0	0	4.42E-18	0	8.43E-16	0
	Acidification terrestrial and freshwater [Mole of H+ eq.]	8.56E-02	3.12E-03	0	0	4.99E-04	0	0	0	0	0	1.56E-04	0	1.63E-03	0
	Eutrophication freshwater [kg P eq.]	7.91E-04	2.24E-06	0	0	3.23E-05	0	0	0	0	0	1.12E-07	0	3.91E-07	0
	Eutrophication marine [kg N eq.]	1.91E-02	1.47E-03	0	0	5.33E-04	0	0	0	0	0	7.33E-05	0	4.20E-04	0
	Eutrophication terrestrial [Mole of N eq.]	2.51E-01	1.63E-02	0	0	1.38E-03	0	0	0	0	0	8.14E-04	0	4.62E-03	0
	Photochemical ozone formation - human health [kg NMVOC eq.]	5.00E-02	3.94E-03	0	0	3.22E-04	0	0	0	0	0	1.97E-04	0	1.27E-03	0
	Resource use, mineral and metals [kg Sb eq.] ¹	4.53E-06	5.27E-08	0	0	2.55E-06	0	0	0	0	0	2.64E-09	0	2.04E-08	0
	Resource use, energy carriers [MJ] ¹	2.01E+02	9.79E+00	0	0	1.38E+00	0	0	0	0	0	4.90E-01	0	2.98E+00	0
	Water deprivation potential [m³ world equiv.] ¹	1.55E+00	6.57E-03	0	0	3.27E-01	0	0	0	0	0	3.29E-04	0	2.38E-02	0








¹ The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Resources Use

Resources Use indicators	PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE			D REUSE, RECOVERY, RECYCLING	
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
 Use of renewable primary energy (PERE) [MJ]	2.31E+01	5.50E-01	0	0	7.69E-01	0	0	0	0	0	0	2.75E-02	0	3.91E-01	0
 Primary energy resources used as raw materials (PERM) [MJ]	1.44E+00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Total use of renewable primary energy resources (PERT) [MJ]	2.45E+01	5.50E-01	0	0	7.69E-01	0	0	0	0	0	0	2.75E-02	0	3.91E-01	0
 Use of non-renewable primary energy (PENRE) [MJ]	2.01E+02	9.80E+00	0	0	1.38E+00	0	0	0	0	0	0	4.90E-01	0	2.99E+00	0
 Non-renewable primary energy resources used as raw materials (PENRM) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Total use of non-renewable primary energy resources (PENRT) [MJ]	2.01E+02	9.80E+00	0	0	1.48E+00	0	0	0	0	0	0	4.90E-01	0	2.99E+00	0
 Input of secondary material (SM) [kg]	1.09E+00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Use of renewable secondary fuels (RSF) [MJ]	2.04E-21	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Use of non-renewable secondary fuels (NRSF) [MJ]	2.39E-20	0	0	0	0	0	0	0	0	0	0	0	0	0	0

 Use of net fresh water (FW) [m3]	4.19E-02	6.37E-04	0	0	7.61E-03	0	0	0	0	0	0	3.19E-05	0	7.53E-04	0
--	----------	----------	---	---	----------	---	---	---	---	---	---	----------	---	----------	---

Waste Category & Output flows



Waste Category & Output Flows	PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				D REUSE, RECOVERY, RECYCLING
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	R3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational	B7 Operational water	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
 Hazardous waste disposed (HWD) [kg]	5.71E-07	4.56E-07	0	0	7.69E-11	0	0	0	0	0	0	2.28E-08	0	4.55E-08	0
 Non-hazardous waste disposed (NHWD) [kg]	4.98E-01	1.50E-03	0	0	6.47E-03	0	0	0	0	0	0	7.50E-05	0	1.50E+01	0
 Radioactive waste disposed (RWD) [kg]	1.05E-03	1.21E-05	0	0	2.84E-06	0	0	0	0	0	0	6.07E-07	0	3.39E-05	0
 Components for re-use (CRU) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Materials for Recycling (MFR) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Material for Energy Recovery (MER) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Exported electrical energy (EEE) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

	Exported thermal energy (EET) [MJ]	0	0	0	0	0	0	0	0	0	0	0
---	------------------------------------	---	---	---	---	---	---	---	---	---	---	---

Additional voluntary indicators from EN 15804 (according to ISO 21930:2017)

Environmental indicators	PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE			REUSE, RECOVERY RECYCLING	
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
Respiratory inorganics [Disease incidences]	1.30E-06	1.46E-08	0	0	5.95E-09	0	0	0	0	0	0	7.29E-10	0	2.02E-08	0
Ionising radiation - human health [kBq U235 eq.]	2.78E-01	1.75E-03	0	0	5.53E-03	0	0	0	0	0	0	8.77E-05	0	3.49E-03	0
Ecotoxicity freshwater [CTUe]	8.95E+02	6.92E+00	0	0	4.22E+00	0	0	0	0	0	0	3.46E-01	0	1.71E+0	0
Cancer human health effects [CTUh]	2.09E-09	1.45E-10	0	0	1.83E-10	0	0	0	0	0	0	7.25E-12	0	2.53E-10	0
Non-cancer human health effects [CTUh]	2.08E-07	7.96E-09	0	0	1.69E-09	0	0	0	0	0	0	3.98E-10	0	2.79E-08	0
Land Use [Pt]	7.17E+01	3.44E+00	0	0	4.01E+00	0	0	0	0	0	0	1.72E-01	0	6.22E-01	0

Information on biogenic carbon content

		PRODUCT STAGE
Biogenic Carbon Content		A1 / A2 / A3
	Biogenic carbon content in product [kg]	0
	Biogenic carbon content in packaging [kg]	3.91E-02

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2.

There is no biogenic carbon in glass product. Every thickness considered in this EPD have the same value to biogenic carbon 0 kg C.

LCA interpretation

The following figure refers to a functional unit 1 m² of flat glass product.



[1] This indicator corresponds to the abiotic depletion potential of fossil resources.

[2] This indicator corresponds to the total use of primary energy.

[3] This indicator corresponds to the use of net fresh water.

[4] This indicator corresponds to the sum of hazardous, non-hazardous and radioactive waste disposed.

Global Warming Potential (Climate Change) (GWP)

When analyzing the above figure for GWP, it can clearly be seen that the majority of contribution to this environmental impact is from the production modules (A1 – A3). This is primarily because the sources of greenhouse gas emissions are predominant in this part of the life cycle. CO₂ is generated upstream from the production of electricity and is also released on site by the combustion of natural gas. Production of one of raw material will generate the second highest percentage of greenhouse gas emissions. We can see that other sections of the life cycle also contribute to the GWP; however, the production modules contribute to over 90% of the contribution.

Non-renewable resources consumptions

We can see that the consumption of non – renewable resources is once more found to have the highest value in the production modules. This is because a large quantity of natural gas is consumed within the factory. The contribution to this impact from the other modules is very small and primarily due to the non – renewable resources consumed during transportation.

Energy Consumptions

As we can see, modules A1 – A3 have the highest contribution to total energy consumption. Energy in the form of electricity and natural gas is consumed in a vast quantity during the manufacture of glass so we would expect the production modules to contribute the most to this impact category.

Water Consumption

As we don't use water in any of the other modules (A4 – A5, C1 – C4), we can see that there is no contribution to water consumption. For the production phase, water is used within the manufacturing facility and therefore we see the highest contribution here. However, we recycle a lot of the water on site so the contribution is still relatively low. We also use water during the use phase to cleaning the product.

Waste Production

Waste production does not follow the same trend as the above environmental impacts. The largest contributor is the end of life module. This is because 100% of the product is sent to landfill. However, there is still an impact associated with the production module since we do generate waste on site.


One is the energy consumed in the furnace and the other one is the impacts generated in the production of one of the main raw materials, the soda ash.

Soda ash is in the origin of more than 25% of the GWP, more than 32% of the Photochemical Ozone formation and more than 35% of the Resource use, energy carriers

Additional information:

Electricity information

TYPE OF INFORMATION	DESCRIPTION
Location	India
Geographical representativeness description	Split of energy sources in India - Coal - 52% - Renewable Energy Sources - 27% -Natural gas - 6% - Nuclear 2% - Hydro 12%
Reference year	August 2021 – August 2022
Type of dataset	Electricity mix is modeled considering the electricity mix data from CEA
Source	CEA
CO ₂ emission	0.680 kg CO ₂ /KWh

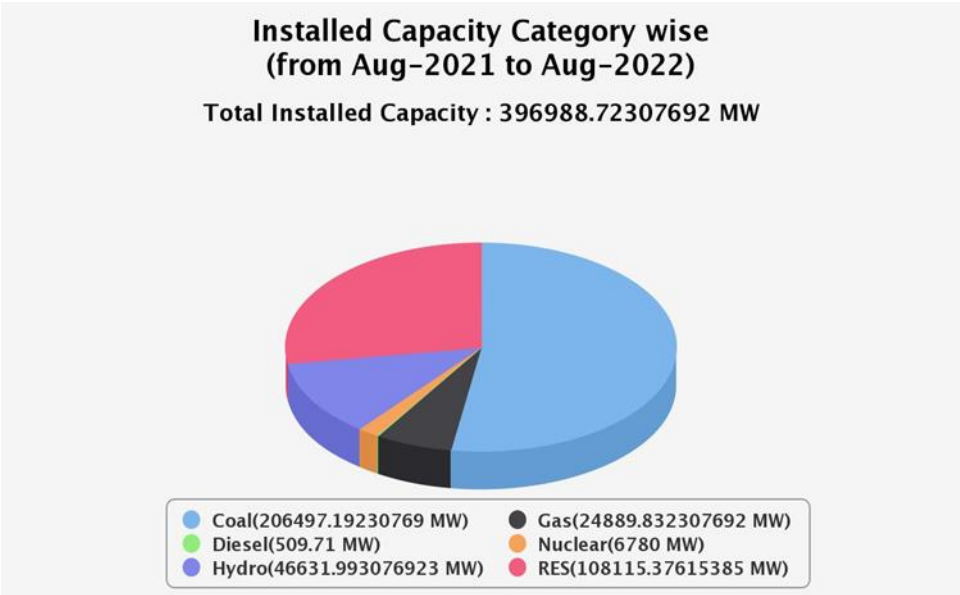

Data quality

Inventory data quality is judged by geographical, temporal, and technological representativeness. To cover these requirements and to ensure reliable results, first-hand industry data crossed with LCA background datasets were used. The data was collected from internal records and reporting documents from 2015-2019. After evaluating the inventory, according to the defined ranking in the LCA report, the assessment reflects fair inventory data quality.

Environmental impacts according to EN 15804:2012 + A1

The following tables presents results of Planilux 6 mm according to EN 15804 +A1.

Environmental impacts	PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				REUSE, RECOVERY, RECYCLING
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
Global Warming Potential (GWP) [kg CO ₂ eq.]	1.87E+01	7.17E-01	0	0	7.92E-02	0	0	0	0	0	0	0	3.59E-02	0	2.23E-01
Ozone depletion (ODP) [kg CFC 11eq.]	4.60E-07	1.18E-16	0	0	3.94E-09	0	0	0	0	0	0	0	5.89E-18	0	1.12E-15
Acidification potential (AP) [kg SO ₂ eq.]	6.55E-02	2.17E-03	0	0	3.82E-04	0	0	0	0	0	0	0	1.08E-04	0	1.31E-03
Eutrophication potential (EP) [kg (PO ₄) ₃ -eq.]	9.11E-03	5.27E-04	0	0	6.51E-04	0	0	0	0	0	0	0	2.64E-05	0	1.48E-04
Photochemical ozone creation (POCP) - [kg Ethylene eq.]	4.45E-03	7.98E-05	0	0	2.59E-05	0	0	0	0	0	0	0	3.99E-06	0	1.06E-04
Abiotic depletion potential for non-fossil resources (ADP-elements) [kg Sb eq.]	1.50E-04	5.96E-08	0	0	2.56E-06	0	0	0	0	0	0	0	2.98E-09	0	7.88E-08
Abiotic depletion potential for fossil resources (ADP-fossil fuels) [MJ]	1.97E+02	9.77E+0	0	0	1.29E+00	0	0	0	0	0	0	0	4.89E-01	0	2.90E+00

References

1. ISO 14040:2006: Environmental Management-Life Cycle Assessment-Principles and framework.
2. ISO 14044:2006: Environmental Management-Life Cycle Assessment-Requirements and guidelines.
3. ISO 14025:2006: Environmental labels and Declarations-Type III Environmental Declarations-Principles and procedures.
4. EN 16783:2017 Thermal insulation products - Product category rules (PCR) for factory made and in-situ formed products for preparing environmental product declarations
5. EN 15804:2019+A2 - Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
6. European Chemical Agency, Candidate List of substances of very high concern for Authorization.
http://echa.europa.eu/chem_data/authorisation_process/candidate_list_table_en.asp
7. The general program instructions (GPI) for the international EPD® (version 3.01: 2021)
8. ISO 21930: 2017 Sustainability in building construction – Environmental declaration of building products
9. PCR 2019:14 Construction products (EN 15804:2012: A2) version 1.2.5 and c-PCR-009 Flat glass products (EN 17074)
10. General Program Instruction of the International EPD® System, version 4.0
11. LCA report, Information for the Environmental Product Declaration of insulation products.