Environmental Product Declaration

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Hot rolled steel products

from

BE Group Oy Ab



Programme:	The International EPD [®] System, <u>www.environdec.com</u>
Programme operator:	EPD International AB
EPD registration number:	S-P-07996
Publication date:	2023-01-13
Valid until:	2028-01-10

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com











General information

Programme information

Programme:	The International EPD [®] System						
	EPD International AB						
Address:	Box 210 60						
Address:	SE-100 31 Stockholm						
	Sweden						
Website:	www.environdec.com						
E-mail:	info@environdec.com						

Accountabilities for PCR, LCA and independent, third-party verification

Product Category Rules (PCR)

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product Category Rules (PCR): 2019:14, Construction products, version 1.2.5. UN CPC code 412 – Products of iron or steel.

PCR review was conducted by: The Technical Committee of the International EPD® System. A full list of members available on www.environdec.com. The review panel may be contacted via <u>info@environdec.com</u>.

Chair of the PCR review: Claudia A. Peña.

Life Cycle Assessment (LCA)

LCA accountability: Ecobio Oy

Third-party verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

⊠ EPD verification by individual verifier

Third-party verifier: Pär Lindman, Miljögiraff AB

Approved by: The International EPD[®] System

Procedure for follow-up of data during EPD validity involves third party verifier:

 \Box Yes \boxtimes No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.





Company information

Owner of the EPD: BE Group Oy Ab

Contact: info@begroup.fi

Description of the organisation:

BE Group is a trading and service company, offering a broad range of steel, stainless steel and aluminium products. With extensive expertise and efficient processes in purchasing, logistics and production, we offer inventory sales, production service and direct deliveries to customers based on their specific needs for steel and metal products. The customers mainly operate in the manufacturing and construction industries in Finland, the Baltic States and Sweden.

<u>Product-related or management system-related certifications:</u> BE Group is certified according to ISO 14001 and ISO 9001.

Name and location of production sites: BE Group Oy Ab Lahti production site Vanhanradankatu 42, FI-15101 Lahti, Finland

BE Group Oy Ab Lapua production site Metsäkiventie 6, FI-62100 Lapua, Finland

BE Group Oy Ab Turku production site Paakarlantie 3, FI-20251 Turku, Finland

Product information

Product name: Hot rolled steel products

Product identification:

Hot rolled steel plates and sheets have their chemical composition, mechanical properties and other delivery conditions specified according to the European standards EN 10025 (1-6), EN 10049 (1-2) and EN 10028 (1-3) The dimensional tolerances for different products are specified according to The European standards EN 10029 and EN 10051.

Product description:

Hot rolled steels are used in many different industries and applications; the construction industry, automotive industry, heavy machinery, shipbuilding, pressure equipment and other metal structures and other various metal structures for example steel tube products.

Hot rolled steel plates and sheets can as all steel products at the end of life be 100 % recycled into new raw material.

<u>UN CPC code:</u> 4121 – Flat-rolled products of steel, not further worked than hot-rolled. <u>Geographical scope:</u>





Raw materials used for production come from Europe and Asia.

Transportation of final products to retail covers the main customer locations in Finland.

End-of-life activities are modelled based on global averages. Global average is considered as conservative approach although the main customer locations are in Finland.

LCA information

<u>Functional unit / declared unit:</u> 1 ton of hot rolled steel products

Reference service life:

The scenarios for modules B1-B5 are not given, thus the RSL is not specified in cradle to gate with options, modules C1–C4, and module D with additional module A4 type of EPD.

Time representativeness:

Data describing the acquisition of raw materials and manufacturing processes covers production year 2021.

Environmental product declarations used as background data for modelling are published less than five years ago.

Database data used for modelling is from 2022 for ecoinvent data and 2021 for Industry data 2.0 data.

Databases and LCA software used:

Databases used for modelling are ecoinvent 3.8 and Industry data 2.0 (Worldsteel data).

SimaPro LCA software version 9.4.0.2 was used for modelling.


Description of system boundaries:

Cradle to gate with options, modules C1–C4, module D and with optional module A4.





System diagram:

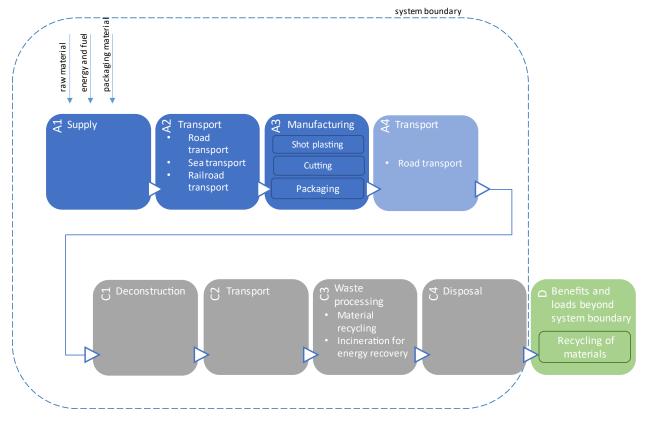

The material coming from the suppliers mostly comes as finished plates or sheets. The plates come individually without packaging and the sheets come packed in bundles. 45% of the products are shipped to customers as is and 55% of the products are cut to shape using different methods (fiber laser, CO2 laser, plasma or oxy-fuel cutting). As further processing for different work phases, the parts can be sandblasted, painted, edged, chamfered, drilled and machined. In some cases, especially with sheets, the materials are also pre-cut before shape cutting.

More information:

<u>LCA practitioner:</u> Ecobio Oy, info@ecobio.fi Explanatory material can be obtained from the EPD owner and/or LCA practitioner.

<u>Cut-off rule:</u> 1% cut-off rule was applied for input flows in the inventory.

Allocation:

Steel scrap produced in module A3 is treated as co-product and environmental impacts are allocated for it based on economic co-product allocation principles.





Scenarios:

Transports of Hot rolled steel products from Lahti to the construction site by road									
Parameter	Unit								
Vehicle type	Lorry, >32 metric ton								
Load capacity	37 % (ecoinvent 3.8)								
Distance	205 km								
Bulk density	8 000 kg/m3								

Transports of Hot rolled steel products from Turku to the construction site by road

Parameter	Unit
Vehicle type	Lorry, >32 metric ton
Load capacity	37 % (ecoinvent 3.8)
Distance	238 km
Bulk density	8 000 kg/m3

Transports of Hot rolled steel products from Lapua to the construction site by road

Parameter	Unit
Vehicle type	Lorry, >32 metric ton
Load capacity	37 % (ecoinvent 3.8)
Distance	226 km
Bulk density	8 000 kg/m3

End-of-life phase of Hot rolled steel products								
Parameter	Unit							
Collection process	Collected seperately							
Transportation	50 km road							
Recovery system	85% recycled							
Disposal	15% to landfill							





Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

		duct sta		Const proc	ruction cess age		Use stage				End of life stage				Resource recovery stage		
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling- potential
Module	A1	A2	A3	A4	A5	B1	B2	В3	В4	В5	B6	B7	C1	C2	C3	C4	D
Modules declared	Х	х	Х	х	ND	ND	ND	ND	ND	ND	ND	ND	х	х	х	х	Х
Geography	GLO	GLO	FI	FI	-	-	-	-	-	-	-	-	FI	FI	GLO	GLO	GLO
Specific data used		71 %	-			-	-	-	-	-	-	-	-	-	-	-	-
Variation – products		0 %				-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites		30 %				-	-	-	-	-	-	-	-	-	-	-	-





Content information

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Hot rolled steel	1,000	6,8 %	0 %
Paint	< 0,001	0,0 %	0 %
TOTAL	1,000	6,8 %	0 %
Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Cardboard	0,0004	0,04 %	0,0002
Polyethylene	0,0002	0,02 %	0
Steel	0,0002	0,02 %	0
Wood	0,0066	0,66 %	0,0033
TOTAL	0,0074	0,74 %	0,0035

Hot rolled steel products do not contain substances which exceed the limits for registration with the European Chemicals Agency regarding the "Candidate List of Substances of Very High Concern for authorisation".



Environmental Information

Potential environmental impact – mandatory indicators according to EN 15804 Results per 1 ton of hot rolled steel products

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
GWP- fossil	kg CO ₂ eq.	2,80E+03	2,04E+01	3,31E+00	8,31E+00	1,76E+02	7,90E-01	-1,32E+03
GWP- biogenic	kg CO ₂ eq.	1,21E+01	2,08E-02	1,24E-03	7,48E-03	2,38E+00	8,57E-04	-8,58E-01
GWP- luluc	kg CO ₂ eq.	7,59E-01	7,34E-03	3,30E-04	3,26E-03	1,30E-01	7,46E-04	1,92E-01
GWP- total	kg CO ₂ eq.	2,81E+03	2,04E+01	3,31E+00	8,32E+00	1,79E+02	7,91E-01	-1,33E+03
ODP	kg CFC 11 eq.	1,97E-05	4,87E-06	7,07E-07	1,92E-06	7,33E-06	3,20E-07	-7,20E-13
AP	mol H⁺ eq.	6,87E+00	8,52E-02	3,44E-02	3,37E-02	4,90E-01	7,43E-03	-2,38E+00
EP- freshwater	kg P eq.	2,22E-02	1,27E-03	1,03E-04	5,35E-04	2,53E-01	7,23E-05	-2,71E-04
EP- freshwater	kg PO4 ⁻³ eq.	8,21E-03	4,70E-04	3,79E-05	1,98E-04	9,37E-02	2,68E-05	-1,00E-04
EP- marine	kg N eq.	1,62E+00	2,60E-02	1,52E-02	1,02E-02	1,10E-01	2,58E-03	-3,54E-01
EP- terrestrial	mol N eq.	1,72E+01	2,84E-01	1,67E-01	1,11E-01	1,23E+00	2,83E-02	-3,46E+00
POCP	kg NMVOC eq.	3,93E+00	9,14E-02	4,59E-02	3,40E-02	3,73E-01	8,23E-03	-1,84E+00
ADP- minerals& metals*	kg Sb eq.	5,27E-03	4,68E-05	1,70E-06	2,89E-05	2,12E-02	1,80E-06	-2,81E-03
ADP- fossil*	MJ	2,23E+04	3,18E+02	4,54E+01	1,26E+02	1,41E+03	2,21E+01	-1,15E+04
WDP*	m ³	7,54E+01	1,09E+00	7,11E-02	3,76E-01	2,57E+02	9,93E-01	-2,60E+02
	Potential la	and use and land u	se change; ODP =	els; GWP-biogenic Depletion potentia rophication potenti	I of the stratosphe	ric ozone layer; AP	= Acidification pot	ential,

Acronyms

Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.





Potential environmental impact – additional mandatory and voluntary indicators

	Results per 1 ton of hot rolled steel products											
Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D				
GWP- GHG ¹	kg CO ₂ eq.	2,68E+03	2,04E+01	3,31E+00	8,32E+00	1,77E+02	7,91E-01	-1,32E+03				

Use of resources

	Results per 1 ton of hot rolled steel products											
Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D				
PERE	MJ	1,65E+03	4,05E+00	2,55E-01	1,77E+00	2,05E+02	1,88E-01	9,49E+01				
PERM	MJ	2,69E-01	0	0	0	0	0	0				
PERT	MJ	1,65E+03	4,05E+00	2,55E-01	1,77E+00	2,05E+02	1,88E-01	9,49E+01				
PENRE	MJ	2,26E+04	3,18E+02	4,54E+01	1,26E+02	1,41E+03	2,21E+01	-1,15E+04				
PENRM	MJ	0,00E+00	0	0	0	0	0	0				
PENRT	MJ	2,26E+04	3,18E+02	4,54E+01	1,26E+02	1,41E+03	2,21E+01	-1,15E+04				
SM	kg	6,80E+01	0	0	0	0	0	0				
RSF	MJ	0	0	0	0	0	0	0				
NRSF	MJ	0	0	0	0	0	0	0				
FW	m³	5,93E+00	3,79E-02	2,59E-03	1,40E-02	6,39E+00	2,36E-02	-5,84E+00				

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

¹ This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO_2 is set to zero.





Waste production and output flows

Waste production

	Results per 1 ton of hot rolled steel products											
Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D				
Hazardous waste disposed	kg	1,20E-01	7,70E-04	1,24E-04	3,28E-04	9,80E-04	3,34E-05	0,00E+00				
Non- hazardous waste disposed	kg	1,11E+02	2,98E+01	6,06E-02	6,46E+00	1,57E+02	1,50E+02	0,00E+00				
Radioactive waste disposed	kg	2,89E-01	2,15E-03	3,13E-04	8,50E-04	9,36E-03	1,45E-04	0,00E+00				

Output flows

Results per 1 ton of hot rolled steel products								
Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
Components for re-use	kg	0	0	0	0	0	0	0
Material for recycling	kg	0	0	0	0	850	0	0
Materials for energy recovery	kg	7,23	0	0	0	0,6	0	0
Exported energy, electricity	MJ	0	0	0	0	0	0	0
Exported energy, thermal	MJ	0	0	0	0	0	0	0





Additional environmental information

BE GROUP'S SUSTAINABILITY WORK

BE Group is working to reduce the Company's environmental impact and to be an economically, socially and ethically responsible actor. The sustainability issues are an important part of the operations and the goal is for them to be an integral part of daily activities and be taken into account in all strategic decisions and investments.

Read the Sustainability Report, which is a part of the Annual Report, here:

https://www.begroup.com/about-be-group/sustainability

PRIORITIZED AREAS

The sustainability work is based on the UN Global Compact's 10 principles for responsible business and this mean that we will:

Strive to create a safe, inclusive and stimulating workplace

Work in a goal-oriented way to limit the environmental and climate impact Be a reliable partner to our business partners, suppliers and customers

References

General Programme Instructions of the International EPD[®] System. Version 4.0. PCR 2019:14. Construction products. Version 1.2.5. LCA Report – BE Group Oy Ab's steel and aluminium products. 2022-11-22.

