




# Environmental Product Declaration

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

## Color-coated steel sheets (PGS, PES2, PSP2, PPG, PBG2)

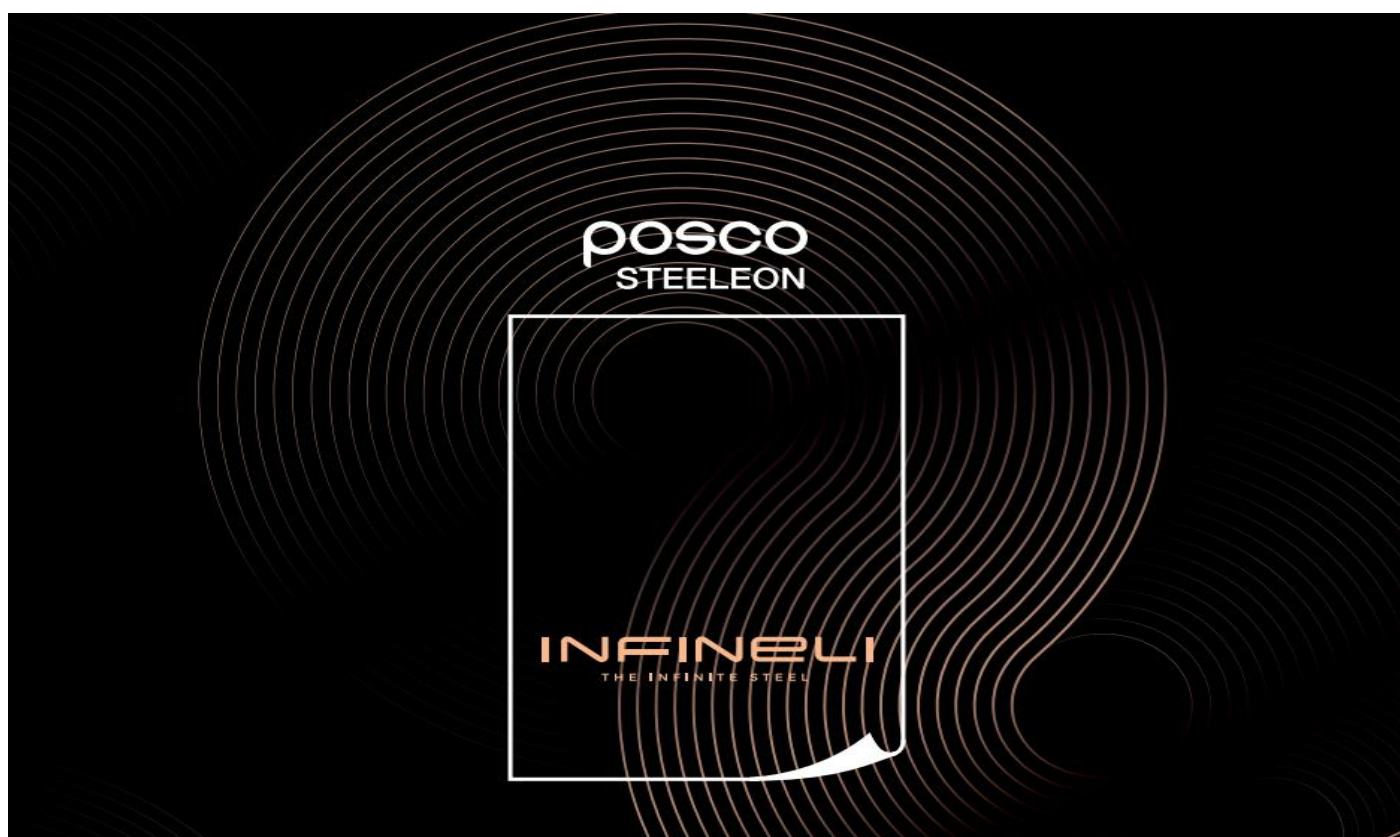

Programme:	The International EPD <sup>®</sup> System, <a href="http://www.environdec.com">www.environdec.com</a>
Programme operator:	EPD International AB
EPD registration number:	EPD-IES-0017495
Publication date:	2024-11-11
Valid until:	2029-11-11

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)*

***EPD of multiple products, based on the average results of the product group***

# General information

## Product information

<b>Programme:</b>	<b>The International EPD® System</b>
<b>Address:</b>	EPD International AB, Box 210 60, SE-100 31 Stockholm, Sweden.
<b>Website:</b>	<a href="http://www.envirodec.com">www.envirodec.com</a> ; <a href="http://www.environdecindia.com">www.environdecindia.com</a>
<b>E-mail:</b>	Info@envirodec.com

Product category rules (PCR): PCR 2019:14 Construction products, version 1.3.4
PCR review was conducted by: The Technical Committee of the International EPD® System. Chair: Massimo Marino Contact via info@environdec.com
Independent third-party verification of the declaration and data, according to ISO 14044:2006: EPD process certification <input type="checkbox"/> EPD verification <input checked="" type="checkbox"/>
Third party verifier: <name, organisation and signature of the third party verifier> Ik Kim(Smart-Eco co,)
Procedure for follow-up of data during EPD validity involves third party verifier: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

**The EPD owner has the sole ownership, liability, and responsibility for the EPD.**

EPDs within the same product category but registered in different EPD programs, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14044.

## LCA Study & EPD Design Conducted by

**Byungjik Lee,**

LCA Consultant, [bj.lee@ecoplus.kr](mailto:bj.lee@ecoplus.kr); [www.ecoplus.kr](http://www.ecoplus.kr)

**Sungwon Hwang,**

LCA Consultant, [sw.hwang@ecoplus.kr](mailto:sw.hwang@ecoplus.kr); [www.ecoplus.kr](http://www.ecoplus.kr)

POSCOSTEELEON products has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14044.

EPDs within the same product category but registered in different EPD programs, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14044.

## Company information

### Owner of the EPD:

POSCOSTEELEON Company Limited

### Head office Address :

173, Cheolgang-ro, Nam-gu, Pohang-si, Gyeongsangbuk-do

### Factory Address :

243, Daesong-ro, Nam-gu, Pohang-si, Gyeongsangbuk-do

### Contacts:

[jklee3624@poscosteeleon.com](mailto:jklee3624@poscosteeleon.com)

### For more information on this environmental statement, please contact:

Tel : 054-280-6653

Fax : 054-280-6623


E-mail : [jklee3624@poscosteeleon.com](mailto:jklee3624@poscosteeleon.com)

## Company Overview

Since its founding in 1988 as a specialist in steel surface treatment, POSCO STEELEON has led the plated/colored steel sheet market by pursuing continuous technological innovations and supplying products of the highest quality. Our main products are aluminum-, zinc-plated and color-coated steel sheets, which are supplied to various industrial sectors including the construction, home appliance, and automobile sectors in major global markets such as North America, China, and Europe. Based on our consolidated financial statements for 2023, our domestic sales amounted to KRW 668 billion (approximately 57.7%), while our overseas sales amounted to General Status KRW 491 billion (approximately 42.3%).

## POSCOSTEELEON's Carbon Neutrality Action Plan

We are committed to implementing eco-friendly management to protect the global environment according to our previous declaration of "2050 Carbon Neutrality". To achieve this, POSCO STEELEON has set a stepby-step reduction target of 21% in 2030 and 50% in 2040, and has established a plan to gradually increase the related investment amount. The reduction target was determined based on the average emissions from 2017 to 2019. Some 54% of our GHGs are generated from direct emissions. In order to achieve the 21% reduction target by 2030, we will implement detailed plans in 10-year increments based on the reduction performance of direct and indirect emissions.

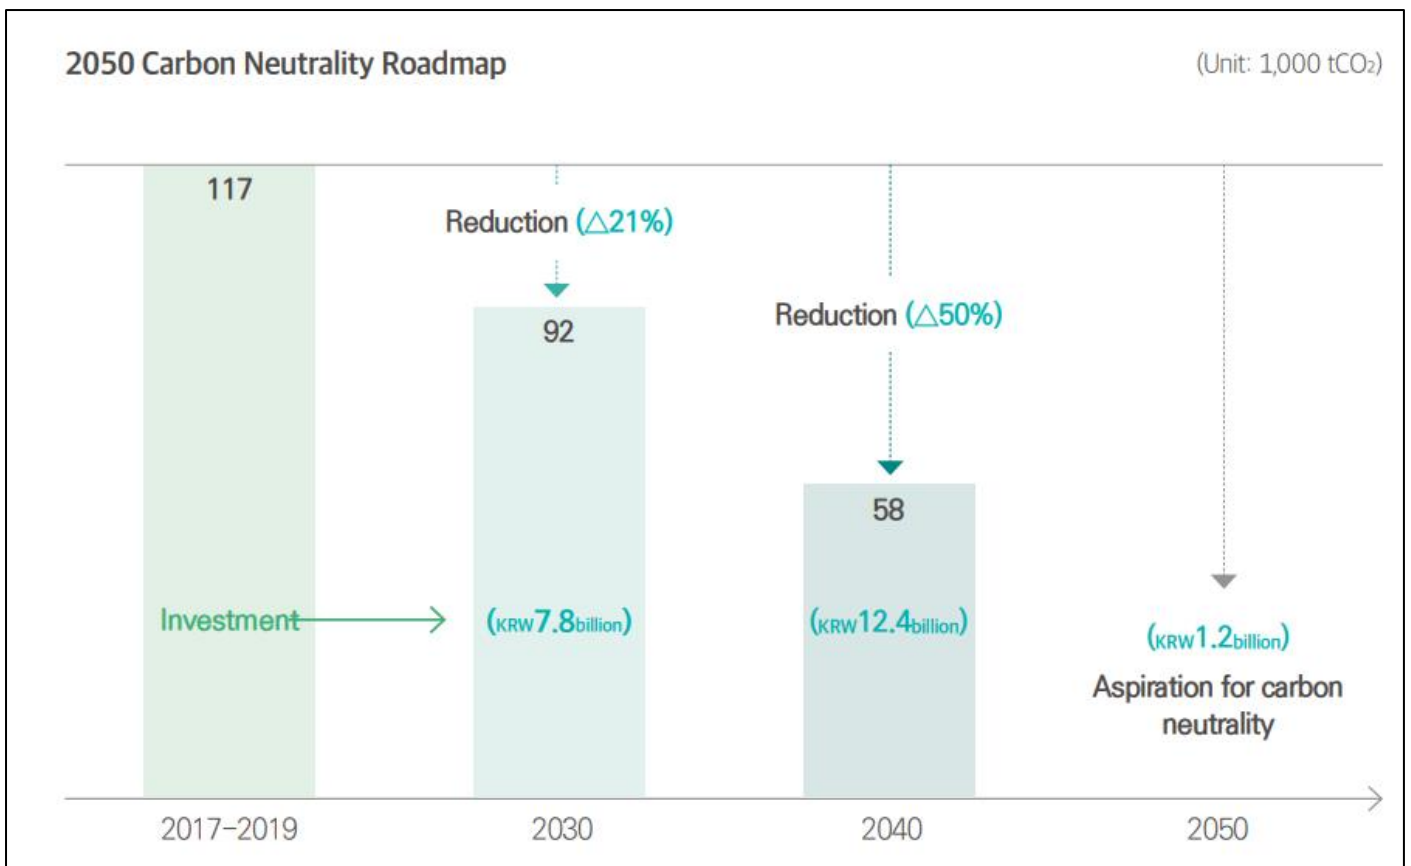

## Products Information

The following Life Cycle Assessment study is about the production of 7 types of Color-coated steel sheets used for various purposes depending on the Color-coated properties.

**Product name :** Color-coated steel sheets

**The productive process includes:**

POSCO STEELEON manufactures unrivaled, high-quality color-coated steel sheets based on its outstanding coated steel sheet technology. PosART, our major color-coated steel sheet, is manufactured by combining steel with the inkjet printing technology developed and patented by POSCO and an ink solution with high-corrosion resistance and processability. It is used in the production of commemorative medals, high-end home appliances, and interior and exterior building materials, and can be designed precisely to meet all customer needs. In addition, it has created a new sensation to the steel industry by adding safe and eco-friendly features, and led to the “premiumization” of color-coated steel sheets such as PosNC, our non-flammable color steel sheet.

**UN CPC Code :** 41231

**Geographical scope :**

A1-A3 : South Korea, C-D : Europe

It is assumed that the product is produced in Korea, but use and disposal are carried out in Europe.

## Description of the product:

### 1) PGS

**PGS is represent building materials color sheet.**

PGS Color Steel Sheet is a durable polyester resin-coated product that can be used in a wide range of applications, from interior and exterior building materials to household appliances. The product offers excellent processability, weather resistance, durability, and a wide range of colors and glosses, making it suitable for use in a variety of settings, including interior and exterior building materials and assembled metal partitions.

### 2) PES2

**PES2 is POS-TONE (high durability big wrinkle polyester steel)**

PES2 is a premium steel sheet offering exceptional durability and suitability for use in building materials. PES2 is a soft and warm color product with a luxurious appearance, created using a stone powder-like texture. The texture is expressed by the size of the wrinkle, increasing in size compared to the existing POSMATT (150 $\mu$ m  $\rightarrow$  300 $\mu$ m). The product offers excellent processability, excellent chemical resistance, and corrosion resistance.

### 3) PSP2

**PSP2 is high weather resistant color sheet**

PSP2 is a colored steel sheet that enhances the durability of existing polyester-based paints, offering a cost-effective solution for improving the longevity of existing coatings. PSP2 is used in building interiors and exteriors where chemical, corrosion and weathering resistance is required. The product offers maintaining the aesthetics of the building by delaying discoloration and luster loss over time after construction, reduction of re-coating costs due to aging of buildings, extended life of building by improving weather resistance of construction PCM panel, excellent corrosion resistance and weather resistance.

#### 4) PPG

##### **PPG is pattern printed steel-building materials**

PPG is an ideal solution for finishing sophisticated and luxurious building products. Once applied to a cold-rolled steel sheet, the transparent clear coating provides a base for a variety of patterns created by a special printing process (GRAVURE-OFF SET). The product prints a wide range of patterns directly onto building materials and offers high corrosion and weather resistance. It can be applied to clear materials with a gloss or texture and can be used as a substitute for real materials. It can also be combined with various materials (CR, EGI, GI, AL) and paints (PE, PVDF).

#### 5) PBG2

##### **PBG2 is antibiotic Color Steel Sheet**

PBG2 is a colored steel sheet mixed with antibacterial agents, which offers excellent antibacterial properties along with weather and corrosion resistance. It effectively suppresses the reproduction of bacteria, viruses and fungi. PBG2 is characterized by its antibacterial function, which is achieved by the action of active oxygen in a special metal-ceramic. This process involves the sterilization of bacteria, mold, organic matter and ammonia gas through the pores of the ceramic, as well as the adsorption and deodorization of bacteria. The use of metal ions (Ag, An, Cu) and harmless, human-safe mixing additives ensures that the product is safe for use in a wide range of environments.



## LCA information

### Declared unit:

The declared unit is 1000 kg of manufactured stainless steel.

### Description of system boundaries:

Cradle to gate (A1-A3) with options, modules C1-C4, module D for manufactured stainless steel.

The below table is the life cycle stages covered and modules for the assessment.

According to the above system boundaries, the declared stages and associated mandatory modules are as follows.

(1) A1-A3: In this stage, the mandatory modules are A1, A2 and A3. Module A1 means raw material supply. Module A2 means transportation. Module A3 means manufacturing.

(2) C1-C4: In this phase, the mandatory modules are C1, C2, C3 and C4. Module C1 means De-installation/Demolition/Disassembly. Module C2 is transportation. Module C3 is waste processing. Module C4 is disposal.

(3) D: The benefits and loads beyond the system boundary stage is declared. The mandatory module is D. It means Reuse/ recovery/ recycling potential.

### Database(s) and LCA software used:

Ecoinvent v3.10 (allocation, cut-off by classification) database and SimaPro v9.6 software have been used for the LCA calculations. LCA methods used are EN 15804:2012+A2:201 compliant.

### EN 15804:2012+A2:2019/AC:2021 Method

The environmental impact calculation used to perform EN 15804:2012+A2:2019/AC:2021 was performed according to methodology EF 3.1

## 1. Data collection of the study

### 1.1. Introduction of data collection

As a result of the application of the cut-off rule, the data of coil and paint are collected.

Below life cycle stages are followed the PCR 2019:14 Construction products, version 1.3.4. The detailed data collection per life cycle stages is as follows.

### 1.2. Product stage

#### 1.3. Raw material supply(A1)

Coil and paint are subject to raw material input data collection due to the cutoff.

#### 1.4. Transportation(A2)

Coil and paint are targeted for data collection in the case of transport.

#### 1.5. Manufacturing(A3)

Coil and Paint are targeted for data collection in the case of raw material input.

Electricity, LNG, Steam, Water are targeted for data collection in the case of utility.

Waste paint etc., waste paint liquid, waste paint solids, waste oil liquid, waste oil solids, synthetic resins, wastewater sludge, synthetic rubber, waste filter, waste activated carbon, waste insulating oil, scrap, waste water, vapor are targeted for data collection in the case of waste.

## 1.6. Deconstruction demolition stage(C1)

C1 is the deconstruction-demolition stage. This stage refers to the energy consumption of RC buildings during their life cycle (2007, Bozdağ & M. Seçer).

According to the reference, the average energy consumption of the demolition process is 10 kWh/m<sup>2</sup>.

The average mass of a reinforced concrete building is about 1000 kg/m<sup>2</sup>.

A conservative assumption was made that the energy consumed in the demolition of a steel building is equivalent to the energy consumed in the demolition of a concrete building. The energy source is diesel fuel used in the working machinery. Therefore, the energy consumption during demolition is 0.01 kWh/kg. 0.01 kWh/kg was calculated by dividing 10 kWh/m<sup>2</sup> by 1000 kg/m<sup>2</sup>.

## 1.7. Transport stage(C2)

C2 is the transport stage. There is no data for this stage. So, the transport distance is assumed to be 100 km depending on the PEP PSR C-2 distance.

So, the distance from the demolition site to the treatment site by lorry is 100.00km. The mass is 1.00kg and the mass unit is applied.

The ton\*km calculation amount is 1.00E-01 ton\*km. It is calculated by multiplying the distance of 100.00km by the mass of 1.00kg (=0.01ton).

The database Transport, Freight, Lorry 16-32 metric tonnes is used.

## 1.8. EoL (End of Life) stage(C3-C4)

C3-C4 is the EoL (End of Life) stage. It is a steel product, so the recycling and reuse rates are applied according to the steel recycling rate. The recycling and reuse rate also applies to Module D.

Certification is used for Europe, so European recycling rate standards are applied.

In stage C3, the recycling rate of steel products is assumed to be 95%, based on the table 1 in Annex C of the European Commission's Product Environmental Footprint Guidance.

Firstly, the mass of the product is assumed to be 1 kg. Second, the 95% recycling rate is applied.

As a result, the amount of metal recycled is 0.95kg and the amount of metal buried is 0.05kg. This is calculated by subtracting 0.95 kg of recycled amount from 1 kg of product at stage C3.

In C4 it is the final disposal stage. Therefore, the 0.05 kg residual amount from stage C3 is applied. It is assumed that the remaining 5% of the steel is taken to a landfill for final disposal. The distance to the landfill is assumed to be 25 km and the mass is 1kg (=0.001 tonne). The result of the calculation of ton\*km is therefore 0.025 ton\*km. The linked dataset is Transport, freight, lorry 16-32 tonnes, which is the average freight load factor.

## 1.9. Reuse, recovery, recycling, potential stage(D)

Stage D is about the recycled and reused metals. So, the 95% recycling rate in stage C3 is applied, but the same amount is put back into the product, so the -0.95kg is applied and the dataset is the same as the dataset associated with the raw material coil in stage A1.

## 2. Data quality assessment

According to the requirements in PCR 2019:14 Construction products, version 1.3.4, application of generic and specific data shall follow the below table.

Modules	Module A1-A3		A4 and A5	B1-B7	C1-C4
	Production of commodities, raw materials	Product manufacture	Installation processes	Use processes	End-of-life processes
Process type	Upstream processes	Processes the manufacturer has influence over	Downstream processes		
Data type	Generic data	Manufacturer's average or specific data	Generic data		

Module A1-A3 is divided into 2 modules. One is the production of raw materials. In this module, generic data are publicly available. No specific data are used except for transport. Data on extraction and production of raw materials and production of primary and secondary packaging are not collected because there are so many suppliers that individual data collection is not possible. Therefore, the most similar database is linked. The other is product manufacture. In this module the specific data is collected and used.

Specific data includes actual manufacturing process for steel, waste generated during manufacturing and its treatment.

The data quality assessment is carried out on the specific data used according to EN 15804:2012+A2:2019. The data quality assessment shall cover the three areas, time-related coverage, geography coverage and technology coverage. The data quality assessment on these three areas is advanced on the basis of Annex E in the EN 15804:2012+A2:2019. In Annex E, the following schemes shall be applied for the data quality assessment of generic and specific data.

As a result, Geographical Representative, Technical Representative, Time Representative are as follows. First, the data quality of the geographical representative is "very good". This is because the specific data are used. Thus, the dataset is fully representative for the geography specified in the "location" specified in the metadata.

Second, the data quality of the technical representative is "very good". This is because there is only one plating plant. The technology used is therefore accurately described.

Finally, the data quality of the time representative is "very good". Because the range of specific data collected is "2023.01 ~ 2023.12"

and the used version of ecoinvent is 3.10, so the "data set valid until" and the difference between the "valid until" and the "reference year" is not higher than 8 years.

## Data quality level and criteria from the Product Environmental Footprint Category Rules

Quality level	Geographical representative	Technical representative	Time representative
Very good	The processes included in the data set are fully representative for the geography stated in the "location" indicated in the metadata.	Technology aspects have been modelled exactly as described in the title and metadata, without any significant need for improvement	Data are not older than 0 years as expressed in the ILCD field("data set valid until" and the difference between the "valid until" and the "reference year" is not higher than 8 years)
Good	The processes included in the data set are well representative for the geography stated in the "location" indicated in the metadata.	Technology aspects are very similar to what described in the title and metadata, with need for limited improvements. For example: use of generic technologies' data instead of modelling all the single plants.	Data are not older than 3 years as expressed in the ILCD field("data set valid until" and the difference between the "valid until" and the "reference year" is not higher than 8 years)
Fair	The processes included in the data set are sufficiently representative for the geography stated in the "location" indicated in the metadata. E.g. the represented country differs but has a very similar electricity grid mix profile	Technology aspects are similar to what described in the title and metadata but merits improvements. Some of the relevant processes are not modelled with specific data but using proxies.	Data are not older than 6 years as expressed in the ILCD field("data set valid until" and the difference between the "valid until" and the "reference year" is not higher than 8 years)
Poor	The processes included in the data set are only partly representative for the geography stated in the "location" indicated in the metadata. E.g. the represented country differs and has a substantially different electricity grid mix profile	Technology aspects are different from what described in the title and metadata. Requires major improvements.	Data are not older than 10 years as expressed in the ILCD field("data set valid until" and the difference between the "valid until" and the "reference year" is not higher than 8 years, confirmed by the reviewer(s))
Very poor	The processes included in the data set are not representative for the geography stated in the "location" indicated in the metadata.	Technology aspects are completely different from what described in the title and metadata. Substantial improvement is necessary.	Data are older than 10 years as expressed in the ILCD field("data set valid until" and the difference between the "valid until" and the "reference year" is not higher than 8 years)

**Allocation:**

In a paint factory, there are 1, 2, 3, 4 CCL lines.

Each line produces a variety of painted products and detailed information is shown in Table 2. Utility consumption and waste generation are measured as follows. Electricity, LNG, tap water, steam, waste paint, etc., waste paint liquid, waste paint solids, waste oil liquid, waste oil solids, synthetic resins, waste water sludge, synthetic rubber, waste filter, waste activated carbon, waste insulating oil, and waste water data are measured based on the entire factory unit. Electricity and LNG consumption are also measured based on the 1, 2 CCL line.

**Painted products to be certified and corresponding production lines**

PGS	1, 2 CCL
PES2	1, 2 CCL
PSP2	1, 2 CCL
PPG	2, 4 CCL
PBG2	1, 2 CCL
PVS2	1 CCL
PCS	2, 3, 4 CCL

[Integrated] PGS, PES2, PSP2, PPG, PBG2

According to the above environmental assessment results, the variation percentage between the multiple similar products (PGS, PES2, PSP2, PPG, PBG2), which is calculated from the comparison based on the worst case, is 0.0~5.9%. See the table below for the exact amount.



Thus, the variation is below the 10% that the multiple similar products may be grouped together. This integrated case follows the PCR, 2019:14 Construction products, version 1.3.4.

Impact category	Worst case deviation ratio per impact category				
	PBG2	PES2	PGS	PPG	PSP2
	Total	Total	Total	Total	Total
<b>Climate change</b>	7.1%	3.3%	4.1%	3.7%	0.0%

According to the PCR, if impact categories deviation ratio is over the 10%, the calculation performance should be separately described.

There are some impact categories over the 10% of result deviation (calculation standard is the worst case of separate impact category calculation result) ratio between 6 products. The calculation method is Environmental Footprint 3.1. The impact categories exceeding 10% of the result deviation are shown in the table below.

Category	Worst case deviation ratio per impact category				
	PBG2	PES2	PGS	PPG	PSP2
	Total	Total	Total	Total	Total
Climate change	7.1%	3.3%	4.1%	3.7%	0.0%
Climate change - Biogenic	9.4%	6.9%	6.8%	4.9%	0.0%
Climate change - Fossil	6.0%	2.8%	3.5%	2.7%	0.0%
Climate change - Land use and LU change	80.9%	37.4%	45.8%	67.8%	0.0%
Ozone depletion	21.9%	16.1%	16.9%	0.0%	11.6%
Acidification	8.8%	3.8%	4.7%	4.9%	0.0%
Eutrophication, marine	10.4%	4.6%	5.6%	5.4%	0.0%
Eutrophication, freshwater	4.7%	1.5%	2.1%	1.1%	0.0%
Eutrophication, terrestrial	7.1%	3.0%	3.7%	2.0%	0.0%
Photochemical ozone formation	8.8%	3.8%	4.6%	3.2%	0.0%
Resource use, minerals and metals	17.9%	12.8%	12.9%	10.7%	0.0%
Resource use, fossils	10.6%	6.3%	6.9%	0.0%	3.1%
Water use	10.0%	4.7%	5.7%	6.9%	0.0%
Particulate matter	6.5%	2.9%	3.6%	5.1%	0.0%
Ionising radiation	12.8%	10.3%	10.1%	0.0%	8.6%
Ecotoxicity, freshwater	14.2%	5.2%	7.2%	12.5%	0.0%
Human toxicity, cancer	1.7%	0.0%	1.1%	5.3%	6.0%
Human toxicity, non-cancer	2.5%	1.4%	1.6%	1.6%	0.0%
Land use	28.6%	13.0%	16.0%	22.7%	0.0%

[Raw material input]

In the case of a paint factory, raw material inputs are managed by line, except paint. Only paint is managed by product. For each line, the monthly production ratio of each product to the total production of certified products was calculated. The monthly input by line of raw materials used in certified products was allocated by multiplying the monthly production ratio of each certified product.

[Utility & Waste]

In a paint factory, PGS, PES2, PSP2, PPG, PBG2 and PVS2 are produced on multiple lines. To allocate the utility per product, each line's utility usage was first based on production volume. The ratio of certified products to total production was multiplied by each line's monthly usage to calculate the data for products separated by line. For products produced by multiple lines, the monthly data for each line of the product was calculated by summing the monthly data of each line of the product. Electricity consumption and LNG production managed by each line were calculated by calculating the ratio of the monthly production of each product to the total monthly production of each line of certified products.

**Cut-off rules:**

More than 95% of the total inflows (mass and energy) per modules are considered, in compliance with the used PCR. This PCR is designed to apply the extended cut-off rule of ISO 21930, and thus the cut-off was carried out by including substances with an environmental impact of up to 95%.

Category			Total	Cumulative mass contribution	cut-off
Raw material	Input	Coil	1.33E+08	97.84%	
Raw material	Input	Paint	2.42E+06	99.61%	
Raw material	Input	Thinner	3.90E+05	99.90%	cut-off
Raw material	Input	Pretreatment (RC300)	5.37E+04	99.94%	cut-off
Raw material	Input	#110A	2.44E+04	99.96%	cut-off
Raw material	Input	Pretreatment (#3300)	2.08E+04	99.97%	cut-off
Raw material	Input	PL-4015M	1.18E+04	99.98%	cut-off
Raw material	Input	#120B	8.37E+03	99.99%	cut-off
Raw material	Input	#120A	7.44E+03	99.99%	cut-off
Raw material	Input	#110B	5.34E+03	99.99%	cut-off
Raw material	Input	#1455T	3.28E+03	100.00%	cut-off
Raw material	Input	PL-4015M (Surface treatment)	3.17E+03	100.00%	cut-off
Raw material	Input	PL-4015R	4.90E+02	100.00%	cut-off

## Content information

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
<b>Coil / Galvanized steel sheet</b>	1.00E+00	97.84%	0.00E+00
<b>Paint / Paint</b>	2.22E-02	1.77%	0.00E+00
<b>ETC</b>	1.07E-03	0.39%	0.00E+00
<b>TOTAL</b>	1.02E+00	100%	0.00E+00

## System diagram

The table 1 below shows three mandatory life cycle stages. A description of the life cycle stages is described in the system boundary section at the right upper side.

### Types of EPD with respect to life cycle stages covered and modules for the assessment

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

(X: Declared modules, ND: Not declared modules, M: Mandatory, O: Optional)

Category			Declaration	Cradle to gate with options	Geography	Specific data used	Variation – products	Variation – sites
Product stage	Raw material supply	A1	X	M	KR RoW GLO	80% *	<7.1%	0% (only one site)
	Transportation	A2	X					
	Manufacturing	A3	X					
Construction /Installation stage	Transportation	A4	ND	O				
	Construction/Installation /Assembly	A5	ND	O				
Use stage	Use	B1	ND	O				
	Maintenance(Incl. transportation)	B2	ND	O				
	Repair(Incl. transportation)	B3	ND	O				
	Replacement(Incl. transportation)	B4	ND	O				
	Refurbishment(Incl. transportation)	B5	ND	O				
	Operational energy use	B6	ND	O				
	Operational water use	B7	ND	O				
End of life stage	De-installation/ demolition/ disassembly	C1	X	M	GLO			
	Transportation	C2	X	M	GLO			
	Waste processing	C3	X	M	GLO			
	Disposal	C4	X	M	GLO			
Benefits and loads beyond the system boundary	Reuse/ recovery/ recycling potential	D	X	M	GLO			

\*The data considered in A1-A3 are gathered from the actual manufacturing plants where productspecific processes are carried out. However, considering the limitation on some of the background data such as the EPD, the percentage of specific data is assumed to be at least 80%.

## Environmental Performance

The tables below show the results of the overall calculation for the 1,000kg of manufactured stainless steel. The environmental impact is calculated over the parameters of the categories in the above tables, according to EN 15804:2012+A2:2019/AC:2021.

### Potential environmental impact – mandatory indicators

Results for 1,000kg of Color-coated steel sheet							
Indicator	Unit	A1-A3	C1	C2	C3	C4	D
GWP-fossil	kg CO2 eq	3.76.E+00	1.64.E-03	3.03.E-03	1.27.E+01	7.56.E-04	-1.78.E+00
GWP-biogenic	kg CO2 eq	2.21.E+03	1.01.E+01	1.92.E+01	3.20.E+01	4.79.E+00	-1.37.E+03
GWP-luluc	kg CO2 eq	1.89.E+01	5.00.E-04	7.78.E-03	2.12.E-02	1.95.E-03	-8.08.E-01
GWP-total	kg CO2 eq	2.23.E+03	1.01.E+01	1.92.E+01	4.47.E+01	4.79.E+00	-1.38.E+03
ODP	kg CFC11 eq	2.31.E-05	1.22.E-07	2.84.E-07	3.50.E-07	7.10.E-08	-7.71.E-06
AP	mol H+ eq	1.26.E+01	8.57.E-02	4.39.E-02	1.45.E-01	1.10.E-02	-6.08.E+00
EP-freshwater	kg P eq	2.63.E+00	1.18.E-02	1.02.E-02	6.46.E-02	2.55.E-03	-1.50.E+00
EP- marine	kg N eq	9.80.E-01	1.24.E-04	1.52.E-03	9.26.E-03	3.79.E-04	-5.58.E-01
EP-terrestrial	mol N eq	2.30.E+01	1.29.E-01	1.10.E-01	4.64.E-01	2.75.E-02	-1.31.E+01
POCP	kg NMVOC eq	7.84.E+00	4.73.E-02	6.15.E-02	1.49.E-01	1.54.E-02	-4.57.E+00
ADP-minerals&metals*	kg Sb eq	1.32.E-02	2.11.E-06	6.26.E-05	4.18.E-04	1.56.E-05	-4.43.E-03
ADP-fossil*	MJ	2.66.E+04	1.20.E+02	2.69.E+02	3.09.E+02	6.73.E+01	-1.47.E+04
WDP	m3	6.72.E+02	5.52.E-01	1.23.E+00	1.84.E+00	3.07.E-01	-5.25.E+02
<b>Acronyms</b>	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWPluluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for nonfossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption						

(\* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results

are high or as there is limited experience with the indicator)

### Potential Environmental Impact Additional Mandatory and Voluntary Indicators

Results for 1,000kg of Color-coated steel sheet							
Indicator	Unit	A1-A3	C1	C2	C3	C4	D
<b>GWP - GHG*</b>	kg CO2 eq	2.27.E+01	2.14.E-03	1.08.E-02	1.27.E+01	2.70.E-03	-2.59.E+00

(\* Disclaimer: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

### Use of Resources

Results for 1,000kg of Color-coated steel sheet							
Indicator	Unit	A1-A3	C1	C2	C3	C4	D
<b>PERE</b>	MJ	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00
<b>PERM</b>	MJ	1.48.E+03	3.49.E-01	3.59.E+00	3.34.E+01	8.96.E-01	-1.00.E+03
<b>PERT</b>	MJ	1.48.E+03	3.49.E-01	3.59.E+00	3.34.E+01	8.96.E-01	-1.00.E+03
<b>PENRE</b>	MJ	1.57.E+04	2.20.E+00	2.64.E+01	9.48.E+01	6.60.E+00	-9.18.E+03
<b>PENRM</b>	MJ	5.25.E+01	5.23.E-03	8.16.E-02	9.47.E-01	2.04.E-02	-1.58.E+01
<b>PENRT</b>	MJ	1.57.E+04	2.21.E+00	2.65.E+01	9.57.E+01	6.62.E+00	-9.19.E+03
<b>SM</b>	kg	1.77.E+01	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00
<b>RSF</b>	MJ	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00
<b>NRSF</b>	MJ	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00	0.00.E+00
<b>FW</b>	m3	6.72.E+02	5.52.E-01	1.23.E+00	1.84.E+00	3.07.E-01	-5.25.E+02



<p><b>Acronyms</b></p>	<p>PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water</p>
------------------------	--

### Waste production

Results for 1,000kg of Color-coated steel sheet							
Indicator	Unit	A1-A3	C1	C2	C3	C4	D
Hazardous waste disposed	kg	9.52.E-02	6.06.E-04	1.86.E-03	1.81.E-03	4.65.E-04	-6.10.E-02
Non-hazardous waste disposed	kg	8.86.E-01	2.35.E-04	4.98.E-03	5.47.E+01	1.25.E-03	-4.91.E-01
Radioactive waste disposed	kg	3.69.E-02	6.41.E-06	5.48.E-05	6.55.E-04	1.37.E-05	-1.42.E-02

### Output flows

Results for 1,000kg of Color-coated steel sheet							
Indicator	Unit	A1-A3	C1	C2	C3	C4	D
Component for re-use	kg	0.00.E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	1.25.E+04	0.00E+00	0.00E+00	0.00E+00	9.50E+05	0.00E+00
Materials for energy recycling	kg	0.00.E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, electricity	MJ	0.00.E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Radioactive waste disposed	MJ	0.00.E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

The energy used in A3 is all electricity, and the impact calculation was conducted based on 1000kg of electricity.

**Electricity GWP-GHG**

Results for 1,000kg of Color-coated steel sheets		
Indicator	Unit	Electricity
<b>GWP - GHG*</b>	kg CO <sub>2</sub> eq	5.89E+01

## Additional environmental information

The base material of the Color-coated steel sheets is iron. No substances required to be reported as hazardous are associated with the production of this product.

## Dangerous Substance

All chemicals used in the POSCOSTEELEON factory are managed in accordance with the Korean Toxic Chemicals Control Act. Substances listed on the Candidate List of Substances of Very High Concern (SVHC) for authorization published by European Chemicals Agency (ECHA) are contained in the Base and Primer paint but the amount is not in declarable quantities. It is less than 0.1% of the product weight.

## References

### **General Programme Instructions of the International EPD<sup>®</sup> System. Version 4.0.**

#### **International EPD PCR 2019:14**

Construction products, version 1.3.4

#### **EN 15804:2012+A2:2019**

Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction product

#### **ISO 14044:2006**

Environmental management — Life cycle assessment — Requirements and guidelines

### **POSCO STEELEON sustainability report 2023**

#### **Literature reference**

Institution of Civil Engineers Briefing:

Reuse and recycling rates of UK steel demolition arisings (Sansom and Avery) Energy consumption of RC buildings during their life cycle (2007, Bozdağ & M. Seçer)

### **Product Environmental Footprint Category, version 6.3**