


ENVIRONMENTAL PRODUCT DECLARATION

Trosil 10 mm
Trosil Tech

From:
Trocellen Italia S.p.A.

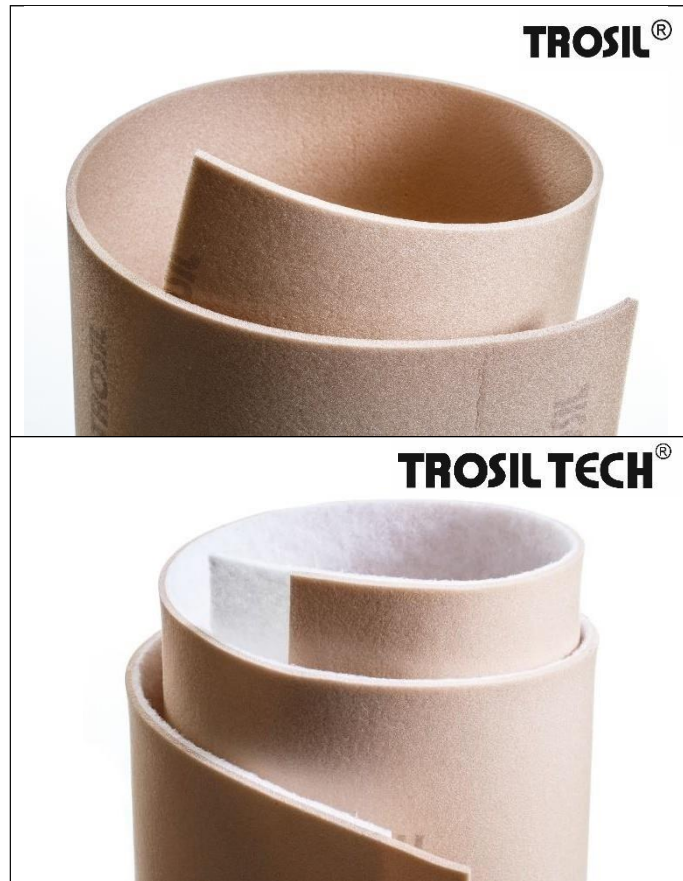

Programme: The International EPD® System
Programme operator: EPD International AB

UN CPC 363
Other plastic products

PCR 2019:14: "Construction products" version 1.11
SUB PCR: c-PCR-005 Thermal Insulation products (EN 16783)

Geographical scope: Global
EPD registration number: S-P-04714
Review date: 21-07-2023
Publication date: 03-03-2022
Valid until: 03-03-2027

In accordance with ISO 14025 and EN15804:2012+A2:2019

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com

BU-Insulation – Rev. August 2032

www.trocellen.com

TROCELLEN Italia S.p.A. Via della Chimica 21/23 – 20867 Caponago (MB)- Italy Ph. +39. 02 95.96.21 Fax +39. 02 95.96.22.35

1 INTRODUCTION

Type III Environmental Declarations contain verifiable and accurate information on the environmental performance of a product, quantified based on a life cycle impact assessment. Their objective is to produce reliable information expressed on a common basis that enables comparison of environmental performance between products performing the same function. In this perspective of product sustainability, Type III Environmental Declarations are developed in compliance with the requirements and prescriptions dictated by the voluntary standard EN ISO 14025:2010. To ensure that LCA studies are carried out consistently for all products within the same category, a precise set of rules and methodologies shall be respected. These rules are indicated by the PCR - Product Category Rules - which formulate specifications regarding the procedure of a life cycle analysis for a specific product category, ensuring results coherency and comparability.

2 COMPANY AND PRODUCT INFORMATION

2.1 TROCELLEN COMPANY¹

Trocellen is a multinational company owned by Furukawa Electric Co. Ltd, internationally renowned for the design and manufacture of crosslinked polyolefin foams. Through its different Business Units, the company is able to meet the specific needs of the market with a wide range of products and solutions.

It manufactures both semi-finished and finished products. The Trocellen products stand out for their manufacturing processes and the many industrial sectors in which they can be used: Insulation, automotive, footwear, sport and leisure, adhesive tapes and packaging. Trocellen makes safety a lifestyle and turns safety into a lifestyle.

Insulation Business Unit

The Insulation Business Unit mainly specialized in Sound and Thermal insulation for the building industry. The goal is to create comfortable environments for people or rather to “help people live better!”.

Certified quality

As a guarantee of providing stable, high-performance products and services Trocellen pays particular attention to quality assurance. We aim at monitoring and improving all our production, management and customer service processes. We dedicate ourselves to continuously developing all areas that might influence the performance of our products, services and have a positive effect on cooperation with our partners and on customer satisfaction.

¹ EPD owner: Trocellen Italia Spa
Head office: Via Della Chimica 21/23, 20867 Caponago (MB), Italy
Phone: +39 02 959621

Below there is the list of ISO certificates given to Trocellen Italia sites:

- ISO 45001 - Occupational Health and Safety Management Systems
- ISO 9001 – Quality management
- ISO 50001 – Energy management

2.2 THE PRODUCT RANGE

Trosil® product range is made of cross-linked polyolefin foam: sound insulation of new generation, against impact sound, manufactured by TROCELLEN for comfortable and quiet living. Produced using soft recipe foam offering excellent mechanical strength as well as sound and thermal insulation. It is recommended for application as screed underlay, working as uncoupling layer between screed and levelling substrate/structural floor and thus avoiding the transmission of impact sound. The Trosil Tech® version is laminated with polyester fiber in order to further improve the acoustic performance.

Main advantages:

- Flexible and elastic, easy to install
- Light and waterproof
- High mechanical strength
- Safe, non-toxic, non-allergen, mould resistant
- CFC and Halogen Free

TECHNICAL DATA				
TECHNICAL CHARACTERISTICS	NORM	UNIT	TROSIL	TROSIL TECH
Description			Chemically cross-linked PE foam	Chemically cross-linked PE foam laminated with polyester fiber
Density	EN ISO 845	kg/m ³	30	30*
Thickness	EN ISO 1923	mm	4 - 5 - 10	10
Colour	BASE Spec.	-	beige	PE beige - fiber white
Roll size		m	thickness: 4 mm: 1,50x50 - 5 mm: 1,50x50 10 mm: 1,50x40 - 10 mm (battered): 1,50x25	1,50x25
Compression stress strength	EN ISO 3386/1	kPa	10%: 13,6 - 25%: 31,6 - 50%: 89,9	10%: 2,27 - 25%: 8,77 50%: 34,18
Water absorption after 28 days	ISO 2896	Vol%	<3	<3*
Dimensional stability (< 5%)	ISO 2796	°C	75	85
Thermal conductivity coefficient at 10 °C (λ-value)	EN 12667	W/mK kcal/mh°C	0,0359 0,0317	0,0359* 0,0317*
Impact sound insulation ΔLw (mortar 180 kg/m ²)	EN ISO 140/6-8 EN ISO 717/2	dB	thickness: 4 mm: 28 - 5 mm: 28 - 10 mm: 36	thickness 10 mm: 33
Dynamic stiffness s't	EN 29052-1	MN/m ³	thickness: 4 mm: 73 (s't = s') 5 mm: 52 (s't = s') - 10 mm: 19 (s't = s')	thickness 10 mm: 9

* Values for PE foam

The information contained herein is based on our experiences. They are not legally guaranteed and are indicative only. It is up to designers and users to decide whether or not the product is suitable for its intended use. Also assuming liability arising from the use of the products mentioned. Trocellen Italia SpA reserves the right at any time to make changes to the packaging, size and colour, without notice, due to business needs.

Trocellen products have showed a service life of more than 23 years on site, with the same performance and no damage, thus demonstrating the long-lasting life of Trocellen products.

Following item specifications and content declaration related to assessed products.

TROSIL 10 mm

Chemically cross-linked closed cell polyolefin foam, CFC-free.

TROSIL 10 mm thick, density 30 kg/m³

Certified sound insulation ΔLw = 36 dB

Apparent dynamic stiffness s't = s' = 19 MN/m³.

Resistance 0,2725 (m²*K/W)

Table 1: Formula declaration per 1 kg of Trosil 10 mm

TROSIL 10 mm		% (kg/kg)
PRODUCT	Polymers	81,7%
	Additives (color pigment, blowing agent, Cross-linking agent, stabilizer)	16,4%
	PE film	1,9%
		(kg/kg)
PACKAGING	PE film	0,0094
	Cardboard tube	0,036

Note: Conversion to m² (0,30)

TROSIL TECH

Chemically cross-linked closed cell polyolefin foam, CFC-free.

TROSIL TECH density 30 kg/m³, laminated with non-woven polyester fiber, total thickness 10 mm, battened.

Certified sound insulation $\Delta L_w = 33$ dB

Apparent dynamic stiffness $s't = 9$ MN/m³

Dynamic Stiffness $s' = 20$ MN/m³.

Resistance 0,2857 (m²*K/W)

Table 2: Formula declaration per 1 kg of Trosil Tech

TROSIL TECH		% (kg/kg)
PRODUCT	Polymers	35,1%
	Additives	7,1%
	Non-woven Polyester fiber	56,2%
	PE film	1,6%
		(kg/kg)
PACKAGING	PE film	0,0257
	Cardboard tube	0,066

Note: Conversion to m² (0,30)

The products are manufactured at the company's own facilities and specifically in the following plants:

- Via Della Chimica, 21 – 23, 20867 Caponago (MB), Italy.

3 LCA INFORMATION

3.1 DECLARED UNIT

The declared unit is 1 m2 of final product.

3.2 REFERENCE SERVICE LIFE

Not applicable for the analysis.

3.3 TIME REPRESENTATIVENESS

The temporal boundaries include the period from January 2022 to December 2022, a time frame considered to be representative of the company's activities. These were chosen given the fullest availability of information relating to the analysis.

3.4 SYSTEM BOUNDARIES

In accordance with the reference standard EN 15804 and the PCR followed, the life cycle environmental impact assessment has the following boundaries: "from cradle to gate with modules C1-C4 and module D". (Figure 1, Table 6). Modules A4-A5 and B1-B7 were excluded. In the end-of-life phase, the product is only sent for disposal (landfill or incineration). Use stage has not been considered in the study: further considerations can be done about the energy saving according to insulation thermal properties of the product (See also 2.2 paragraph).

	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE			BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Decomstruction, demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	GLO	GLO	IT	-	-	-	-	-	-	-	-	-	-	IT	IT	IT	EU
Specific data used	9% Trosil 10mm 11% Trosil Tech			-	-	-	-	-	-	-	-	-	-	-	-	-	-

Variation - product	Not relevant	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - site	not relevant	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Figure 1: ND= Module not declared

Table 3 – Stage description

STAGE	INDICATOR	
A1 – Raw material supply	Raw material	UPSTREAM
	Energy consumption: Electrical/heat	
A2 – Transport	Raw material transportation Internal transportation	
A3 – Manufacturing	Materials (packaging)	CORE
	Waste transportation	
	Waste treatment	
C1 – De-construction demolition	Dismantling-related consumption	END OF LIFE
C2 – Transport	Waste transportation	
C3 – Waste processing	Waste treatment	
C4 – Disposal	Disposal	

In addition, the following assumptions have been made:

- Impacts associated with demolition (C1) are assumed to be neglectable. The eventual removal of the product does not require the use of electricity or other inputs. Removal can generally be done manually if necessary.
- The product at the end of its life is sent to landfill/incineration with appropriate CER code, therefore disposal at a distance of 53.1 km is assumed as a scenario.
- The product after demolition activities is not recovered (C3).
- The product after demolition activities is managed according to ISPRA statistics (Italian reference).
- The result of phase D is zero, because there are no end-of-life benefits (recycling, recovery and/or reuse).

3.5 SYSTEM SCHEME AND MANUFACTURING PROCESS

For each information module, characteristic environmental performance indicators were investigated. In selecting the data to be used for the study, preference was given to primary data that could be catalogued by the company. These data constitute the primary source of information for the inventory analysis. The latter can be grouped according to environmental performance indicators, to which the results of the environmental performance will then be referred. On the basis of these indicators, the software model was elaborated and the inventory analysis was then developed according to macro-consumptions referring to the declared unit that characterises the study. The block diagram relating to production is presented below (Figure 2).

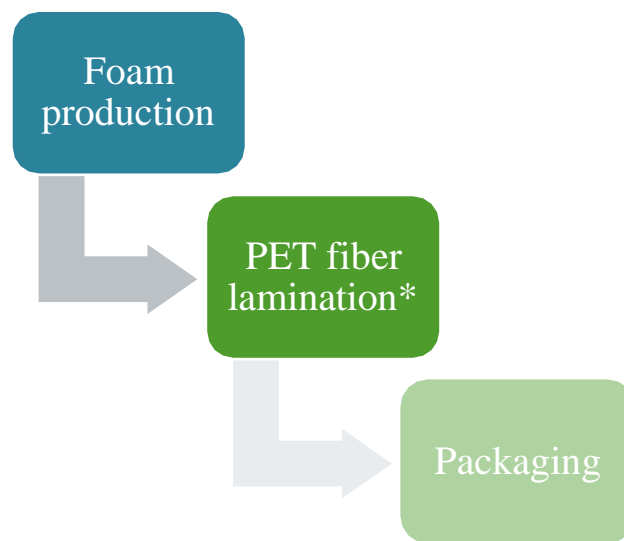


Figure 2 – Production process block diagram * for Trosil Tech only

3.6 DATABASE AND SOFTWARE

SimaPro calculation software (SimaPro 9) and the selected databases "ECOINVENT" were used for inventory processing and eco-profiles calculation.

4 ENVIRONMENTAL RESULTS

4.1 POTENTIAL ENVIRONMENTAL IMPACTS

Below are the results of the eco-profile obtained from the life cycle analysis of products subject to environmental declaration, along the impact categories in accordance with UNI EN 15804. The changes in the results found in this document compared to the previous EPD concern: the update of the Ecoinvent database, the update of the inventory data and the update of the declared unit which went from kg to m² of product.

Trosil 10 mm

Table 4: Ecoprofile assessment according to declared unit

CATEGORY IMPACT	UM	A1-A3	C1	C2	C3	C4	TOTALE	D
Global Warming Potential - total	kg CO2 eq.	2,47E+00	0,00E+00	2,63E-03	0,00E+00	2,98E-01	2,77E+00	0,00E+00
Global Warming Potential - fossil fuels	kg CO2 eq.	2,44E+00	0,00E+00	2,62E-03	0,00E+00	3,01E-02	2,48E+00	0,00E+00
Global Warming Potential - biogenic	kg CO2 eq.	2,41E-02	0,00E+00	7,00E-06	0,00E+00	2,67E-01	2,92E-01	0,00E+00
Global Warming Potential - land use and land use change (kg CO2 eq.	1,61E-03	0,00E+00	1,04E-06	0,00E+00	7,96E-06	1,62E-03	0,00E+00
Depletion potential of the stratospheric ozone layer	kg CFC-11 eq.	3,66E-07	0,00E+00	6,12E-10	0,00E+00	1,69E-09	3,69E-07	0,00E+00
Acidification potential, Accumulated Exceedance	mol H+ eq.	1,12E-02	0,00E+00	1,33E-05	0,00E+00	1,07E-04	1,14E-02	0,00E+00
Eutrophication potential - freshwater	kg P eq.	4,75E-04	0,00E+00	1,71E-07	0,00E+00	5,45E-06	4,81E-04	0,00E+00
Eutrophication potential - marine	kg N eq.	5,07E-03	0,00E+00	4,58E-06	0,00E+00	5,27E-04	5,60E-03	0,00E+00
Eutrophication potential - terrestrial	mol N eq.	2,11E-02	0,00E+00	5,01E-05	0,00E+00	4,00E-04	2,16E-02	0,00E+00
Photochemical ozone formation	kg NMVOC eq.	5,49E-03	0,00E+00	1,22E-05	0,00E+00	1,84E-04	5,68E-03	0,00E+00
Abiotic depletion potential - non-fossil resources*	kg Sb eq.	2,41E-05	0,00E+00	9,21E-09	0,00E+00	3,02E-08	2,42E-05	0,00E+00
Abiotic depletion potential - fossil resources*	MJ, net calorific value	4,15E+01	0,00E+00	3,92E-02	0,00E+00	1,36E-01	4,16E+01	0,00E+00

Water use*	m3 world eq. deprived	1,55E+00	0,00E+00	1,20E-04	0,00E+00	3,94E-03	1,55E+00	0,00E+00
Additional mandatory environmental impact indicators								
Global Warming Potential (GWP-GHG)**	kg CO2 eq.	2,37E+00	0,00E+00	2,61E-03	0,00E+00	1,91E-01	2,57E+00	0,00E+00
Additional voluntary environmental impact indicators								
Particulate Matter emissions	Disease incidence	1,01E-07	0,00E+00	1,89E-10	0,00E+00	8,33E-09	1,09E-07	0,00E+00
Ionizing radiation, human health	kBq U235 eq.	1,16E-01	0,00E+00	2,06E-04	0,00E+00	8,35E-04	1,17E-01	0,00E+00
Eco-toxicity - freshwater*	CTUe	3,00E+02	0,00E+00	3,12E-02	0,00E+00	3,45E+01	3,34E+02	0,00E+00
Human toxicity, cancer effect*	CTUh	3,48E-08	0,00E+00	3,26E-11	0,00E+00	1,94E-09	3,68E-08	0,00E+00
Human toxicity, non-cancer effects*	CTUh	1,63E-09	0,00E+00	1,01E-12	0,00E+00	3,44E-10	1,97E-09	0,00E+00
Land use*	dimensionless	5,45E+00	0,00E+00	2,75E-02	0,00E+00	2,11E-01	5,68E+00	0,00E+00
Indicators describing resource use								
Use of renewable primary energy as energy carrier (PERE)	MJ, net calorific value	1,03E+00	0,00E+00	4,23E-04	0,00E+00	4,88E-01	1,51E+00	0,00E+00
Use of renewable primary energy resources used as raw materials (PERM)	MJ, net calorific value	4,83E-01	0,00E+00	1,41E-04	0,00E+00	-4,83E-01	0,00E+00	0,00E+00
Total use of renewable primary energy (PERT)	MJ, net calorific value	1,51E+00	0,00E+00	5,64E-04	0,00E+00	5,03E-03	1,51E+00	0,00E+00
Use of non renewable primary energy as energy carrier (PENRE)	MJ, net calorific value	2,80E-03	0,00E+00	1,66E-06	0,00E+00	4,42E+01	4,42E+01	0,00E+00
Use of non renewable primary energy resources used as raw materials (PENRM)	MJ, net calorific value	4,40E+01	0,00E+00	4,00E-02	0,00E+00	-4,40E+01	0,00E+00	0,00E+00
Total use of non renewable primary energy resource (PENRT)	MJ, net calorific value	4,40E+01	0,00E+00	4,00E-02	0,00E+00	1,42E-01	4,42E+01	0,00E+00
Use of secondary material (SM)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels (RSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non renewable secondary fuels (NRSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water (FW)	m3	3,67E-02	0,00E+00	4,17E-06	0,00E+00	9,97E-05	3,68E-02	0,00E+00
Environmental information describing waste categories								
Hazardous waste disposed (HWD)	kg	3,38E-05	0,00E+00	1,04E-07	0,00E+00	4,42E-07	3,43E-05	0,00E+00
Non hazardous waste disposed (NHWD)	kg	2,62E-01	0,00E+00	2,06E-03	0,00E+00	2,85E-01	5,49E-01	0,00E+00
Radioactive waste disposed (RWD)	kg	5,24E-05	0,00E+00	2,71E-07	0,00E+00	7,99E-07	5,34E-05	0,00E+00
Environmental information describing output flows								
Components for re-use (CRU)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling (MFR)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery (MER)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Exported electrical energy (EEE)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported thermal energy (EET)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content								
Biogenic carbon content in product	kg C	Not significant						
Biogenic carbon content in accompanying packaging	kg C	5,24E-02						

* Disclaimer: The results of this environmental impact must be treated with caution due to the high uncertainties and limited experience with the indicator. ** The indicator includes all greenhouse gases included in the total GWP, but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is therefore equal to the GWP indicator originally defined in EN 15804: 2012 + A1: 2013

Trosil Tech

Table 5: Ecoprofile assessment according to declared unit

CATEGORY IMPACT	UM	A1-A3	C1	C2	C3	C4	TOTALE	D
Global Warming Potential - total	kg CO2 eq.	2,47E+00	0,00E+00	2,63E-03	0,00E+00	2,98E-01	2,77E+00	0,00E+00
Global Warming Potential - fossil fuels	kg CO2 eq.	2,44E+00	0,00E+00	2,62E-03	0,00E+00	3,01E-02	2,48E+00	0,00E+00
Global Warming Potential - biogenic	kg CO2 eq.	2,41E-02	0,00E+00	7,00E-06	0,00E+00	2,67E-01	2,92E-01	0,00E+00
Global Warming Potential - land use and land use change (kg CO2 eq.	1,61E-03	0,00E+00	1,04E-06	0,00E+00	7,96E-06	1,62E-03	0,00E+00
Depletion potential of the stratospheric ozone layer	kg CFC-11 eq.	3,66E-07	0,00E+00	6,12E-10	0,00E+00	1,69E-09	3,69E-07	0,00E+00
Acidification potential, Accumulated Exceedance	mol H+ eq.	1,12E-02	0,00E+00	1,33E-05	0,00E+00	1,07E-04	1,14E-02	0,00E+00
Eutrophication potential - freshwater	kg P eq.	4,75E-04	0,00E+00	1,71E-07	0,00E+00	5,45E-06	4,81E-04	0,00E+00
Eutrophication potential - marine	kg N eq.	5,07E-03	0,00E+00	4,58E-06	0,00E+00	5,27E-04	5,60E-03	0,00E+00
Eutrophication potential - terrestrial	mol N eq.	2,11E-02	0,00E+00	5,01E-05	0,00E+00	4,00E-04	2,16E-02	0,00E+00
Photochemical ozone formation	kg NMVOC eq.	5,49E-03	0,00E+00	1,22E-05	0,00E+00	1,84E-04	5,68E-03	0,00E+00
Abiotic depletion potential - non-fossil resources*	kg Sb eq.	2,41E-05	0,00E+00	9,21E-09	0,00E+00	3,02E-08	2,42E-05	0,00E+00

Abiotic depletion potential - fossil resources*	MJ, net calorific value	4,15E+01	0,00E+00	3,92E-02	0,00E+00	1,36E-01	4,16E+01	0,00E+00
Water use*	m3 world eq. deprived	1,55E+00	0,00E+00	1,20E-04	0,00E+00	3,94E-03	1,55E+00	0,00E+00
Additional mandatory environmental impact indicators								
Global Warming Potential (GWP-GHG)**	kg CO2 eq.	2,37E+00	0,00E+00	2,61E-03	0,00E+00	1,91E-01	2,57E+00	0,00E+00
Additional voluntary environmental impact indicators								
Particulate Matter emissions	Disease incidence	1,01E-07	0,00E+00	1,89E-10	0,00E+00	8,33E-09	1,09E-07	0,00E+00
Ionizing radiation, human health	kBq U235 eq.	1,16E-01	0,00E+00	2,06E-04	0,00E+00	8,35E-04	1,17E-01	0,00E+00
Eco-toxicity - freshwater*	CTUe	3,00E+02	0,00E+00	3,12E-02	0,00E+00	3,45E+01	3,34E+02	0,00E+00
Human toxicity, cancer effect*	CTUh	3,48E-08	0,00E+00	3,26E-11	0,00E+00	1,94E-09	3,68E-08	0,00E+00
Human toxicity, non-cancer effects*	CTUh	1,63E-09	0,00E+00	1,01E-12	0,00E+00	3,44E-10	1,97E-09	0,00E+00
Land use*	dimensionless	5,45E+00	0,00E+00	2,75E-02	0,00E+00	2,11E-01	5,68E+00	0,00E+00
Indicators describing resource use								
Use of renewable primary energy as energy carrier (PERE)	MJ, net calorific value	1,03E+00	0,00E+00	4,23E-04	0,00E+00	4,88E-01	1,51E+00	0,00E+00
Use of renewable primary energy resources used as raw materials (PERM)	MJ, net calorific value	4,83E-01	0,00E+00	1,41E-04	0,00E+00	-4,83E-01	0,00E+00	0,00E+00
Total use of renewable primary energy (PERT)	MJ, net calorific value	1,51E+00	0,00E+00	5,64E-04	0,00E+00	5,03E-03	1,51E+00	0,00E+00
Use of non renewable primary energy as energy carrier (PENRE)	MJ, net calorific value	2,80E-03	0,00E+00	1,66E-06	0,00E+00	4,42E+01	4,42E+01	0,00E+00
Use of non renewable primary energy resources used as raw materials (PENRM)	MJ, net calorific value	4,40E+01	0,00E+00	4,00E-02	0,00E+00	-4,40E+01	0,00E+00	0,00E+00
Total use of non renewable primary energy resource (PENRT)	MJ, net calorific value	4,40E+01	0,00E+00	4,00E-02	0,00E+00	1,42E-01	4,42E+01	0,00E+00
Use of secondary material (SM)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels (RSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non renewable secondary fuels (NRSF)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water (FW)	m3	3,67E-02	0,00E+00	4,17E-06	0,00E+00	9,97E-05	3,68E-02	0,00E+00
Environmental information describing waste categories								
Hazardous waste disposed (HWD)	kg	3,38E-05	0,00E+00	1,04E-07	0,00E+00	4,42E-07	3,43E-05	0,00E+00
Non hazardous waste disposed (NHWD)	kg	2,62E-01	0,00E+00	2,06E-03	0,00E+00	2,85E-01	5,49E-01	0,00E+00
Radioactive waste disposed (RWD)	kg	5,24E-05	0,00E+00	2,71E-07	0,00E+00	7,99E-07	5,34E-05	0,00E+00
Environmental information describing output flows								
Components for re-use (CRU)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Materials for recycling (MFR)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery (MER)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported electrical energy (EEE)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported thermal energy (EET)	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content								
Biogenic carbon content in product	kg C	Not significant						
Biogenic carbon content in accompanying packaging	kg C	5,24E-02						

*Disclaimer: The results of this environmental impact must be treated with caution due to the high uncertainties and limited experience with the indicator. ** The indicator includes all greenhouse gases included in the total GWP, but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is therefore equal to the GWP indicator originally defined in EN 15804: 2012 + A1: 2013

5 ADDITIONAL ENVIRONMENTAL INFORMATION

REACH Declaration:

None of the substances on the current version of the Candidate List of European Regulation 1907/2006/EC (REACH Registration, Evaluation, Authorisation and Restriction of Chemicals) is present in concentrations higher than 0.1% by weight in the mentioned articles.

CAM Compliance:

Trocellen Class product range are in compliance with CAM ("Criteri ambientali minimi" – Minimum environmental criteria") for construction according to Italian Law D.M. 11 Ottobre 2017 (<https://insulation.trocellen.com/cam/>).



LEED and WELL sustainability protocols:

Trocellen class product can support the achievement of LEED (Green Building council) and WELL (WELL building institute) sustainability certifications for buildings (<https://insulation.trocellen.com/leed-well/>).

6 REFERENCES

PCR 2019:14: "Construction products" version 1.11

SUB PCR: c-PCR-005 Thermal Insulation products (EN 16783)

EN 15804 – Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products

EN ISO 14025:2010 – Environmental labels and declarations - Type III environmental declarations - Principles and procedures

EN ISO 14040:2006 – Environmental management — Life cycle assessment — Principles and framework


EN ISO 14044:2018 – Environmental management — Life cycle assessment — Requirements and guidelines

GENERAL PROGRAMME INSTRUCTIONS FOR THE INTERNATIONAL EPD® SYSTEM VERSION 3.01 (2019-09-18)

Report LCA_TROCELLEN Rinnovo 2022 rev 02 – Date: 20/04/2023. Authors: Qualitynet srl in collaboration with EcamricertSrl.

PROGRAMME INFORMATION

Programme:	<p>The International EPD® System</p> <p>EPD International AB Box 210 60 SE-100 31 Stockholm Sweden</p> <p>www.environdec.com info@environdec.com</p>
-------------------	---

<p>ISO standard 21930 and CEN standard EN 15804 serve as main rules for product category (PCR)</p>
<p>Product category rules (PCR): PCR 2019:14: "Construction products" version 1.11 SUB PCR: c-PCR-005 Thermal Insulation products (EN 16783)</p>
<p>PCR review was conducted by: The Technical Committee of the International EPD® System. Review chair: Claudia A. Peña, University of Concepción, Chile. Review chair may be contacted on www.environdec.com/contact.</p>
<p>EPD registration number: S-P-04714</p>
<p>Independent third-party verification of the declaration and data, according to ISO 14025:2006 <input checked="" type="checkbox"/> External <input type="checkbox"/> Internal <input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification</p>
<p>Third party verifier: < DNV GL - Business Assurance > </p>
<p>Procedure for follow-up of data during EPD validity involves third party verifier: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No</p>

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

<p>EPD Owner</p>	<p>Trocellen Italia Spa</p>		<p>https://trocellen.com/it/ Contact: info@trocellen.com</p>
<p>Technical support</p>	<p>QUALITYNET SRL In collaboration with EcamRicert Srl</p>	  	<p>https://www.quality-net.it/ https://ecamricert.com/</p>